



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
100023135 TORQUE ASSIST 3 DRIVE
 Component
Gearbox
 Fluid
CASTROL ALPHASYN PG 220 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0922022	---	---
Sample Date		Client Info		02 Apr 2024	---	---
Machine Age	hrs	Client Info		1245	---	---
Oil Age	hrs	Client Info		1245	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>200	7	---	---
Chromium	ppm	ASTM D5185(m)	>15	0	---	---
Nickel	ppm	ASTM D5185(m)	>15	0	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)		0	---	---
Aluminum	ppm	ASTM D5185(m)	>25	0	---	---
Lead	ppm	ASTM D5185(m)	>100	0	---	---
Copper	ppm	ASTM D5185(m)	>200	0	---	---
Tin	ppm	ASTM D5185(m)	>25	0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>50	0	---	---
Potassium	ppm	ASTM D5185(m)	>20	2	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		2	---	---
Boron	ppm	ASTM D5185(m)		25	---	---
Barium	ppm	ASTM D5185(m)		2	---	---
Molybdenum	ppm	ASTM D5185(m)		0	---	---
Manganese	ppm	ASTM D5185(m)		0	---	---
Magnesium	ppm	ASTM D5185(m)		<1	---	---
Calcium	ppm	ASTM D5185(m)		2	---	---
Phosphorus	ppm	ASTM D5185(m)		428	---	---
Zinc	ppm	ASTM D5185(m)		5	---	---
Sulfur	ppm	ASTM D5185(m)		4839	---	---
Visc @ 40°C	cSt	ASTM D7279(m)	220	221	---	---

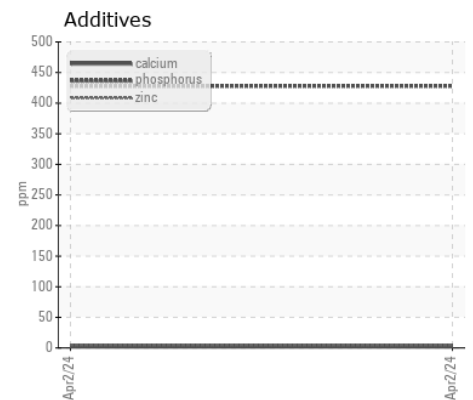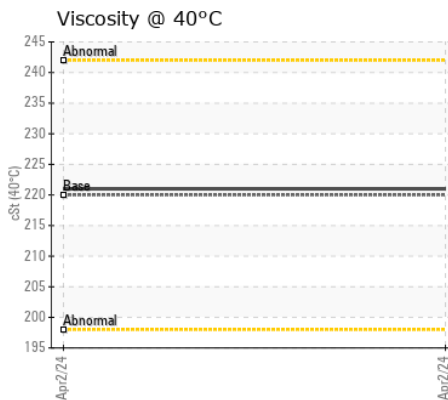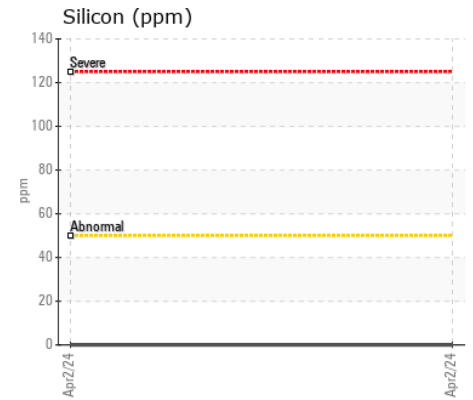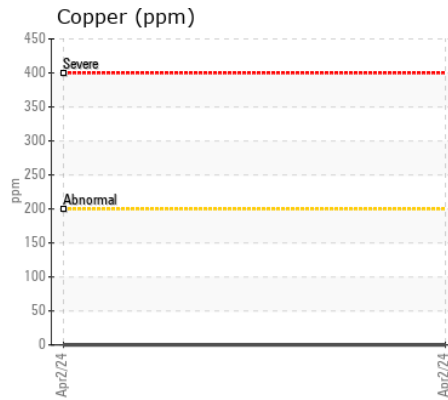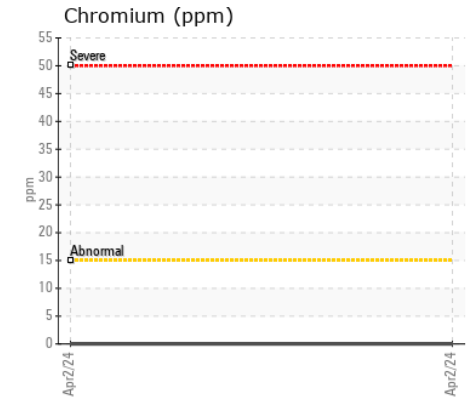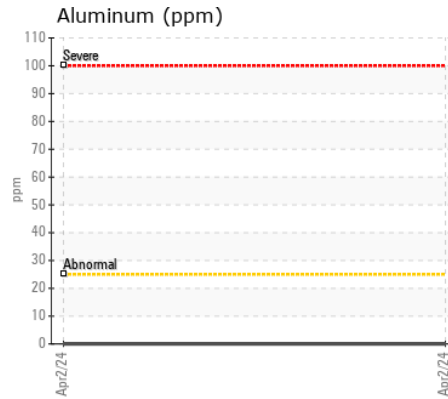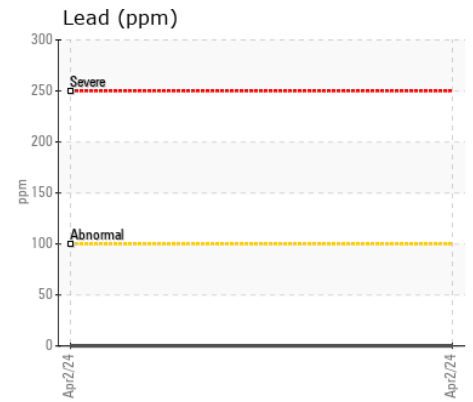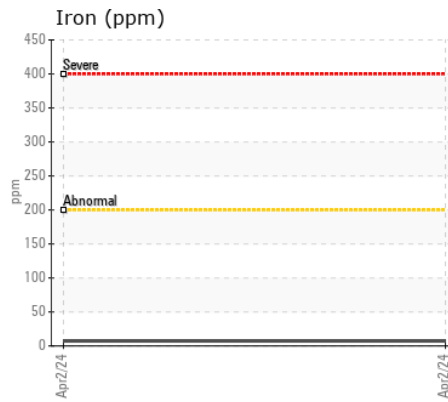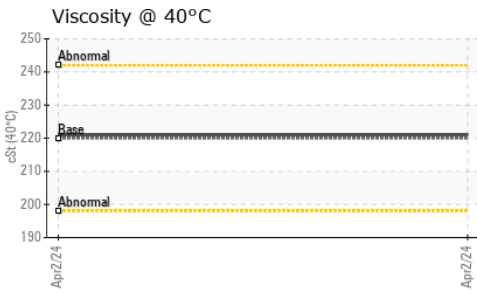

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0922022
Lab Number : 02626790
Unique Number : 5759922
Test Package : MOB 1
Received : 04 Apr 2024
Tested : 04 Apr 2024
Diagnosed : 04 Apr 2024 - Wes Davis

Mount St. Louis Moonstone
 R.R. # 4,, 24 Mount St. Louis Road
 Coldwater, ON
 CA L0K 1E0
 Contact: Andre Huter
 a.huter@mslm.on.ca
 T: (705)835-2112
 F: (705)835-5967

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.