



# OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id  
**100023135 CONVERYOR LIFT TABLE L**  
 Component  
**Gearbox**  
 Fluid  
**SHELL OMALA S4 GX 150 (--- GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0922027	---	---
Sample Date		Client Info		02 Apr 2024	---	---
Machine Age	hrs	Client Info		1245	---	---
Oil Age	hrs	Client Info		1245	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>200	0	---	---
Chromium	ppm	ASTM D5185(m)	>15	0	---	---
Nickel	ppm	ASTM D5185(m)	>15	0	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)		0	---	---
Aluminum	ppm	ASTM D5185(m)	>25	0	---	---
Lead	ppm	ASTM D5185(m)	>100	0	---	---
Copper	ppm	ASTM D5185(m)	>200	0	---	---
Tin	ppm	ASTM D5185(m)	>25	0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---

## CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>50	19	---	---
Potassium	ppm	ASTM D5185(m)	>20	<1	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	VLITE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---

## FLUID CONDITION

Viscosity of sample indicates oil is within ISO 680 range, advise investigate. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		<1	---	---
Boron	ppm	ASTM D5185(m)		2	---	---
Barium	ppm	ASTM D5185(m)		0	---	---
Molybdenum	ppm	ASTM D5185(m)		0	---	---
Manganese	ppm	ASTM D5185(m)		0	---	---
Magnesium	ppm	ASTM D5185(m)		0	---	---
Calcium	ppm	ASTM D5185(m)		2	---	---
Phosphorus	ppm	ASTM D5185(m)		988	---	---
Zinc	ppm	ASTM D5185(m)		1	---	---
Sulfur	ppm	ASTM D5185(m)		154	---	---
Visc @ 40°C	cSt	ASTM D7279(m)		687	---	---

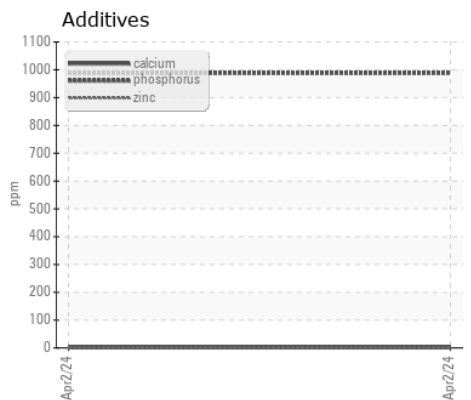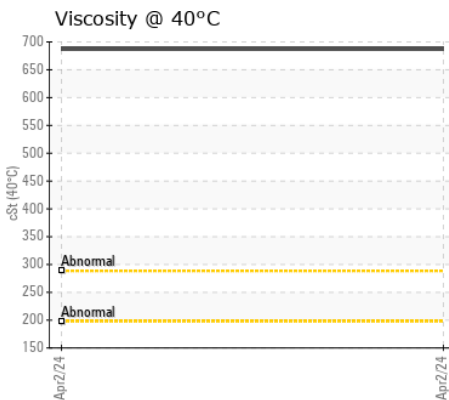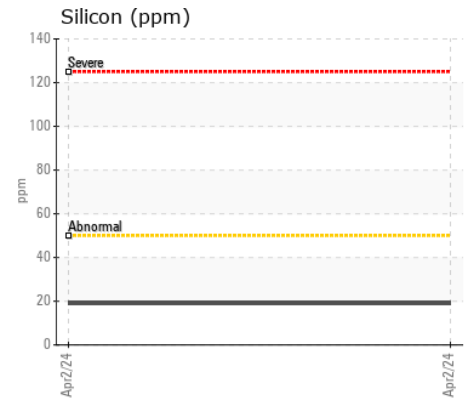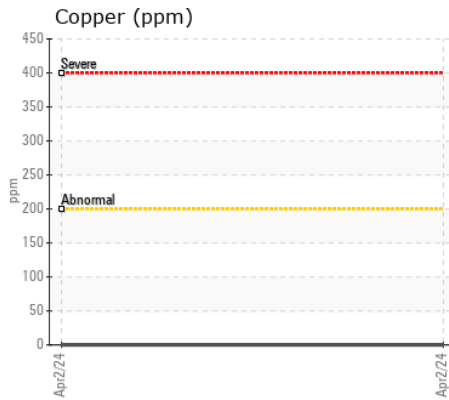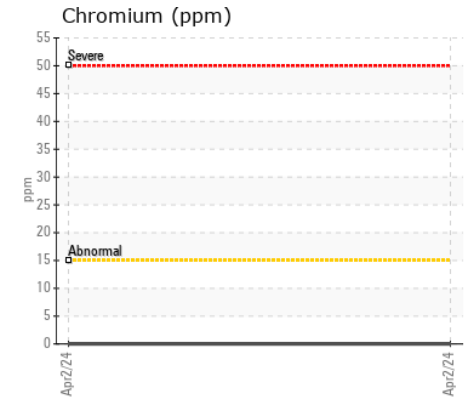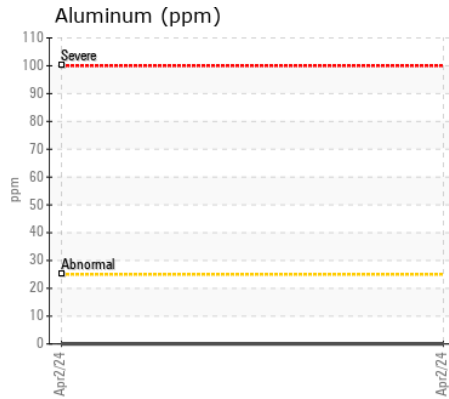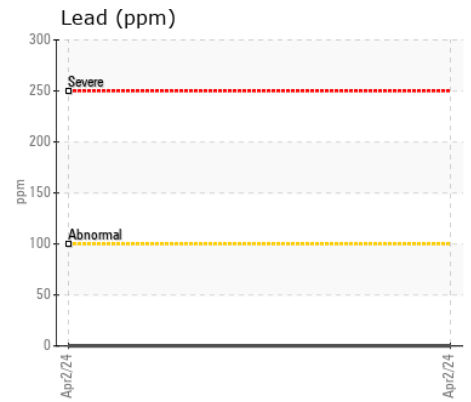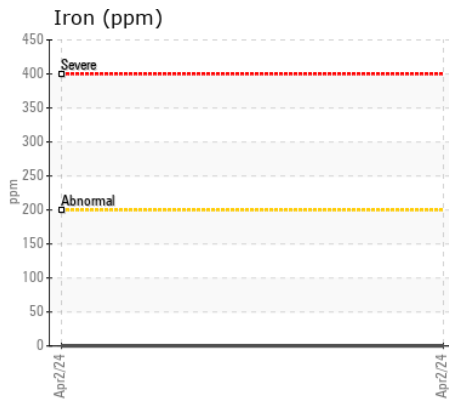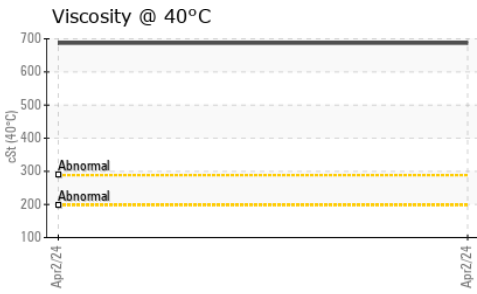

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0922027  
**Lab Number** : 02626793  
**Unique Number** : 5759925  
**Test Package** : MOB 1  
**Received** : 04 Apr 2024  
**Tested** : 04 Apr 2024  
**Diagnosed** : 05 Apr 2024 - Kevin Marson

**Mount St. Louis Moonstone**  
 R.R. # 4,, 24 Mount St. Louis Road  
 Coldwater, ON  
 CA L0K 1E0  
 Contact: Andre Huter  
 a.huter@mslm.on.ca  
 T: (705)835-2112  
 F: (705)835-5967

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.