



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
3000 series
 Machine Id
Navistar 3293
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 10W30 (26 LTR)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0909567	WC0889980	WC0877558
Sample Date		Client Info		25 Mar 2024	16 Feb 2024	08 Nov 2023
Machine Age	mls	Client Info		487387	472522	456319
Oil Age	mls	Client Info		31068	16203	17334
Filter Age	mls	Client Info		31068	16203	17334
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>90	17	30	17
Chromium	ppm	ASTM D5185(m)	>20	<1	<1	<1
Nickel	ppm	ASTM D5185(m)	>2	<1	<1	<1
Titanium	ppm	ASTM D5185(m)	>2	0	0	0
Silver	ppm	ASTM D5185(m)	>2	0	<1	<1
Aluminum	ppm	ASTM D5185(m)	>20	5	11	5
Lead	ppm	ASTM D5185(m)	>40	0	<1	<1
Copper	ppm	ASTM D5185(m)	>330	2	5	4
Tin	ppm	ASTM D5185(m)	>15	0	<1	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	VLITE	---
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	---

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	2	5	4
Potassium	ppm	ASTM D5185(m)	>20	4	13	3
Fuel		WC Method	>3.0	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	ASTM D7844*	>6	0.3	0.6	0.4
Nitration	Abs/cm	ASTM D7624*	>20	9.7	11.8	10.0
Sulfation	Abs/.1mm	ASTM D7415*	>30	20.2	21.1	20.6
Silt	scalar	Visual*	NONE	VLITE	NONE	---
Debris	scalar	Visual*	NONE	VLITE	NONE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		1	2	1
Boron	ppm	ASTM D5185(m)	2	1	1	2
Barium	ppm	ASTM D5185(m)	0	0	0	0
Molybdenum	ppm	ASTM D5185(m)	50	59	60	61
Manganese	ppm	ASTM D5185(m)	0	0	0	0
Magnesium	ppm	ASTM D5185(m)	950	998	975	985
Calcium	ppm	ASTM D5185(m)	1050	1073	1157	1133
Phosphorus	ppm	ASTM D5185(m)	995	1014	1040	1016
Zinc	ppm	ASTM D5185(m)	1180	1216	1233	1241
Sulfur	ppm	ASTM D5185(m)	2600	2558	2770	2578
Oxidation	Abs/.1mm	ASTM D7414*	>25	16.9	18.7	17.6
Visc @ 100°C	cSt	ASTM D7279(m)	12.00	11.8	11.2	11.5

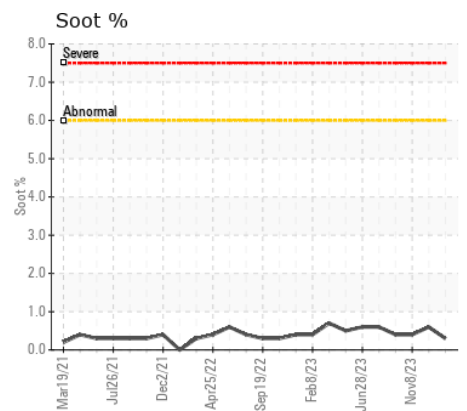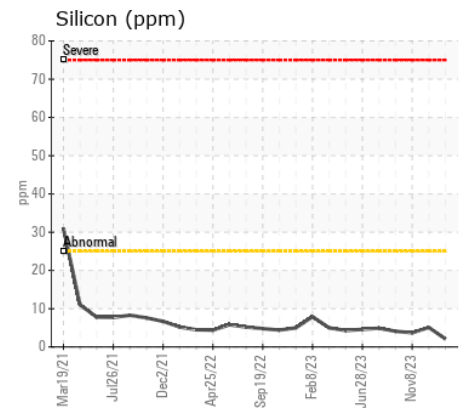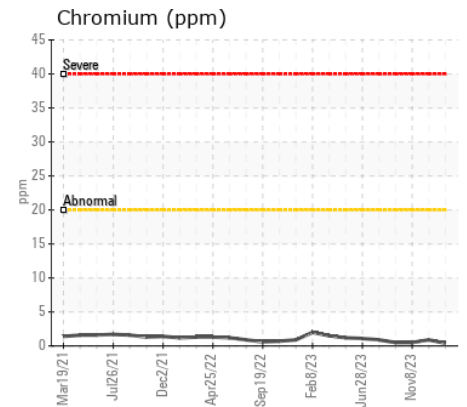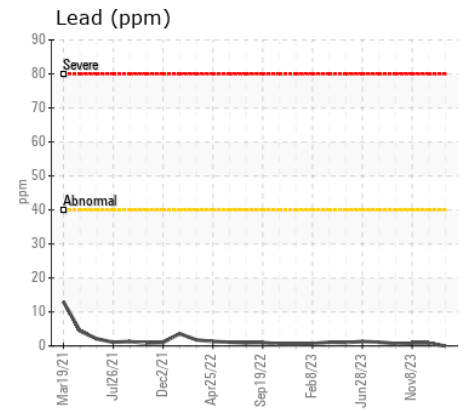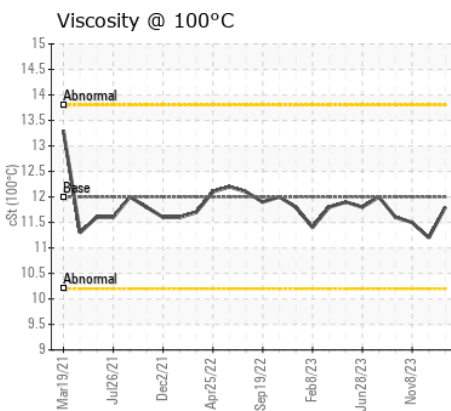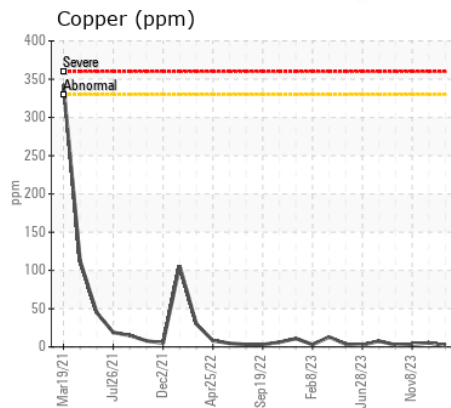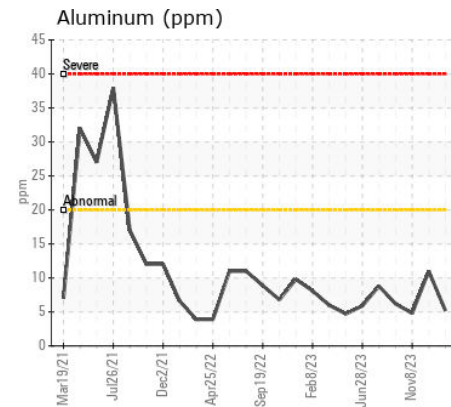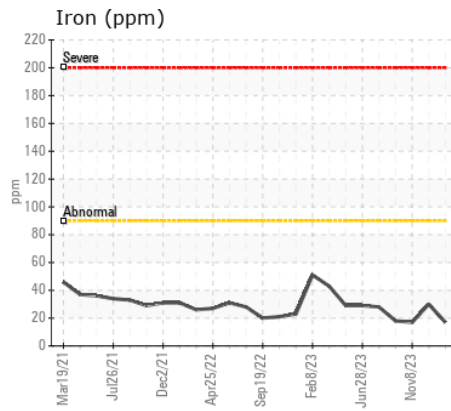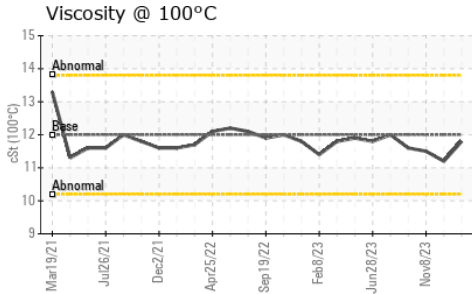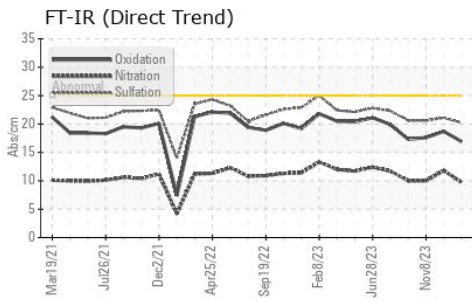

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0909567 **Received** : 05 Apr 2024
Lab Number : 02626936 **Tested** : 05 Apr 2024
Unique Number : 5760068 **Diagnosed** : 05 Apr 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: Visual)

MANITOU LIN TRANSPORT
 1890 DES SOURCES BOULEVARD
 POINTE CLAIRE, QC
 CA H9R 5B1
 Contact: Eric Marcelin
 emarcelin@manitoulintransport.com
 T: (514)694-5111
 F: (514)694-9739

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.