



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
MANITOU MT625 FOR432
Component
Diesel Engine
Fluid
MOBIL 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0914377	WC0899943	WC0910874
Sample Date		Client Info		29 Mar 2024	16 Mar 2024	11 Mar 2024
Machine Age	hrs	Client Info		407	1165	1127
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	N/A	Changed
Filter Changed		Client Info		Changed	N/A	Changed
Sample Status				NORMAL	MARGINAL	SEVERE

WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185(m)	>100	9	3	9
Chromium	ppm	ASTM D5185(m)	>20	<1	0	<1
Nickel	ppm	ASTM D5185(m)	>4	0	0	<1
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)	>3	0	0	0
Aluminum	ppm	ASTM D5185(m)	>20	2	<1	2
Lead	ppm	ASTM D5185(m)	>40	0	0	<1
Copper	ppm	ASTM D5185(m)	>330	16	<1	1
Tin	ppm	ASTM D5185(m)	>15	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	10	5	4
Potassium	ppm	ASTM D5185(m)	>20	3	<1	2
Fuel		WC Method	>5	<1.0	▲ 3.9	▲ 9.1
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	ASTM D7844*	>3	0	0	0
Nitration	Abs/cm	ASTM D7624*	>20	7.4	5.3	8.8
Sulfation	Abs/.1mm	ASTM D7415*	>30	16.4	21.5	22.0
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)	>118	4	2	3
Boron	ppm	ASTM D5185(m)		4	57	28
Barium	ppm	ASTM D5185(m)		4	0	0
Molybdenum	ppm	ASTM D5185(m)		1	37	37
Manganese	ppm	ASTM D5185(m)		1	0	0
Magnesium	ppm	ASTM D5185(m)		9	484	476
Calcium	ppm	ASTM D5185(m)		2411	1631	1601
Phosphorus	ppm	ASTM D5185(m)		853	702	722
Zinc	ppm	ASTM D5185(m)		952	812	826
Sulfur	ppm	ASTM D5185(m)		3414	2040	2079
Oxidation	Abs/.1mm	ASTM D7414*	>25	10.8	19.2	21.9
Visc @ 100°C	cSt	ASTM D7279(m)		11.3	12.7	▲ 11.1

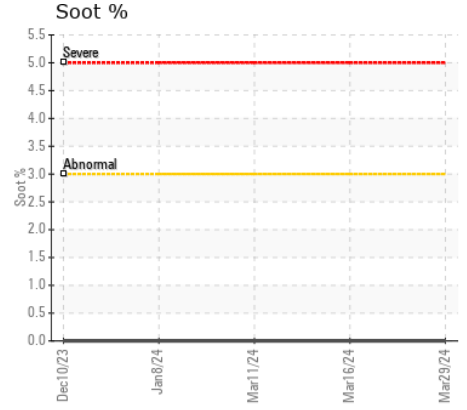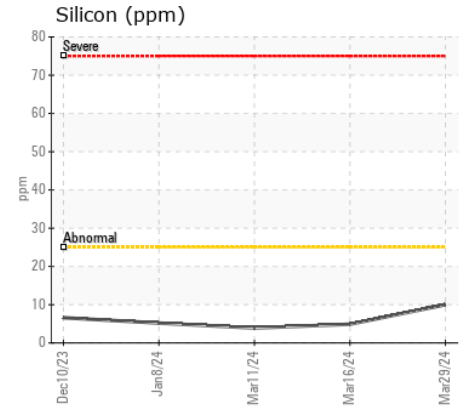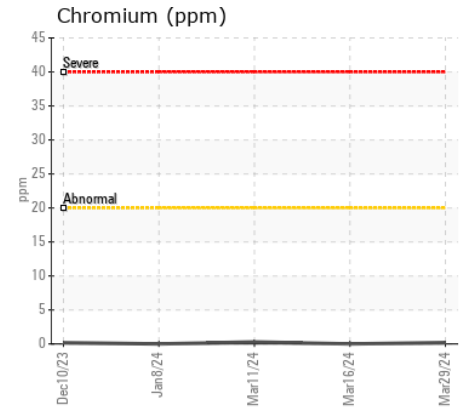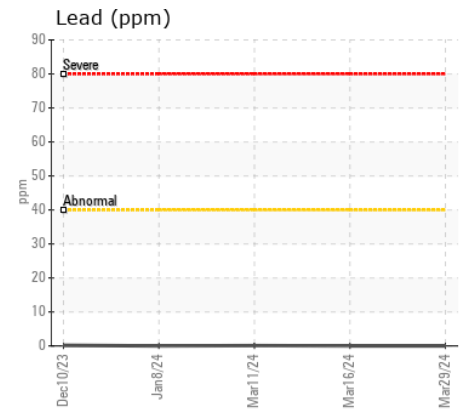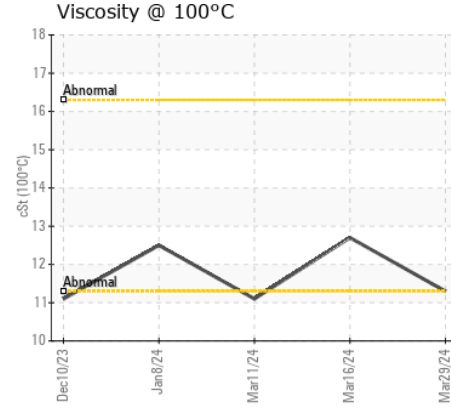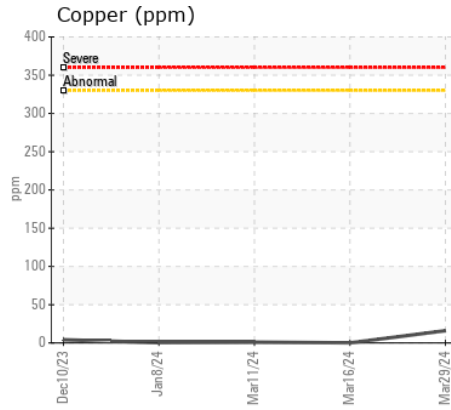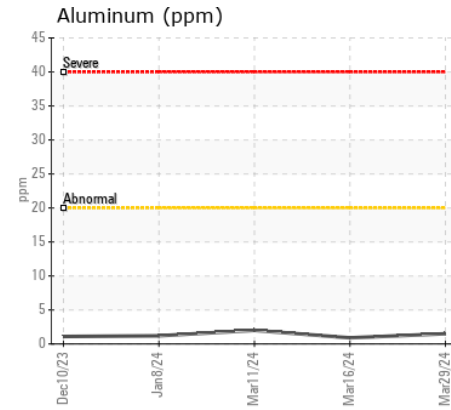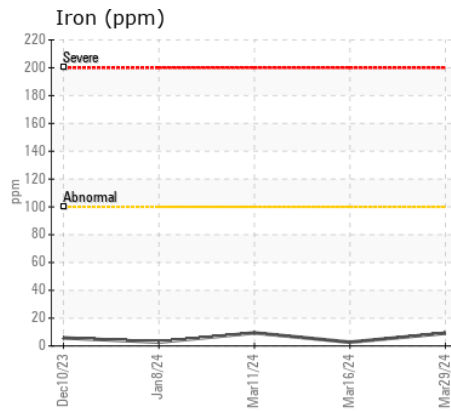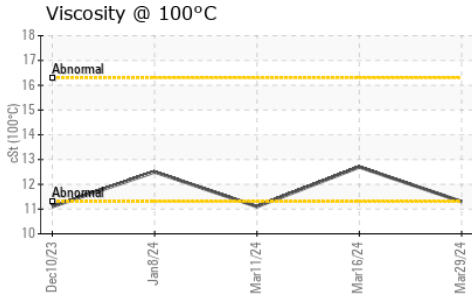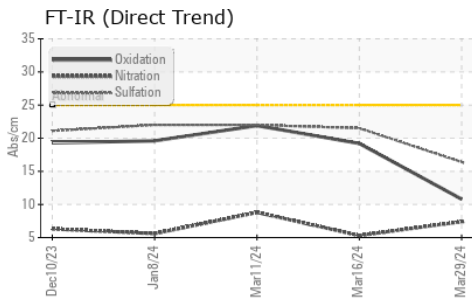

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0914377 **Received** : 05 Apr 2024
Lab Number : 02626955 **Tested** : 05 Apr 2024
Unique Number : 5760087 **Diagnosed** : 05 Apr 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: Visual)

Agnico Eagle Canada
 1350 Government Rd. W, MACASSA COMPLEX
 Kirkland Lake, ON
 CA P2N 3J1
 Contact: Jay Gould
 MacassaMobileUGPlanning@agnicoeagle.com
 T: (705)567-5208
 F: (705)567-5221

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.