



LIEBHERR

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
(346464)
Machine Id
LIEBHERR LH30M 124535-1253
Component
Front Right Wheel Hub
Fluid
GEAR OIL SAE 75W90 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH0286591	LH0269643	LH0224216
Sample Date		Client Info		16 Mar 2024	18 Oct 2023	04 Apr 2022
Machine Age	hrs	Client Info		6121	5046	2025
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>450	20	17	25
Chromium	ppm	ASTM D5185(m)	>4	0	0	<1
Nickel	ppm	ASTM D5185(m)	>2	0	0	<1
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)		0	<1	0
Aluminum	ppm	ASTM D5185(m)	>15	0	0	<1
Lead	ppm	ASTM D5185(m)	>4	0	<1	<1
Copper	ppm	ASTM D5185(m)	>75	3	6	7
Tin	ppm	ASTM D5185(m)		0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	VLITE	LIGHT
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>60	<1	<1	3
Potassium	ppm	ASTM D5185(m)	>20	<1	0	<1
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	Visual*	NONE	VLITE	VLITE	LIGHT
Debris	scalar	Visual*	NONE	VLITE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		3	5	9
Boron	ppm	ASTM D5185(m)	400	300	278	237
Barium	ppm	ASTM D5185(m)	200	1	<1	2
Molybdenum	ppm	ASTM D5185(m)	12	0	0	0
Manganese	ppm	ASTM D5185(m)		0	0	<1
Magnesium	ppm	ASTM D5185(m)	12	1	1	4
Calcium	ppm	ASTM D5185(m)	150	76	142	919
Phosphorus	ppm	ASTM D5185(m)	1650	1198	1182	1257
Zinc	ppm	ASTM D5185(m)	125	35	65	395
Sulfur	ppm	ASTM D5185(m)	22500	20515	20050	16465
Visc @ 40°C	cSt	ASTM D7279(m)	109	102	102	88.2

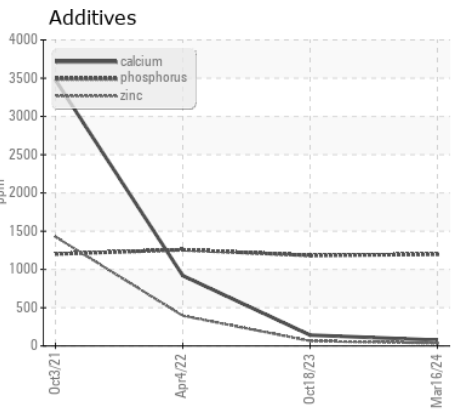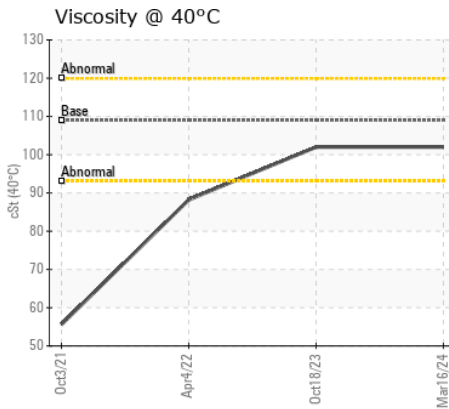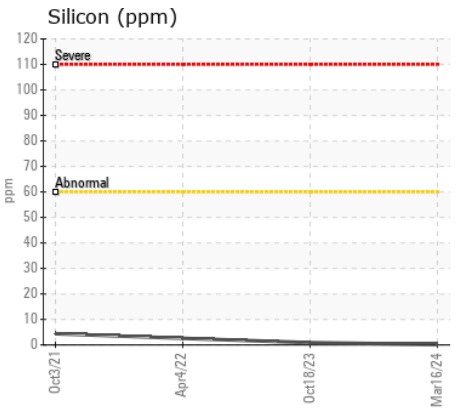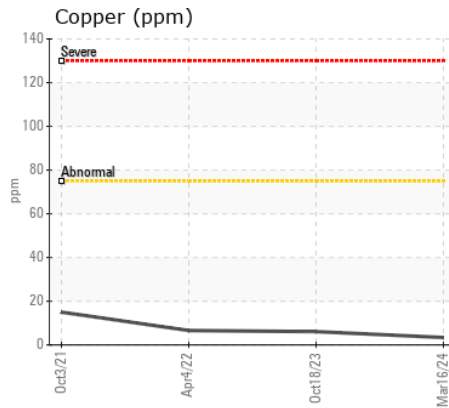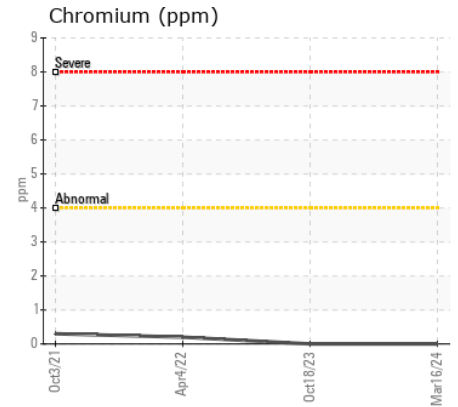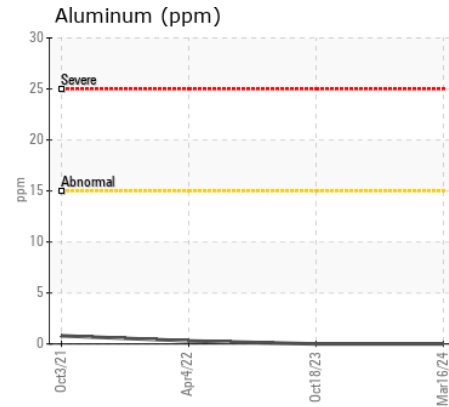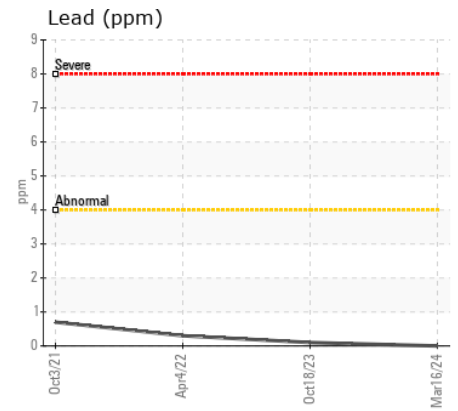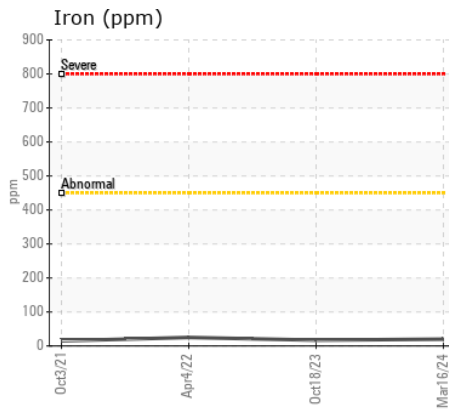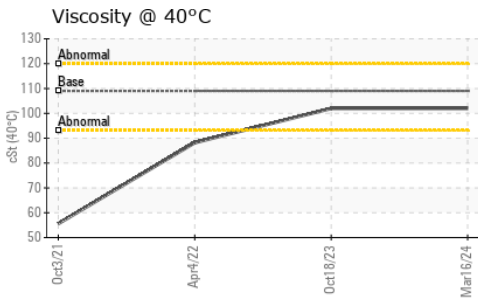

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : LH0286591
Lab Number : 02627087
Unique Number : 5760219
Test Package : MOB 1
Received : 05 Apr 2024
Tested : 05 Apr 2024
Diagnosed : 05 Apr 2024 - Wes Davis

JOHN ROSS & SONS LTD.
 85 GLASSY AVENUE
 TRURO, NS
 CA B2N 6Z1
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
F: