



OIL ANALYSIS REPORT

WEAR	ABNORMAL
CONTAMINANTS	NORMAL
OIL CONDITION	ABNORMAL




Machine Id
E-COAT OVEN DRIVE
 Component
Gearbox
 Fluid
SHELL OMALA 150 (--- GAL)

RECOMMENDATION

We recommend that you drain the oil from the component if this has not already been done. Confirm the source of the lubricant being utilized for top-up/fill. We recommend an early resample to monitor this condition. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

WEAR

Wear particle analysis indicates that the ferrous rolling, ferrous rubbing and ferrous corrosive particles are abnormal.

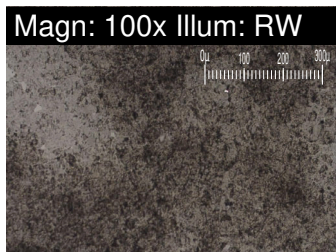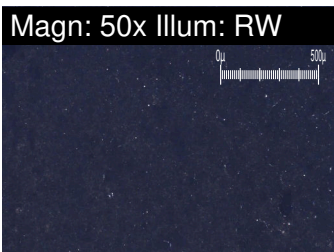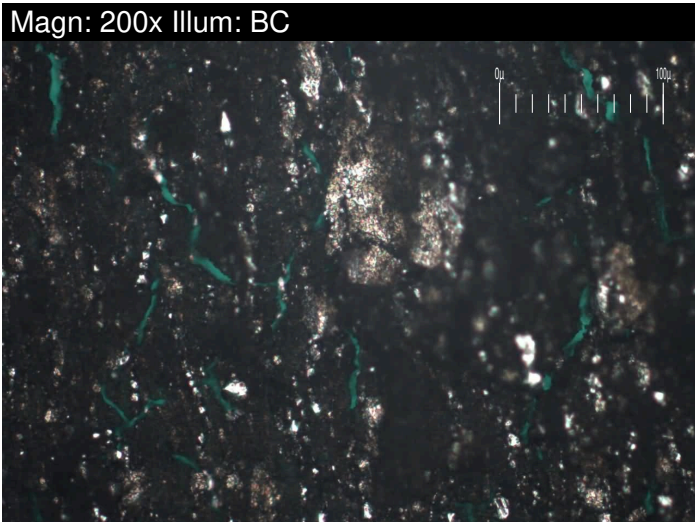

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC	CB0029722	CB0028682
Sample Date		Client Info		23 Mar 2024	24 Mar 2021	11 Mar 2019
Machine Age	days	Client Info		0	0	0
Oil Age	days	Client Info		0	0	0
Filter Age	days	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				ABNORMAL	NORMAL	NORMAL
PQ		ASTM D8184*		34	0	22
Iron	ppm	ASTM D5185(m)	>200	81	9	10
Chromium	ppm	ASTM D5185(m)	>15	<1	0	0
Nickel	ppm	ASTM D5185(m)	>15	0	<1	<1
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)		0	<1	0
Aluminum	ppm	ASTM D5185(m)	>25	1	<1	<1
Lead	ppm	ASTM D5185(m)	>100	<1	<1	1
Copper	ppm	ASTM D5185(m)	>200	24	18	19
Tin	ppm	ASTM D5185(m)	>25	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Large Particles		DR-Ferr*		24.8	102.9	57.3
Small Particles		DR-Ferr*		12.2	57.3	36.6
Total Particles		DR-Ferr*	>---	37	160.2	93.9
Large Particles Percentage	%	DR-Ferr*		34.1	28.5	22
Severity Index		DR-Ferr*		312	4692	1186
Ferrous Rubbing	Scale 0-10	ASTM D7684*		1	1	2
Ferrous Sliding	Scale 0-10	ASTM D7684*				
Ferrous Cutting	Scale 0-10	ASTM D7684*				
Ferrous Rolling	Scale 0-10	ASTM D7684*		4		1
Ferrous Break-in	Scale 0-10	ASTM D7684*				
Ferrous Spheres	Scale 0-10	ASTM D7684*				
Ferrous Black Oxides	Scale 0-10	ASTM D7684*		1		
Ferrous Red Oxides	Scale 0-10	ASTM D7684*				
Ferrous Corrosive	Scale 0-10	ASTM D7684*		3		
Ferrous Other	Scale 0-10	ASTM D7684*				
Nonferrous Rubbing	Scale 0-10	ASTM D7684*				
Nonferrous Sliding	Scale 0-10	ASTM D7684*				
Nonferrous Cutting	Scale 0-10	ASTM D7684*				
Nonferrous Rolling	Scale 0-10	ASTM D7684*				
Nonferrous Other	Scale 0-10	ASTM D7684*				

CONTAMINANTS

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185(m)	>50	14	9	12
Potassium	ppm	ASTM D5185(m)	>20	2	<1	0
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	Visual*	NONE	NONE	LIGHT	NONE
Debris	scalar	Visual*	NONE	VLITE	NONE	VLITE
Sand/Dirt	scalar	Visual*	NONE	VLITE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG
Carbonaceous Material	Scale 0-10	ASTM D7684*				
Sand/Dirt	Scale 0-10	ASTM D7684*		1	1	1
Fibres	Scale 0-10	ASTM D7684*				
Spheres	Scale 0-10	ASTM D7684*				
Other	Scale 0-10	ASTM D7684*		2		2

OIL CONDITION


The AN level is above the recommended limit. Viscosity of sample indicates oil is within ISO 320 range, advise investigate. This plus the additive levels indicates that this is not the same brand, or type of oil as reported. The oil is no longer serviceable as a result of the abnormal and/or severe wear.

Sodium	ppm	ASTM D5185(m)		4	<1	0
Boron	ppm	ASTM D5185(m)	6.2	2	2	2
Barium	ppm	ASTM D5185(m)	0.0	3	<1	<1
Molybdenum	ppm	ASTM D5185(m)	0	0	0	<1
Manganese	ppm	ASTM D5185(m)		<1	<1	1
Magnesium	ppm	ASTM D5185(m)	0	<1	<1	<1
Calcium	ppm	ASTM D5185(m)	0.0	2	1	2
Phosphorus	ppm	ASTM D5185(m)	512	341	300	302
Zinc	ppm	ASTM D5185(m)	3.8	16	14	21
Sulfur	ppm	ASTM D5185(m)	8167	4789	7040	7426
Acid Number (AN)	mg KOH/g	ASTM D974*		▲ 2.09	0.52	0.468
Visc @ 40°C	cSt	ASTM D7279(m)	150	▲ 354	148	147
Lubricant Degradation	Scale 0-10	ASTM D7684*				


Ferrous Alloys

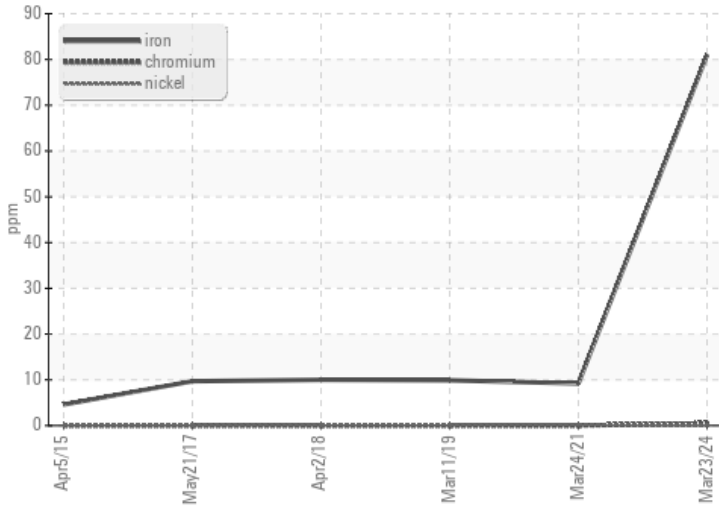


PQ

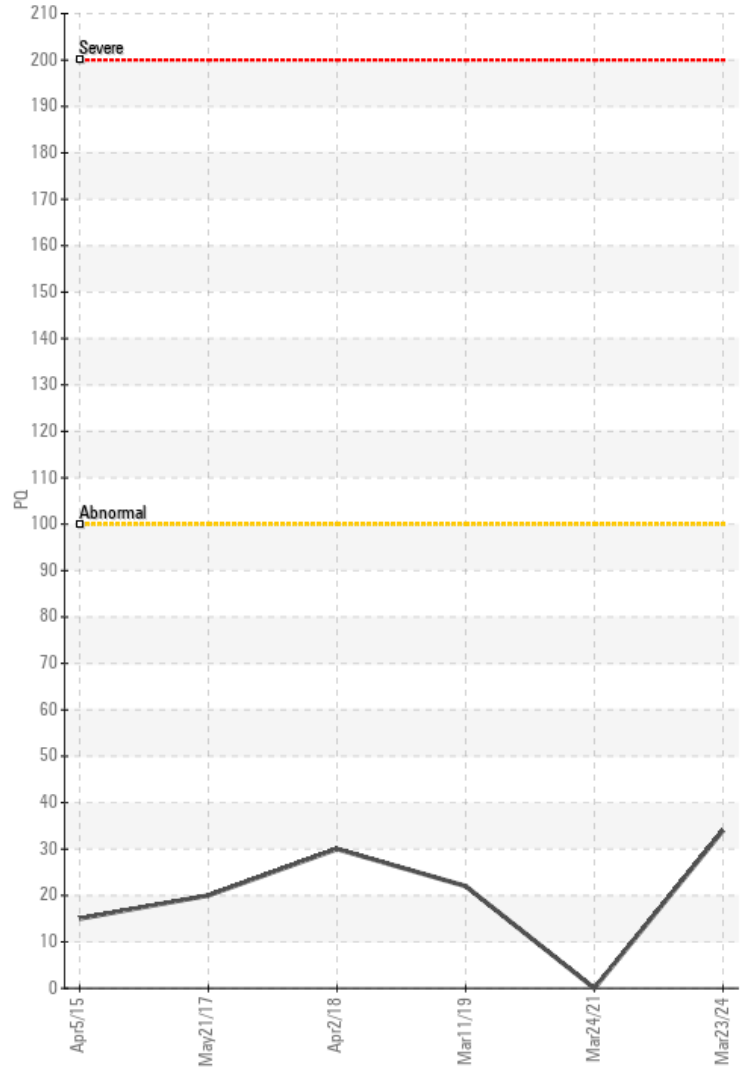


Non-ferrous Metals

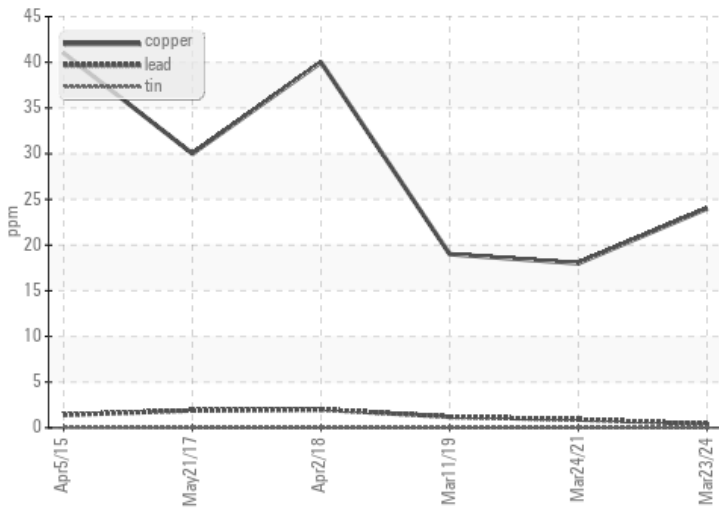

Viscosity @ 40°C

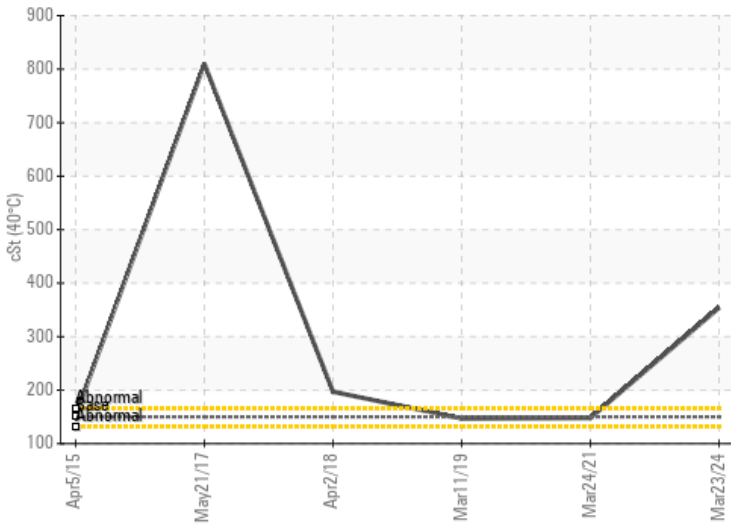

Acid Number

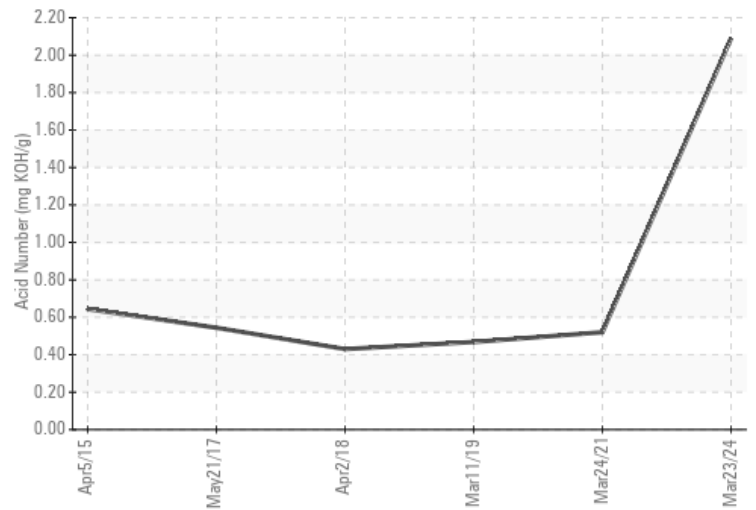

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC
Lab Number : 02627130
Unique Number : 5760262
Test Package : IND 3 (Additional Tests: TAN Man)
Received : 05 Apr 2024
Tested : 11 Apr 2024
Diagnosed : 11 Apr 2024 - Kevin Marson

TOYOTA MOTOR MANUFACT.
 1055 FOUNTAIN STREET N.
 CAMBRIDGE, ON
 CA N3H 5K2
 Contact: mike clappison
 mike.clappison@toyota.com
 T: (519)212-5023
 F: (519)653-9638

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

This page left intentionally blank