Honeywell

WEAR NORMAL CONTAMINATION NORMAL FLUID CONDITION NORMAL

OIL ANALYSIS REPORT

(BWQ) SKYCARE [53149] [BWQ] FAIRCHILD SA226 P-54188 (S/N TC-379)

Right Jet Turbine

Area

EASTMAN TURBO OIL 2380 (--- GAL)

| | | | | | ~ | | |
|----------------|------------------|----------|---------------|-----------|-------------|-------------|-------------|
| RECOMMENDATION | Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
| | Sample Number | | Client Info | | GT57696 | GT57707 | GT57711 |
| | Sample Date | | Client Info | | 04 Apr 2024 | 20 Mar 2024 | 06 Mar 2024 |
| | Machine Age | hrs | Client Info | | 0 | 0 | 0 |
| | Oil Age | hrs | Client Info | | 585 | 517 | 452 |
| | Filter Age | hrs | Client Info | | 68 | 65 | 66 |
| | Oil Changed | | Client Info | | N/A | N/A | N/A |
| | Filter Changed | | Client Info | | N/A | N/A | N/A |
| | Sample Status | | | | | NORMAL | NORMAL |
| | Iron | ppm | ASTM D5185(m) | >8 | 0 | 0 | 0 |
| | Chromium | ppm | ASTM D5185(m) | >2 | 0 | 0 | 0 |
| | Nickel | ppm | ASTM D5185(m) | >2 | 0 | 0 | 0 |
| | Silver | ppm | ASTM D5185(m) | >2 | 0 | 0 | 0 |
| | Aluminum | ppm | ASTM D5185(m) | >2 | <1 | <1 | <1 |
| | Lead | ppm | ASTM D5185(m) | >3 | <1 | 0 | <1 |
| | Copper | ppm | ASTM D5185(m) | >3 | 0 | 0 | 0 |
| | Water | | WC Method | >0.1 | NEG | NEG | NEG |
| | Magnesium | ppm | ASTM D5185(m) | 0 | 0 | 0 | 0 |
| | Acid Number (AN) | mg KOH/g | ASTM D974* | 0.43 | 0.43 | 0.41 | 0.46 |


Visc @ 40°C

cSt

ASTM D7279(m) 24.2

24.3

24.6

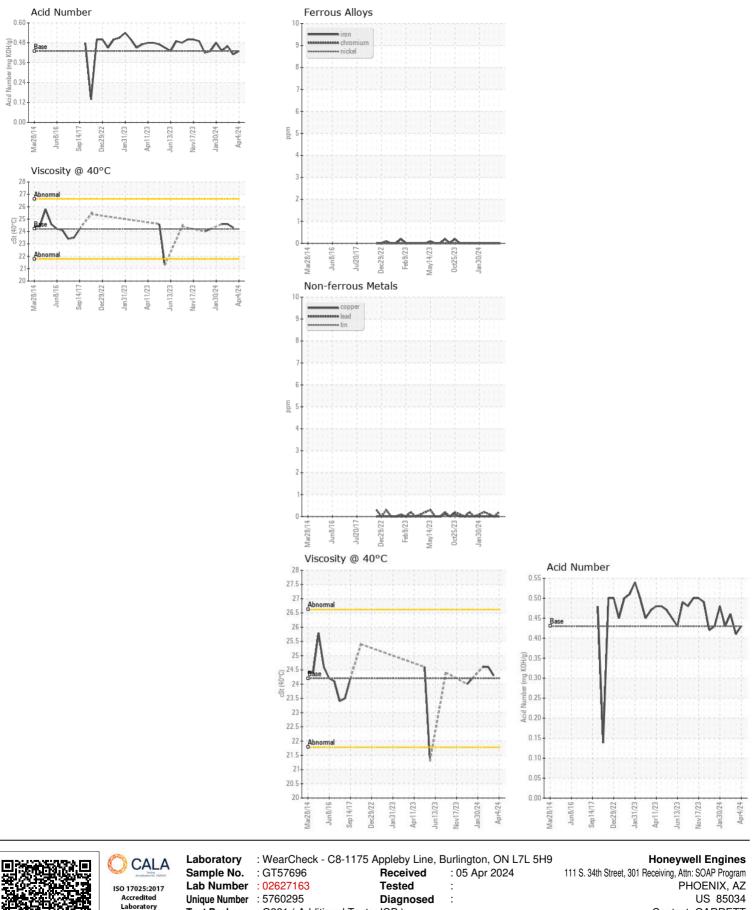

Laboratory Test Package : G331 (Additional Tests: ICP) To discuss this sample report, contact Customer Service at 1-800-268-2131. Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.

T: F: (602)365-2676

Contact: GARRETT

Contact/Location: GARRETT ? - HONPHO Page 2 of 2