



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
GFL218
Machine Id
833035
Component
Natural Gas Engine
Fluid
NOT GIVEN (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0116367	GFL0107854	---
Sample Date		Client Info		03 Apr 2024	26 Dec 2023	---
Machine Age	hrs	Client Info		14332	9386	---
Oil Age	hrs	Client Info		0	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>50	7	11	---
Chromium	ppm	ASTM D5185(m)	>4	0	<1	---
Nickel	ppm	ASTM D5185(m)	>2	<1	<1	---
Titanium	ppm	ASTM D5185(m)		0	0	---
Silver	ppm	ASTM D5185(m)	>3	0	0	---
Aluminum	ppm	ASTM D5185(m)	>9	1	2	---
Lead	ppm	ASTM D5185(m)	>30	0	<1	---
Copper	ppm	ASTM D5185(m)	>35	1	3	---
Tin	ppm	ASTM D5185(m)	>4	0	<1	---
Vanadium	ppm	ASTM D5185(m)		0	0	---

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>+100	3	7	---
Potassium	ppm	ASTM D5185(m)	>20	<1	<1	---
Water		WC Method	>0.1	NEG	NEG	---
Soot %	%	ASTM D7844*		0	0	---
Nitration	Abs/cm	ASTM D7624*	>20	10.9	11.2	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	22.0	21.2	---
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		7	6	---
Boron	ppm	ASTM D5185(m)		6	8	---
Barium	ppm	ASTM D5185(m)		0	<1	---
Molybdenum	ppm	ASTM D5185(m)		51	54	---
Manganese	ppm	ASTM D5185(m)		0	1	---
Magnesium	ppm	ASTM D5185(m)		554	514	---
Calcium	ppm	ASTM D5185(m)		1492	1508	---
Phosphorus	ppm	ASTM D5185(m)		630	643	---
Zinc	ppm	ASTM D5185(m)		904	847	---
Sulfur	ppm	ASTM D5185(m)		1945	2065	---
Oxidation	Abs/.1mm	ASTM D7414*	>25	17.9	18.1	---
Visc @ 100°C	cSt	ASTM D7279(m)		14.5	14.6	---

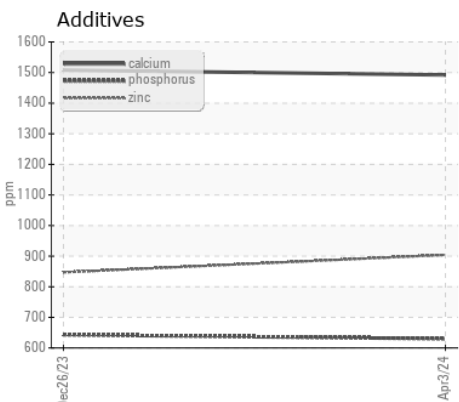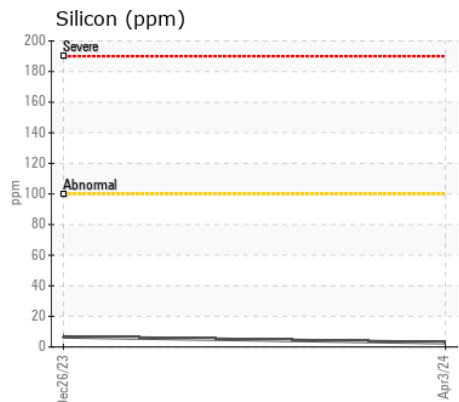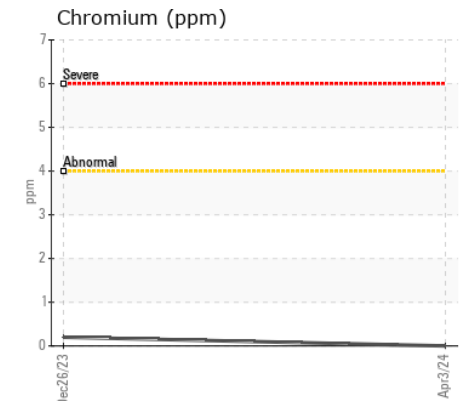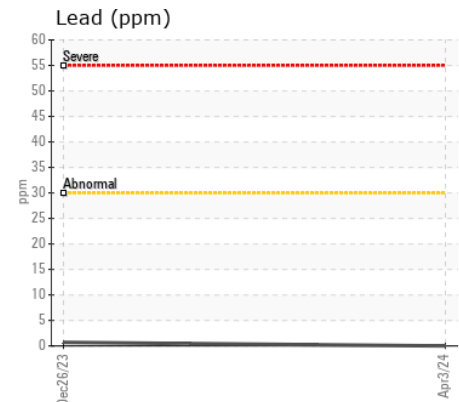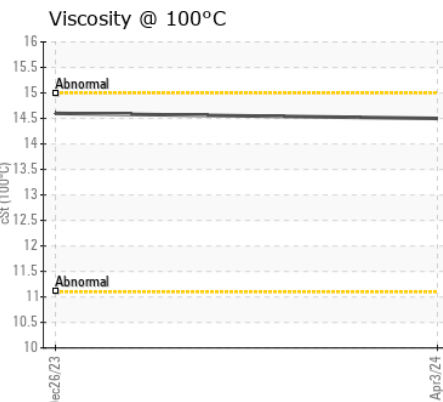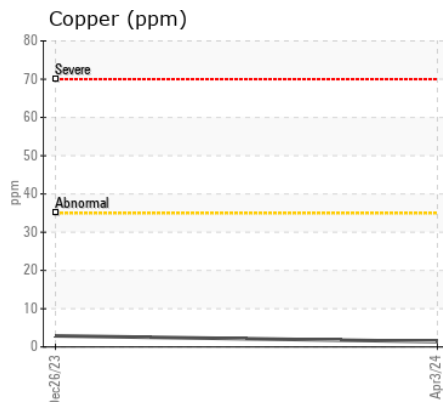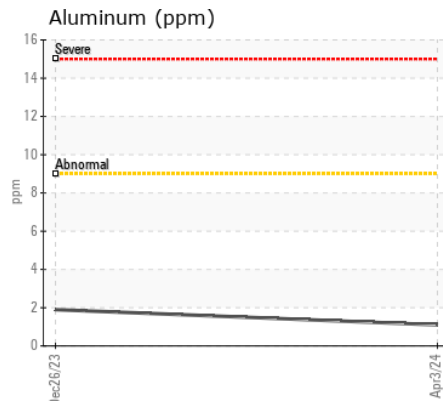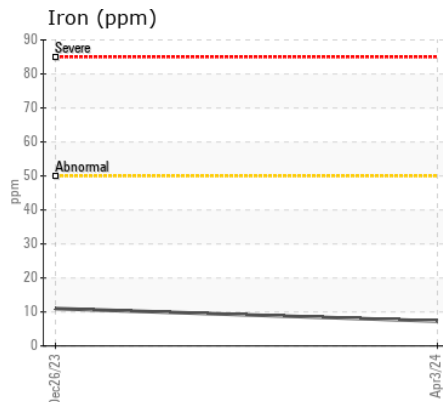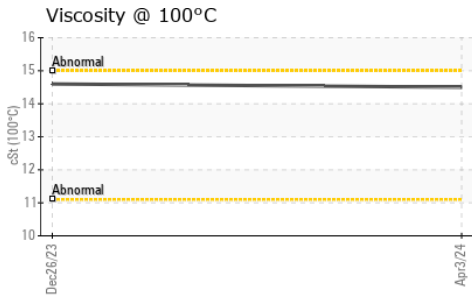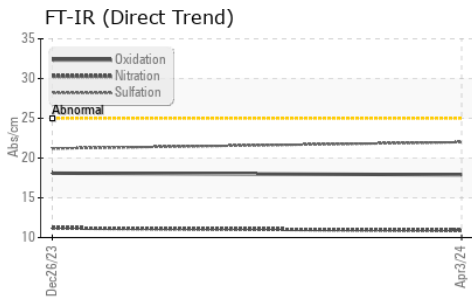

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0116367
Lab Number : 02627254
Unique Number : 5760386
Test Package : MOB 1

GFL Environmental - 225 - COT(D2)
 20 Brydon Drive
 Etobicoke, ON
 CA M9W 5R6
 Contact: Rick Philip
 rphilip@gflenv.com
 T: (416)745-8080
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.