



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**INTERNATIONAL 821067**

Component  
**Transmission (Auto)**

Fluid  
**PETRO CANADA TRAXON E SYNTHETIC CD-50 (--- GAL)**

**RECOMMENDATION**

Confirmez la source du lubrifiant utilisé pour l'appoint/remplissage.  
Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>GFL0113463</b>	PC0062233	---
Sample Date		Client Info		<b>20 Mar 2024</b>	14 Mar 2023	---
Machine Age	hrs	Client Info		<b>18507</b>	17659	---
Oil Age	hrs	Client Info		<b>848</b>	0	---
Filter Age	hrs	Client Info		<b>848</b>	0	---
Oil Changed		Client Info		<b>Not Changed</b>	N/A	---
Filter Changed		Client Info		<b>Changed</b>	N/A	---
Sample Status				<b>NORMAL</b>	ABNORMAL	---

**WEAR**

Les taux d'usure de tous les composants sont normaux.

Iron	ppm	ASTM D5185(m)	>160	<b>46</b>	33	---
Chromium	ppm	ASTM D5185(m)	>5	<b>0</b>	0	---
Nickel	ppm	ASTM D5185(m)	>5	<b>0</b>	<1	---
Titanium	ppm	ASTM D5185(m)		<b>0</b>	<1	---
Silver	ppm	ASTM D5185(m)	>5	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185(m)	>50	<b>18</b>	15	---
Lead	ppm	ASTM D5185(m)	>50	<b>7</b>	7	---
Copper	ppm	ASTM D5185(m)	>225	<b>7</b>	5	---
Tin	ppm	ASTM D5185(m)	>10	<b>0</b>	<1	---
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	---
White Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	---

**CONTAMINATION**











Il n'y a aucun indice de contamination dans le fluide.

Silicon	ppm	ASTM D5185(m)	>20	<b>6</b>	8	---
Potassium	ppm	ASTM D5185(m)	>20	<b>1</b>	<1	---
Water		WC Method	>0.1	<b>NEG</b>	NEG	---
Silt	scalar	Visual*	NONE	<b>NONE</b>	NONE	---
Debris	scalar	Visual*	NONE	<b>VLITE</b>	NONE	---
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	Visual*	NORML	<b>NORML</b>	NORML	---
Odor	scalar	Visual*	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	Visual*	>0.1	<b>NEG</b>	NEG	---

**FLUID CONDITION**

Les niveaux d'additifs indiquent l'ajout d'une autre marque ou d'un autre type d'huile. L'état de le fluide est acceptable pour la durée de service.

Sodium	ppm	ASTM D5185(m)		<b>15</b>	15	---
Boron	ppm	ASTM D5185(m)	1	<b>72</b>	79	---
Barium	ppm	ASTM D5185(m)	1	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185(m)		<b>0</b>	<1	---
Manganese	ppm	ASTM D5185(m)		<b>0</b>	<1	---
Magnesium	ppm	ASTM D5185(m)	1	<b>1</b>	<1	---
Calcium	ppm	ASTM D5185(m)	40	<b>12</b>	11	---
Phosphorus	ppm	ASTM D5185(m)	1072	<b>212</b>	238	---
Zinc	ppm	ASTM D5185(m)	4	<b>15</b>	13	---
Sulfur	ppm	ASTM D5185(m)	439	<b>2053</b>	2238	---
Visc @ 40°C	cSt	ASTM D7279(m)	132	<b>33.8</b>	34.5	---

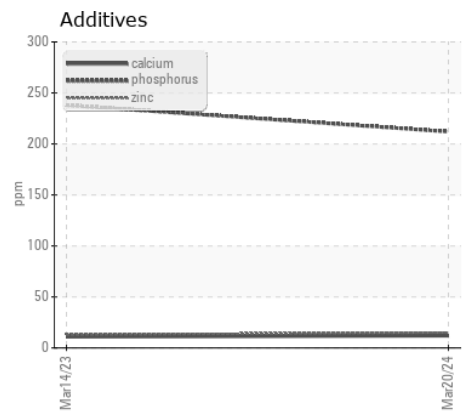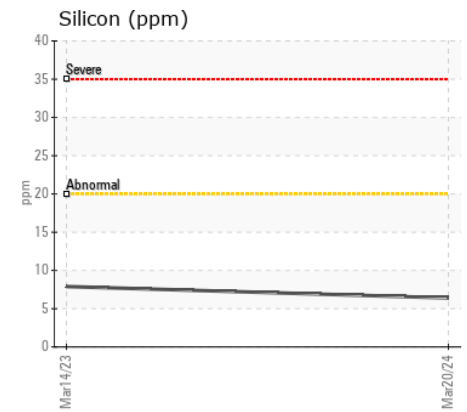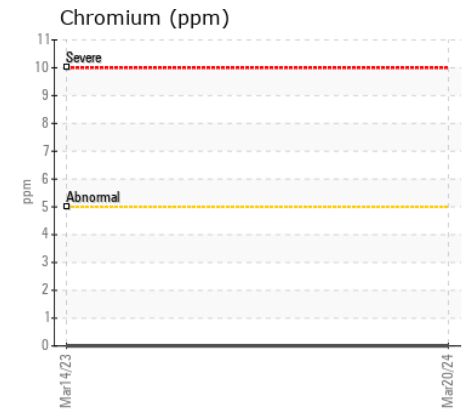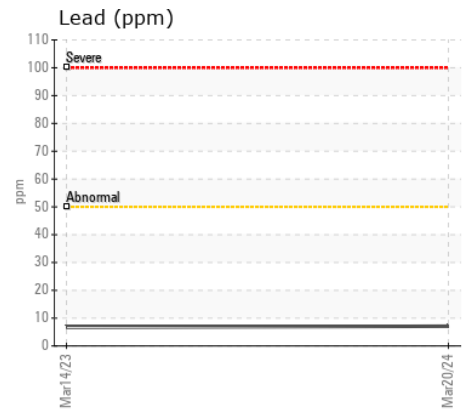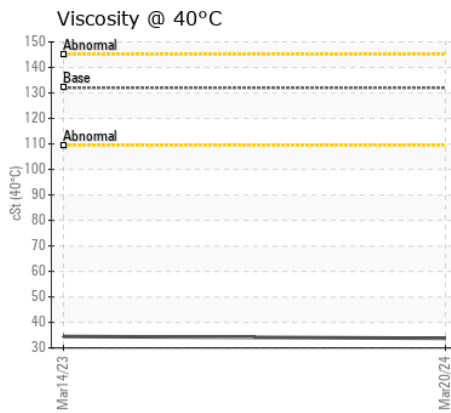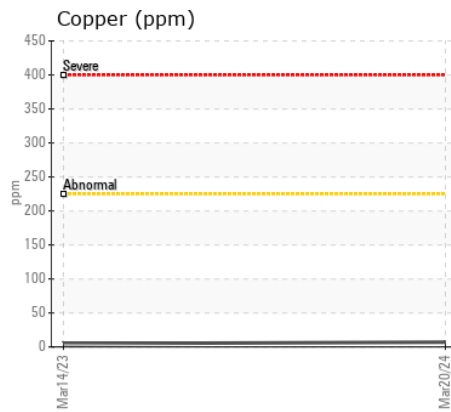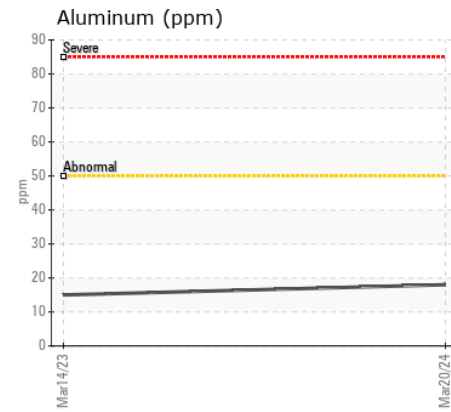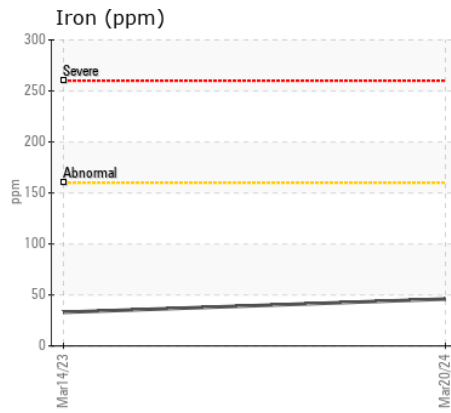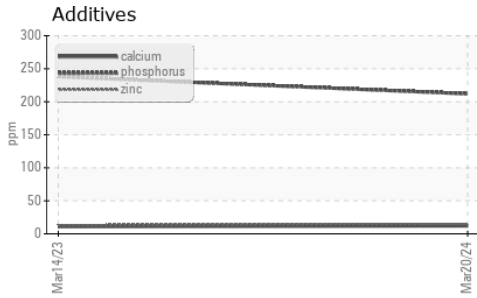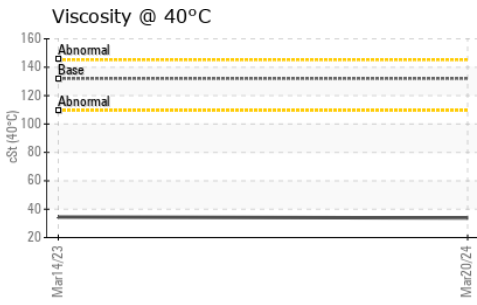

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : GFL0113463 **Received** : 08 Apr 2024  
**Lab Number** : 02627405 **Tested** : 09 Apr 2024  
**Unique Number** : 5760537 **Diagnosed** : 09 Apr 2024 - Wes Davis  
**Test Package** : MOB 1

**GFL Environmental 791MAT - Matane**  
 29 rue Brilliant  
 Matane, QC  
 CA G4W 0J7  
 Contact: B Berube  
 bberube@matrec.ca

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

T:  
F: