



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
NOVA BUS 177
 Component
Rear Transmission (Auto)
 Fluid
CASTROL TRANSYND (24 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0889064	WC0816373	WC0816462
Sample Date		Client Info		02 Apr 2024	25 Sep 2023	05 Jun 2023
Machine Age	kms	Client Info		0	0	0
Oil Age	kms	Client Info		19263	10103	46250
Filter Age	kms	Client Info		19263	10103	46250
Oil Changed		Client Info		Not Changd	Not Changd	Not Changd
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	ABNORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>230	56	59	97
Chromium	ppm	ASTM D5185(m)	>2	0	0	0
Nickel	ppm	ASTM D5185(m)	>5	0	0	<1
Titanium	ppm	ASTM D5185(m)	>2	0	0	0
Silver	ppm	ASTM D5185(m)	>5	0	<1	0
Aluminum	ppm	ASTM D5185(m)	>65	38	41	▲ 82
Lead	ppm	ASTM D5185(m)	>55	1	2	4
Copper	ppm	ASTM D5185(m)	>85	8	10	18
Tin	ppm	ASTM D5185(m)	>5	0	<1	1
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE

CONTAMINATION












There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185(m)	>20	8	8	15
Potassium	ppm	ASTM D5185(m)	>20	1	0	1
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	NEG

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the fluid is suitable for further service.

Sodium	ppm	ASTM D5185(m)		3	3	5
Boron	ppm	ASTM D5185(m)	150	72	69	81
Barium	ppm	ASTM D5185(m)	0	0	<1	0
Molybdenum	ppm	ASTM D5185(m)	0	1	0	<1
Manganese	ppm	ASTM D5185(m)		0	0	<1
Magnesium	ppm	ASTM D5185(m)	0	<1	<1	<1
Calcium	ppm	ASTM D5185(m)	40	127	119	131
Phosphorus	ppm	ASTM D5185(m)	320	222	220	279
Zinc	ppm	ASTM D5185(m)	5	5	4	6
Sulfur	ppm	ASTM D5185(m)	1050	1456	1446	1604
Acid Number (AN)	mg KOH/g	ASTM D974*	1.0	1.10	1.28	1.27
Visc @ 40°C	cSt	ASTM D7279(m)	38.9	33.2	33.5	33.4
Visc @ 100°C	cSt	ASTM D7279(m)	7.3	6.6	6.6	6.7
Viscosity Index (VI)	Scale	ASTM D2270*	168	158	156	162

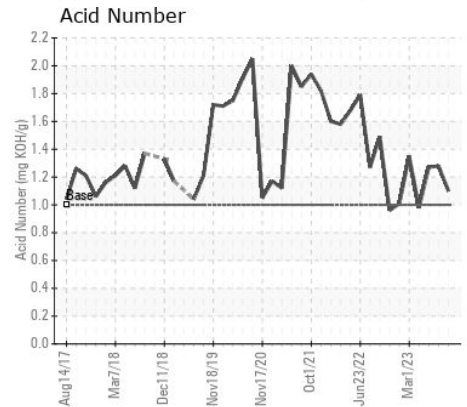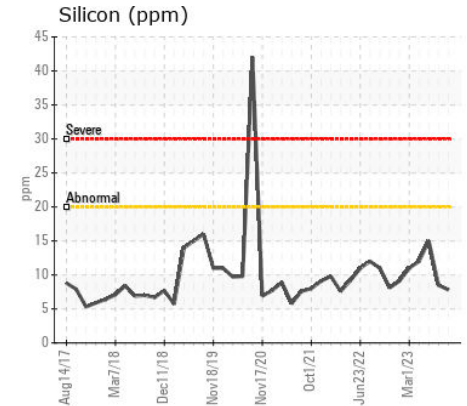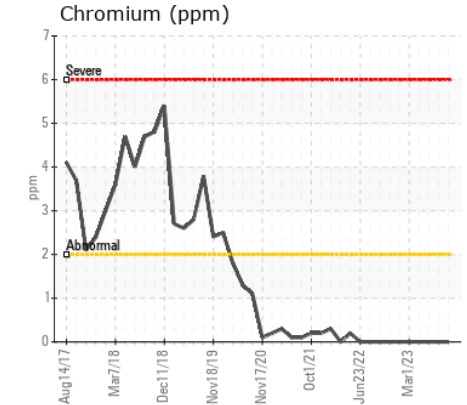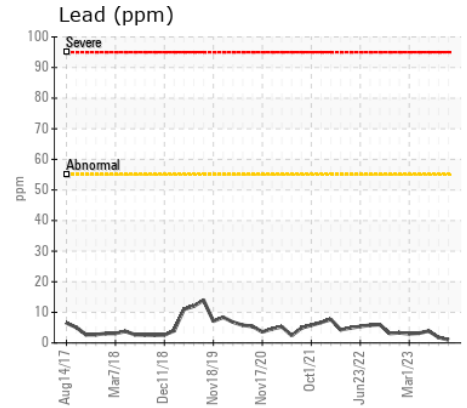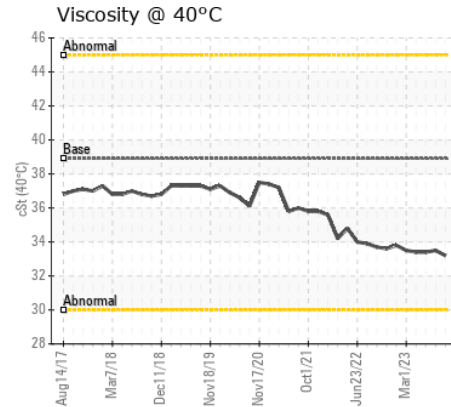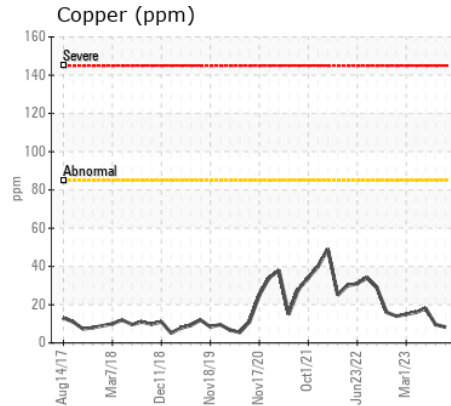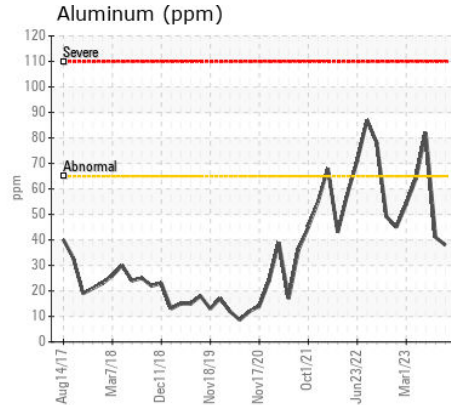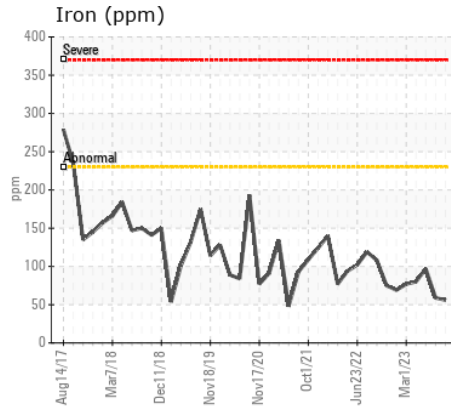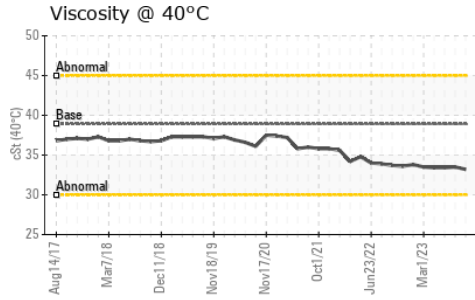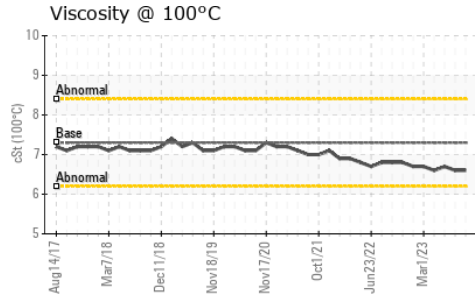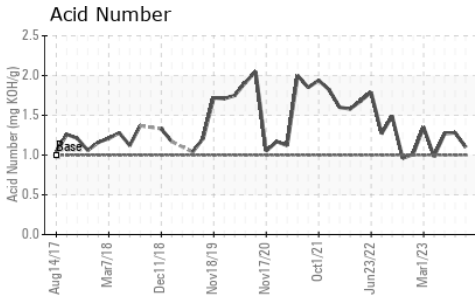

ISO 17025:2017
Accredited
Laboratory

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0889064
Lab Number : 02627420
Unique Number : 5760552
Test Package : MOB 2 (Additional Tests: KV100, TAN Man, VI)

Received : 08 Apr 2024
Tested : 09 Apr 2024
Diagnosed : 09 Apr 2024 - Wes Davis

CITY OF THUNDER BAY
 AUTO MAINTENANCE STORES, 570 FORT WILLIAM ROAD
 THUNDER BAY, ON
 CA P7B 2Z8
 Contact: Sean Malcolm
 sean.malcolm@thunderbay.ca
 T: (807)684-2716
 F: (807)344-0237

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.