



Machine Id
413153
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 10W30 (--- LTR)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0112531	GFL0102658	GFL0097619
Sample Date		Client Info		28 Mar 2024	21 Jan 2024	10 Nov 2023
Machine Age	hrs	Client Info		2699	0	1674
Oil Age	hrs	Client Info		0	0	559
Filter Age	hrs	Client Info		0	0	559
Oil Changed		Client Info		Changed	N/A	Changed
Filter Changed		Client Info		Changed	N/A	Changed
Sample Status				NORMAL	ABNORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>120	14	20	18
Chromium	ppm	ASTM D5185(m)	>20	0	<1	<1
Nickel	ppm	ASTM D5185(m)	>5	2	2	<1
Titanium	ppm	ASTM D5185(m)	>2	0	0	0
Silver	ppm	ASTM D5185(m)	>2	0	<1	<1
Aluminum	ppm	ASTM D5185(m)	>20	2	4	3
Lead	ppm	ASTM D5185(m)	>40	0	<1	4
Copper	ppm	ASTM D5185(m)	>330	11	36	178
Tin	ppm	ASTM D5185(m)	>15	0	<1	<1
Vanadium	ppm	ASTM D5185(m)		0	0	0

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	2	6	5
Potassium	ppm	ASTM D5185(m)	>20	5	8	4
Fuel		WC Method	>3.0	<1.0	0.7	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	ASTM D7844*	>4	0.2	0.4	0.3
Nitration	Abs/cm	ASTM D7624*	>20	7.5	8.3	8.2
Sulfation	Abs/.1mm	ASTM D7415*	>30	19.1	20.0	20.3
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		1	<1	2
Boron	ppm	ASTM D5185(m)	2	2	4	4
Barium	ppm	ASTM D5185(m)	0	0	0	<1
Molybdenum	ppm	ASTM D5185(m)	50	59	59	62
Manganese	ppm	ASTM D5185(m)	0	<1	0	<1
Magnesium	ppm	ASTM D5185(m)	950	973	946	991
Calcium	ppm	ASTM D5185(m)	1050	1050	1071	1095
Phosphorus	ppm	ASTM D5185(m)	995	998	986	977
Zinc	ppm	ASTM D5185(m)	1180	1183	1165	1201
Sulfur	ppm	ASTM D5185(m)	2600	2532	2553	2775
Oxidation	Abs/.1mm	ASTM D7414*	>25	15.2	15.4	16.0
Visc @ 100°C	cSt	ASTM D7279(m)	12.00	11.1	▲ 11.0	11.1

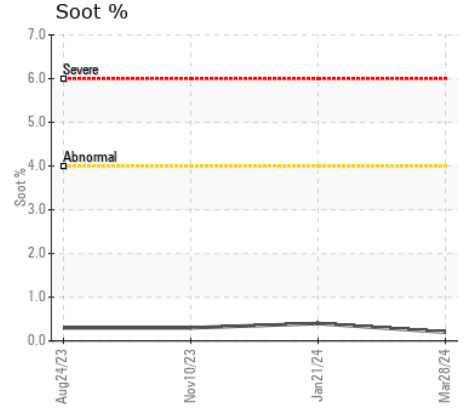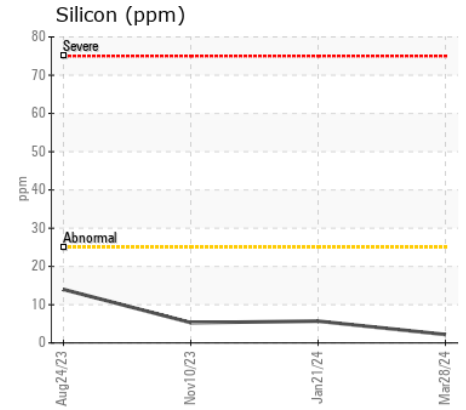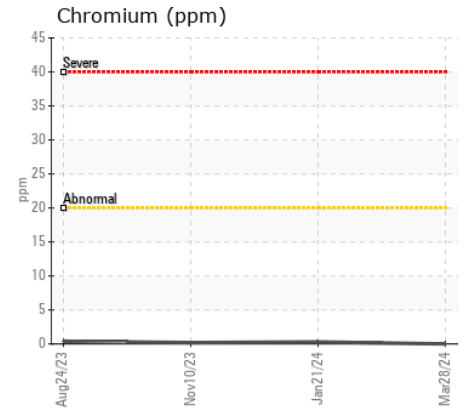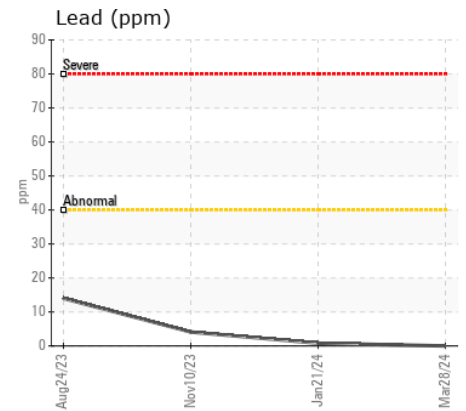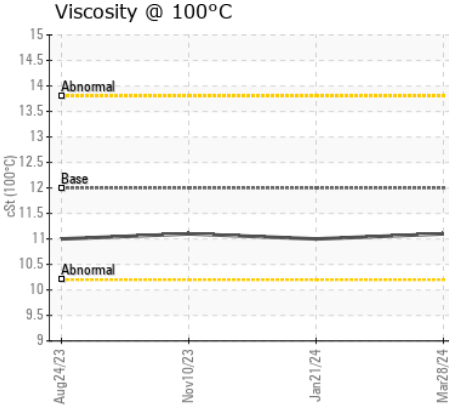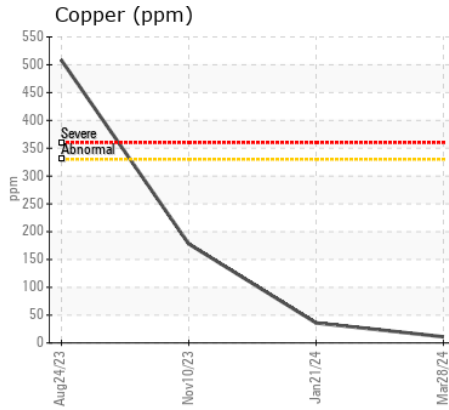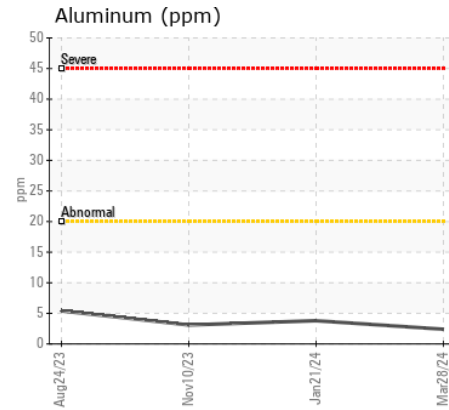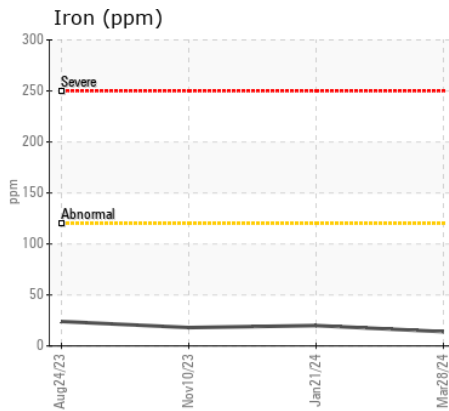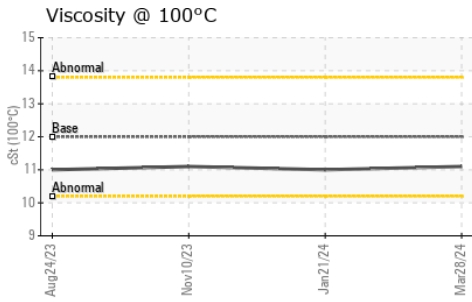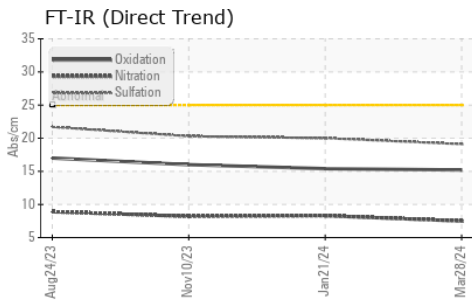

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0112531
Lab Number : 02627581
Unique Number : 5760713
Test Package : MOB 1

GFL Environmental - 554 - Edmonton SW
 8409 - 15th Street NW
 Edmonton, AB
 CA T6P 0B8
 Contact: Tim Greig
 tgreig@gflenv.com
 T: (780)231-0521
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.