



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>SEVERE</b>
FLUID CONDITION	<b>SEVERE</b>

Machine Id  
**117 WEST ST NAPANEE BELL CANADA 6A0260367**  
 Component  
**Right Diesel Engine**  
 Fluid  
**ESSO XD-3 EXTRA SAE 40 (35 LTR)**

**RECOMMENDATION**

We advise that you check the fuel injection system. The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>PN0005993</b>	PN0004646	PN0003032
Sample Date		Client Info		<b>08 Apr 2024</b>	19 Apr 2023	08 Feb 2022
Machine Age	hrs	Client Info		<b>431</b>	422	391
Oil Age	hrs	Client Info		<b>0</b>	0	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>Not Chngd</b>	Changed	Changed
Sample Status				<b>SEVERE</b>	SEVERE	SEVERE

**WEAR**

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185(m)	>120	<b>1</b>	2	3
Chromium	ppm	ASTM D5185(m)	>5	<b>0</b>	0	0
Nickel	ppm	ASTM D5185(m)	>4	<b>0</b>	<1	<1
Titanium	ppm	ASTM D5185(m)	>2	<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185(m)	>5	<b>0</b>	<1	<1
Lead	ppm	ASTM D5185(m)	>25	<b>0</b>	<1	<1
Copper	ppm	ASTM D5185(m)	>40	<b>2</b>	2	3
Tin	ppm	ASTM D5185(m)	>15	<b>0</b>	<1	<1
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0

**CONTAMINATION**












There is a high amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

Silicon	ppm	ASTM D5185(m)	>25	<b>3</b>	2	2
Potassium	ppm	ASTM D5185(m)	>20	<b>2</b>	<1	<1
Fuel	%	ASTM D7593*	>3.0	<b>▲ 9.6</b>	▲ 11.9	▲ 7.3
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	▲ 0.016
Soot %	%	ASTM D7844*	>0.8	<b>0</b>	0	0
Nitration	Abs/cm	ASTM D7624*	>20	<b>3.2</b>	3.7	3.9
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>12.4</b>	13.1	14.6
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

Sodium	ppm	ASTM D5185(m)		<b>2</b>	3	8
Boron	ppm	ASTM D5185(m)		<b>4</b>	14	14
Barium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m)		<b>2</b>	11	13
Manganese	ppm	ASTM D5185(m)		<b>0</b>	<1	0
Magnesium	ppm	ASTM D5185(m)		<b>669</b>	51	34
Calcium	ppm	ASTM D5185(m)	2550	<b>1412</b>	3050	2895
Phosphorus	ppm	ASTM D5185(m)	1000	<b>896</b>	666	708
Zinc	ppm	ASTM D5185(m)	1120	<b>1019</b>	663	759
Sulfur	ppm	ASTM D5185(m)		<b>2352</b>	2150	2117
Oxidation	Abs/.1mm	ASTM D7414*	>25	<b>5.4</b>	4.8	5.6
Visc @ 100°C	cSt	ASTM D7279(m)	14.3	<b>▲ 10.0</b>	▲ 9	▲ 10.3

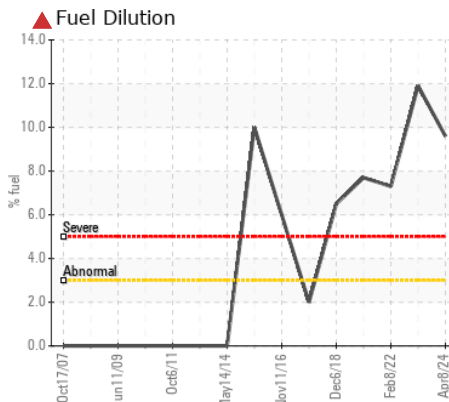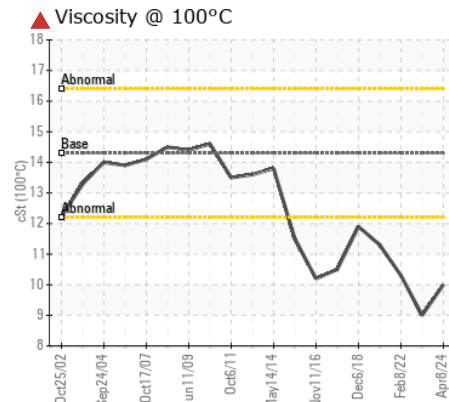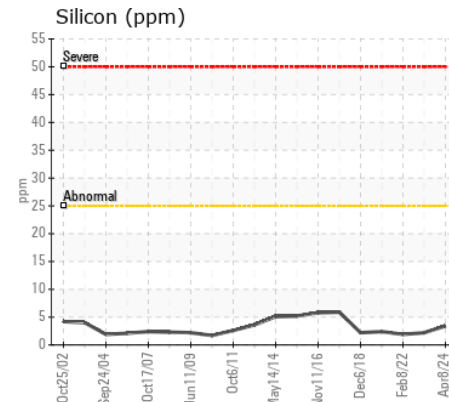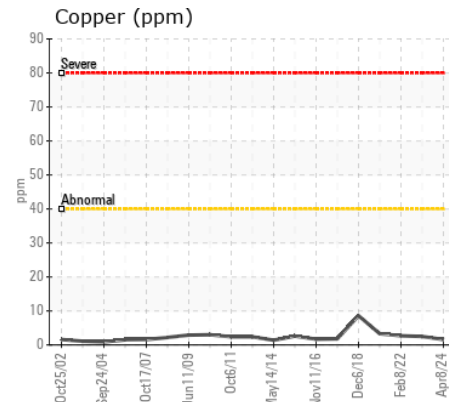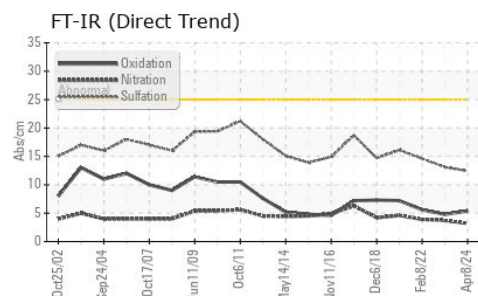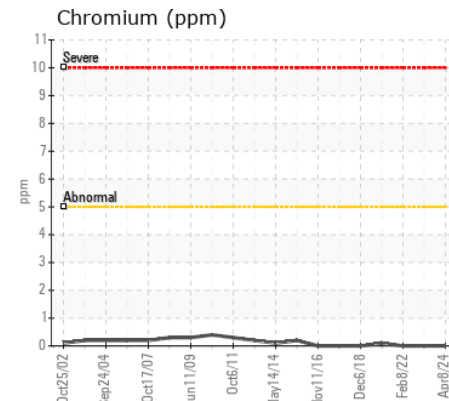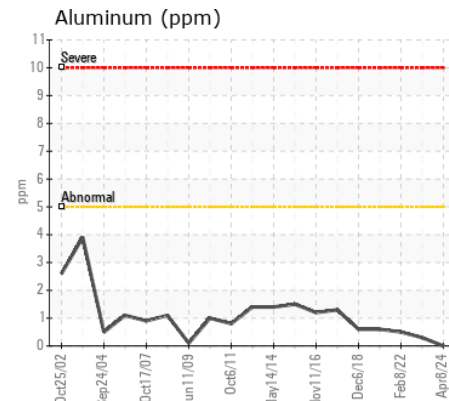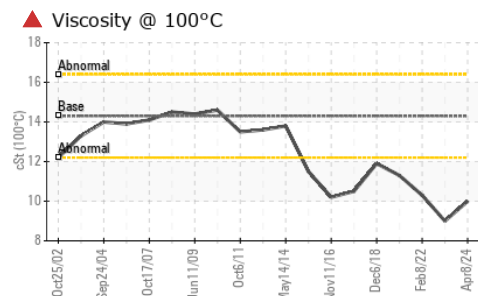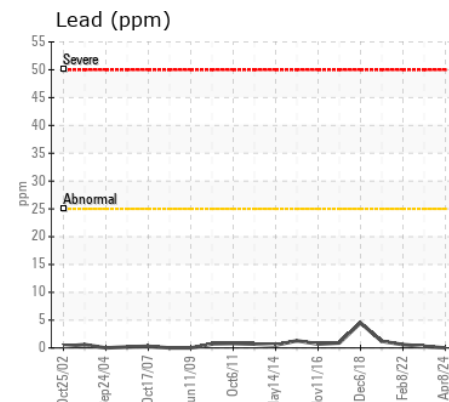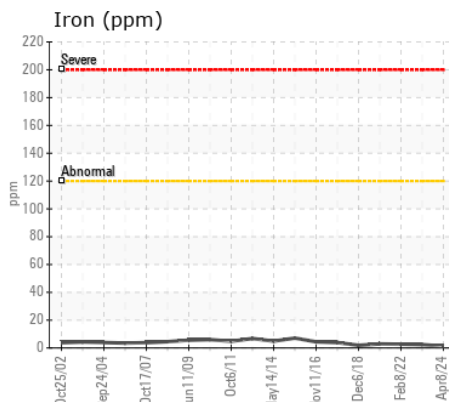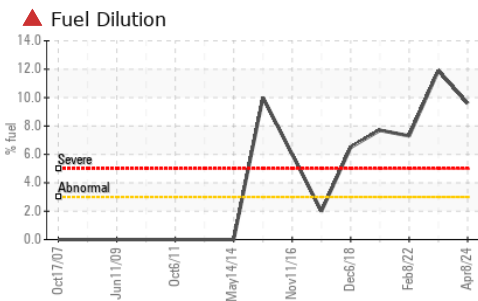

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : PN0005993 **Received** : 09 Apr 2024  
**Lab Number** : 02627625 **Tested** : 10 Apr 2024  
**Unique Number** : 5760757 **Diagnosed** : 10 Apr 2024 - Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: PercentFuel )

**POWER STATION INC.**  
 1050 JAYSON COURT  
 MISSISSAUGA, ON  
 CA L4W 2V5  
 Contact: Ryan Udall  
 rudall@pwrstn.com  
 T: (905)565-1621  
 F: (905)629-1499

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.