



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
75 BRIDGE ST BELLVILLE BELL CANADA 535108265
 Component
Right Diesel Engine
 Fluid
ESSO XD-3 EXTRA 15W40 (80 LTR)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PN0005992	PN0004649	PN0003580
Sample Date		Client Info		05 Apr 2024	20 Apr 2023	22 Apr 2022
Machine Age	hrs	Client Info		384	327	276
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Not Changd	Not Changd
Filter Changed		Client Info		Not Changd	Changed	Changed
Sample Status				NORMAL	NORMAL	MARGINAL

WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185(m)	>100	25	28	34
Chromium	ppm	ASTM D5185(m)	>20	<1	<1	<1
Nickel	ppm	ASTM D5185(m)	>4	0	0	<1
Titanium	ppm	ASTM D5185(m)		0	<1	0
Silver	ppm	ASTM D5185(m)	>3	0	0	0
Aluminum	ppm	ASTM D5185(m)	>20	2	2	2
Lead	ppm	ASTM D5185(m)	>40	2	2	3
Copper	ppm	ASTM D5185(m)	>330	5	4	5
Tin	ppm	ASTM D5185(m)	>15	<1	<1	1
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	2	3	3
Potassium	ppm	ASTM D5185(m)	>20	3	3	3
Fuel		WC Method	>5	<1.0	<1.0	▲ 4
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	ASTM D7844*	>3	0	0	0
Nitration	Abs/cm	ASTM D7624*	>20	7.5	7.5	3.6
Sulfation	Abs/.1mm	ASTM D7415*	>30	18.0	17.3	14.1
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	VLITE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)	>192	6	6	6
Boron	ppm	ASTM D5185(m)		29	33	26
Barium	ppm	ASTM D5185(m)		<1	0	<1
Molybdenum	ppm	ASTM D5185(m)		59	63	54
Manganese	ppm	ASTM D5185(m)		<1	<1	<1
Magnesium	ppm	ASTM D5185(m)		438	410	582
Calcium	ppm	ASTM D5185(m)	3780	1754	1852	1585
Phosphorus	ppm	ASTM D5185(m)	1370	997	1089	1061
Zinc	ppm	ASTM D5185(m)	1500	1144	1177	1189
Sulfur	ppm	ASTM D5185(m)	3800	3256	3126	3063
Oxidation	Abs/.1mm	ASTM D7414*	>25	14.0	13.1	5.8
Visc @ 100°C	cSt	ASTM D7279(m)	15.4	12.2	12.0	12.0

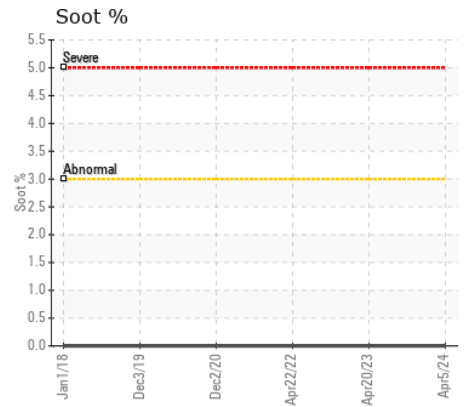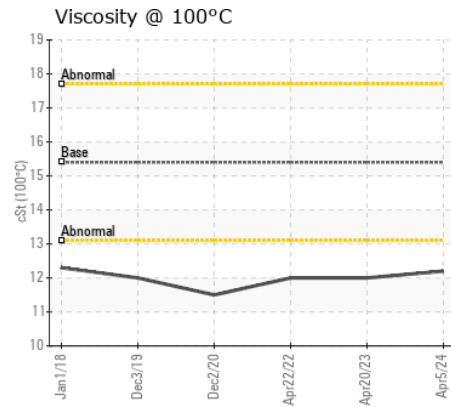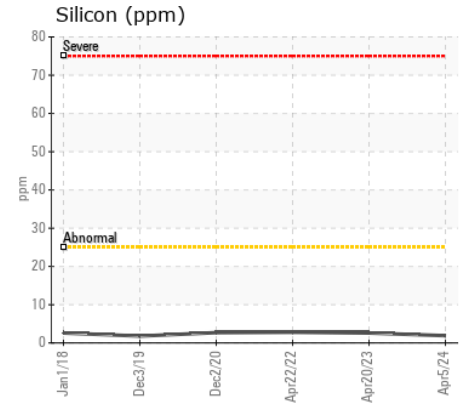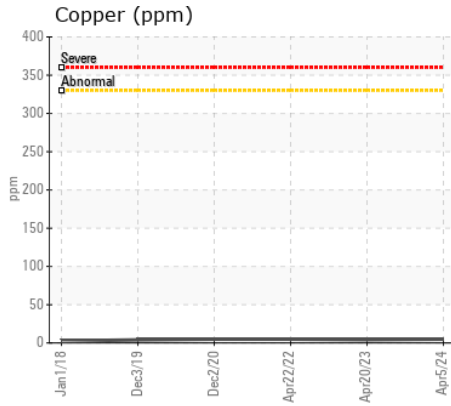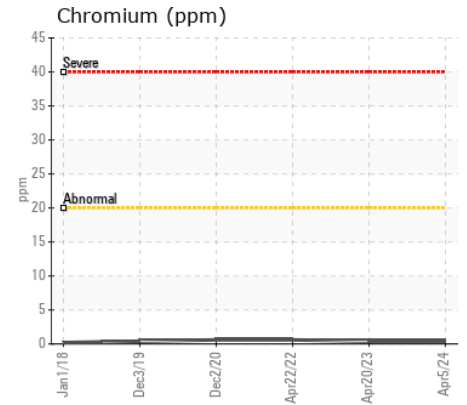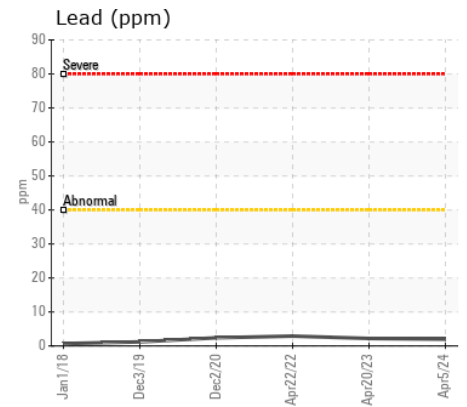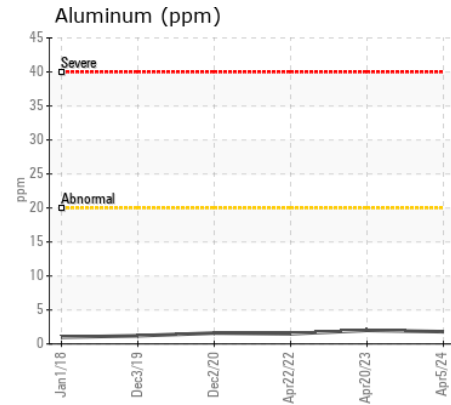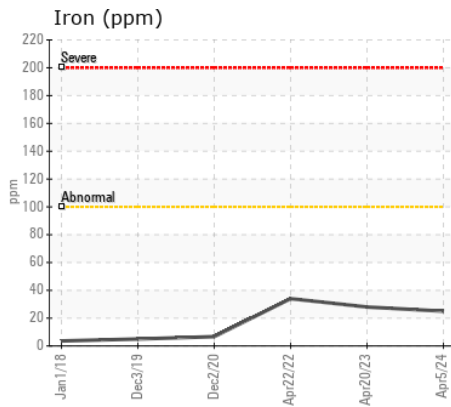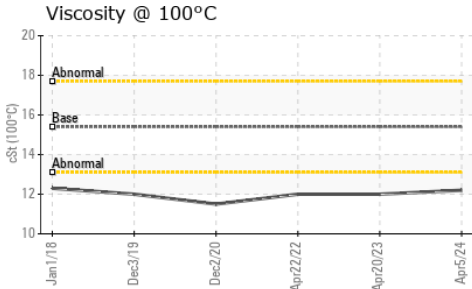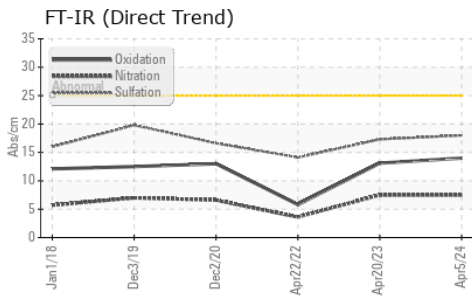

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PN0005992 **Received** : 09 Apr 2024
Lab Number : 02627639 **Tested** : 09 Apr 2024
Unique Number : 5760771 **Diagnosed** : 09 Apr 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: Visual)

POWER STATION INC.
 1050 JAYSON COURT
 MISSISSAUGA, ON
 CA L4W 2V5
 Contact: Brett Kinkley
 Bkinkley@pwrstn.com
 T:
 F: (905)665-8544

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.