



Machine Id
OR925
Component
Diesel Engine
Fluid
PETRO CANADA DURON UHP 5W40 (11 LTR)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PC0082687	PC0056639	PC0057512
Sample Date		Client Info		25 Mar 2024	19 Nov 2022	10 Dec 2021
Machine Age	hrs	Client Info		7841	7240	6854
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	22	9	5
Chromium	ppm	ASTM D5185(m)	>20	<1	0	<1
Nickel	ppm	ASTM D5185(m)	>2	0	<1	<1
Titanium	ppm	ASTM D5185(m)	>2	0	<1	0
Silver	ppm	ASTM D5185(m)	>2	0	0	0
Aluminum	ppm	ASTM D5185(m)	>25	<1	2	1
Lead	ppm	ASTM D5185(m)	>40	1	<1	0
Copper	ppm	ASTM D5185(m)	>330	6	1	<1
Tin	ppm	ASTM D5185(m)	>15	3	<1	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	VLITE	---	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	---	NONE

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	2	5	4
Potassium	ppm	ASTM D5185(m)	>20	<1	<1	<1
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	ASTM D7844*	>3	0.1	0.2	0
Nitration	Abs/cm	ASTM D7624*	>20	8.8	10.1	9.3
Sulfation	Abs/.1mm	ASTM D7415*	>30	20.7	21.0	20.6
Silt	scalar	Visual*	NONE	NONE	---	NONE
Debris	scalar	Visual*	NONE	NONE	---	VLITE
Sand/Dirt	scalar	Visual*	NONE	NONE	---	NONE
Appearance	scalar	Visual*	NORML	NORML	---	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		5	5	4
Boron	ppm	ASTM D5185(m)	65	47	40	39
Barium	ppm	ASTM D5185(m)	0	0	0	0
Molybdenum	ppm	ASTM D5185(m)	65	57	54	52
Manganese	ppm	ASTM D5185(m)	0	<1	<1	<1
Magnesium	ppm	ASTM D5185(m)	1160	1108	1039	1056
Calcium	ppm	ASTM D5185(m)	820	824	770	777
Phosphorus	ppm	ASTM D5185(m)	1160	999	1048	970
Zinc	ppm	ASTM D5185(m)	1260	1200	1155	1119
Sulfur	ppm	ASTM D5185(m)	3000	2735	2744	2596
Oxidation	Abs/.1mm	ASTM D7414*	>25	18.9	19.1	18.9
Visc @ 40°C	cSt	ASTM D7279(m)	95.1	82.9	81.0	82.0
Visc @ 100°C	cSt	ASTM D7279(m)	14.3	13.5	13.4	13.7
Viscosity Index (VI)	Scale	ASTM D2270*	169	166	168	171

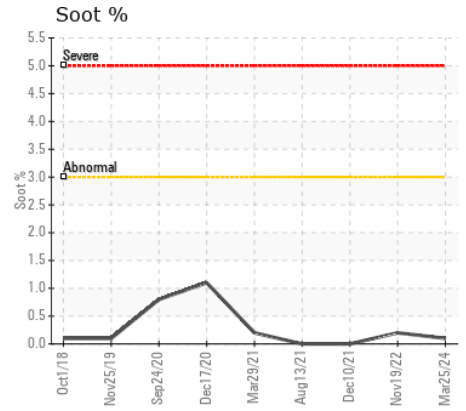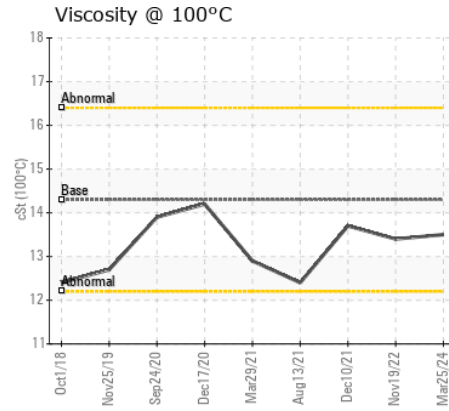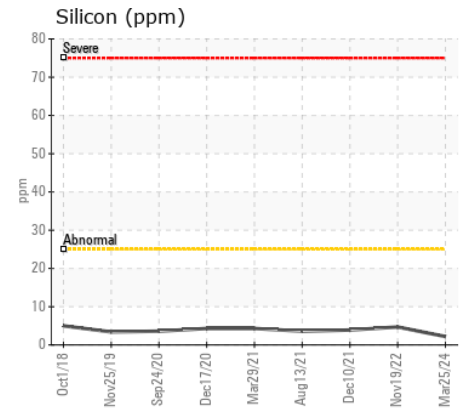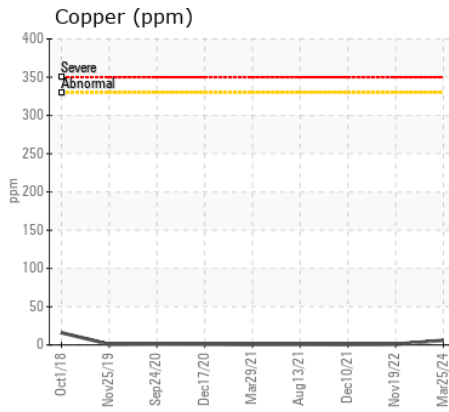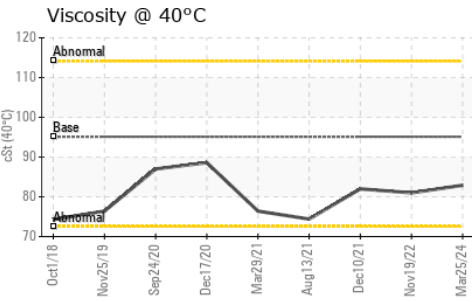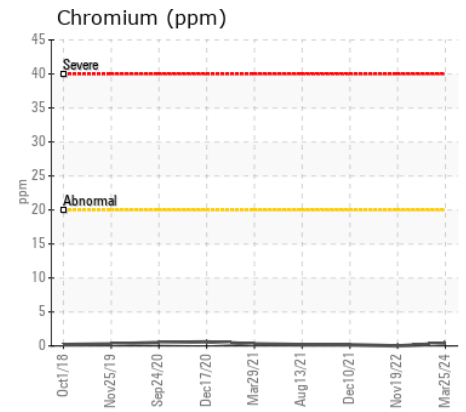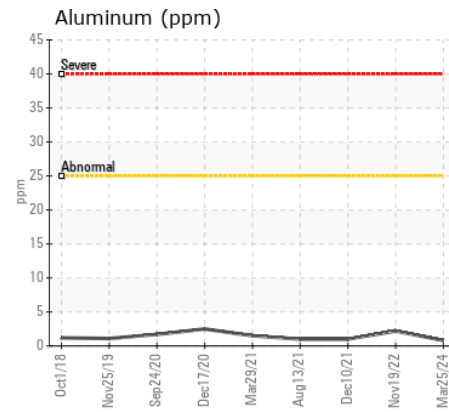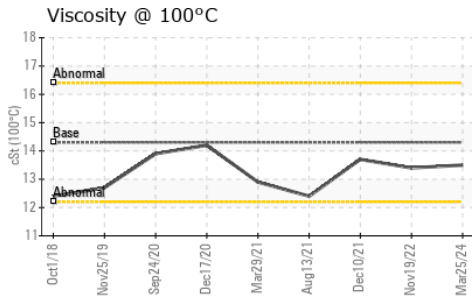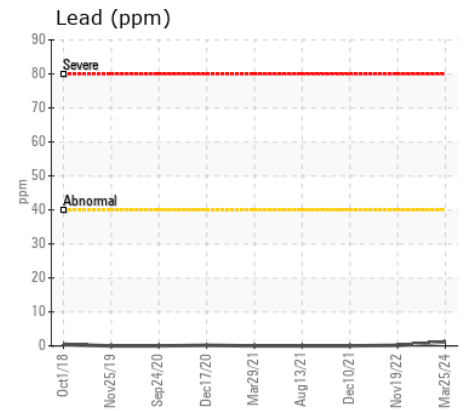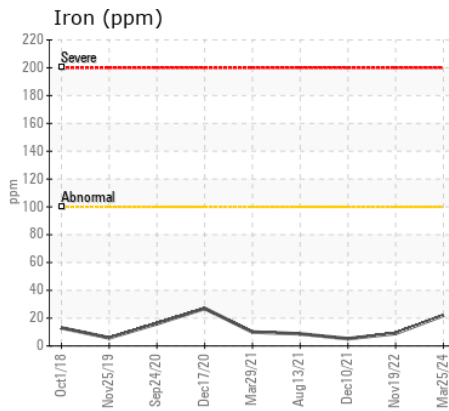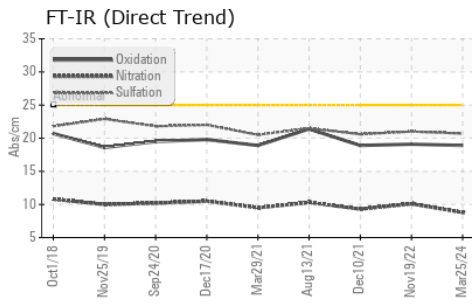

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0082687
Lab Number : 02627829
Unique Number : 5760961
Test Package : MOB 1 (Additional Tests: KV40, VI, Visual)
Received : 10 Apr 2024
Tested : 10 Apr 2024
Diagnosed : 10 Apr 2024 - Wes Davis
 To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

Green Infrastructure and Partners Inc (GIPI) - 286 - Shoring & Foundations
 151 Ram Forest Rd,
 Stouffville, ON
 CA L4A 2G8
 Contact: Shannon Abbott
 sabbott@gipi.com
 T: (905)750-5900
 F: