



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
DJ MARINE [6100262196]
 Machine Id
10132190902
 Component
Main Engine
 Fluid
SHELL ROTELLA T 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VPA040735	---	---
Sample Date		Client Info		09 Apr 2024	---	---
Machine Age	hrs	Client Info		1	---	---
Oil Age	hrs	Client Info		1	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Not Chngd	---	---
Filter Changed		Client Info		Not Chngd	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>120	2	---	---
Chromium	ppm	ASTM D5185(m)	>10	0	---	---
Nickel	ppm	ASTM D5185(m)	>5	0	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)	>5	0	---	---
Aluminum	ppm	ASTM D5185(m)	>20	1	---	---
Lead	ppm	ASTM D5185(m)	>40	0	---	---
Copper	ppm	ASTM D5185(m)	>300	2	---	---
Tin	ppm	ASTM D5185(m)	>10	0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	9	---	---
Potassium	ppm	ASTM D5185(m)	>20	6	---	---
Fuel		WC Method	>4.0	<1.0	---	---
Water		WC Method	>0.1	NEG	---	---
Glycol	%	ASTM D7922*		0.0	---	---
Soot %	%	ASTM D7844*		0	---	---
Nitration	Abs/cm	ASTM D7624*	>20	4.9	---	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	20.3	---	---
Emulsified Water	scalar	Visual*	>0.1	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		3	---	---
Boron	ppm	ASTM D5185(m)	35	155	---	---
Barium	ppm	ASTM D5185(m)	0	<1	---	---
Molybdenum	ppm	ASTM D5185(m)	0	11	---	---
Manganese	ppm	ASTM D5185(m)	0	<1	---	---
Magnesium	ppm	ASTM D5185(m)	10	76	---	---
Calcium	ppm	ASTM D5185(m)	2340	1911	---	---
Phosphorus	ppm	ASTM D5185(m)	1110	894	---	---
Zinc	ppm	ASTM D5185(m)	1210	1017	---	---
Sulfur	ppm	ASTM D5185(m)	3890	2714	---	---
Oxidation	Abs/.1mm	ASTM D7414*	>25	15.9	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	15.7	13.9	---	---

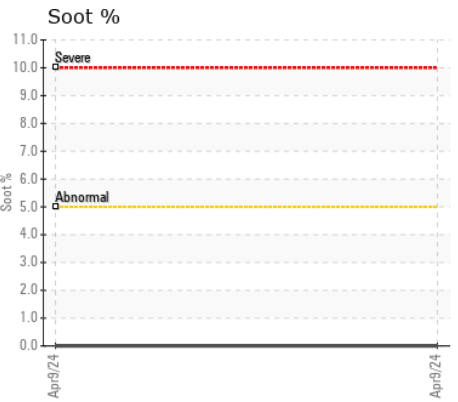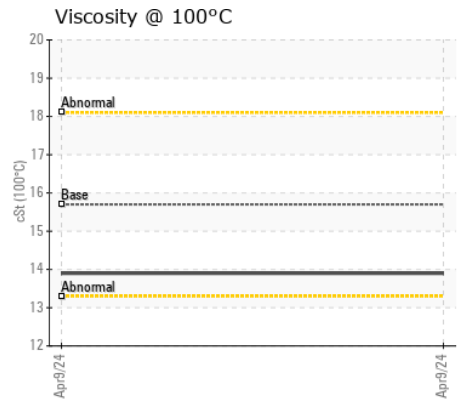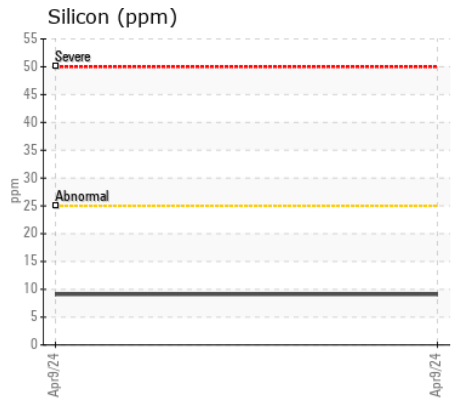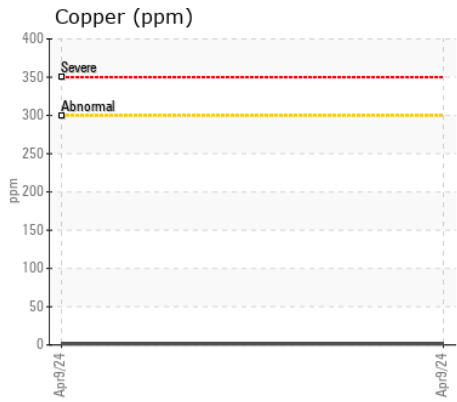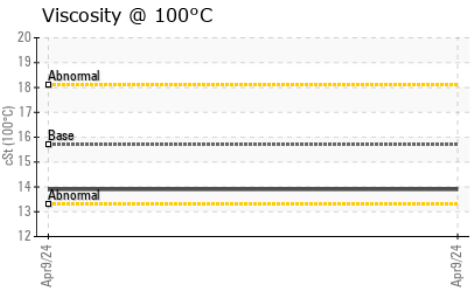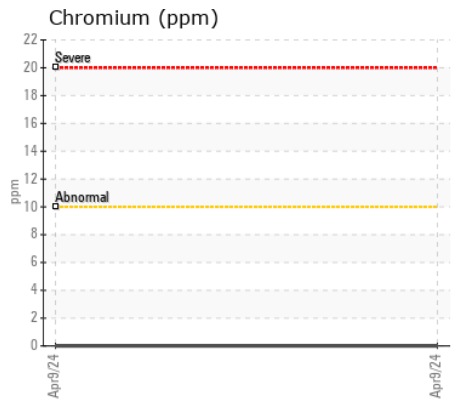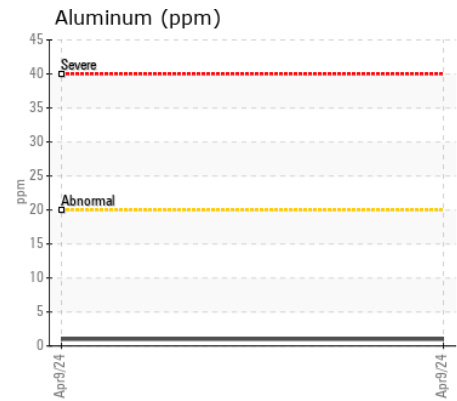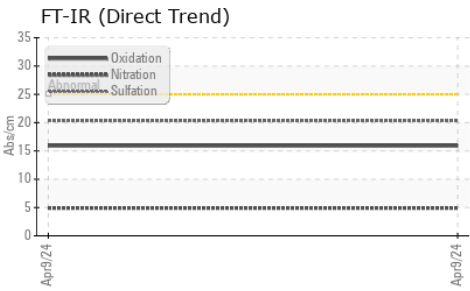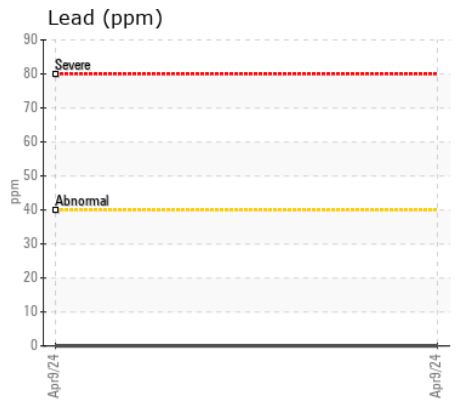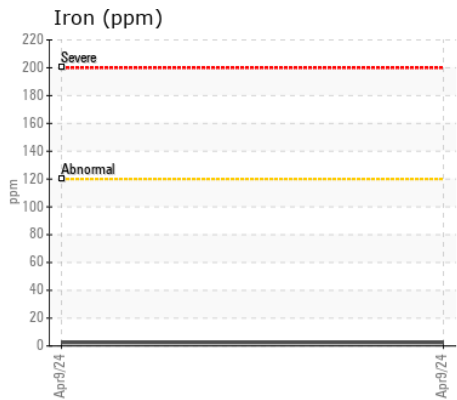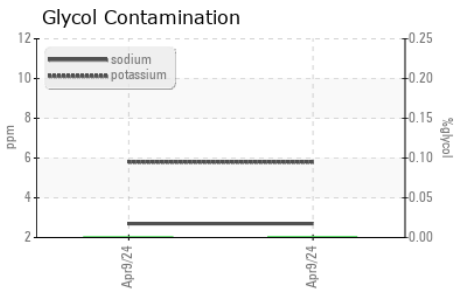

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : VPA040735 **Received** : 10 Apr 2024
Lab Number : 02627835 **Tested** : 10 Apr 2024
Unique Number : 5760967 **Diagnosed** : 10 Apr 2024 - Kevin Marson
Test Package : MOB 1 (Additional Tests: Glycol)

Wajax Power Systems
 485 Venture Drive
 MONCTON, NB
 CA E1H 2P4
 Contact: Jeffrey West
 jwest@wajax.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.