



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
511012
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 10W30 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0115555	GFL0090890	GFL0079651
Sample Date		Client Info		08 Apr 2024	11 Oct 2023	25 Apr 2023
Machine Age	kms	Client Info		454909	409313	356653
Oil Age	kms	Client Info		0	52660	151705
Filter Age	kms	Client Info		0	52660	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>120	53	53	37
Chromium	ppm	ASTM D5185(m)	>20	<1	<1	<1
Nickel	ppm	ASTM D5185(m)	>5	<1	1	1
Titanium	ppm	ASTM D5185(m)	>2	0	0	0
Silver	ppm	ASTM D5185(m)	>2	0	<1	0
Aluminum	ppm	ASTM D5185(m)	>20	2	3	3
Lead	ppm	ASTM D5185(m)	>40	1	3	3
Copper	ppm	ASTM D5185(m)	>330	10	10	10
Tin	ppm	ASTM D5185(m)	>15	<1	1	2
Vanadium	ppm	ASTM D5185(m)		0	0	0

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	6	7	5
Potassium	ppm	ASTM D5185(m)	>20	7	21	3
Fuel		WC Method	>3.0	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol	%	ASTM D7922*		0.0	0.0	NEG
Soot %	%	ASTM D7844*	>4	0.2	0.3	0.4
Nitration	Abs/cm	ASTM D7624*	>20	10.9	10.0	10.3
Sulfation	Abs/.1mm	ASTM D7415*	>30	21.2	22.1	22.7
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		20	66	2
Boron	ppm	ASTM D5185(m)	2	3	5	1
Barium	ppm	ASTM D5185(m)	0	1	<1	0
Molybdenum	ppm	ASTM D5185(m)	50	63	68	63
Manganese	ppm	ASTM D5185(m)	0	1	<1	<1
Magnesium	ppm	ASTM D5185(m)	950	982	961	971
Calcium	ppm	ASTM D5185(m)	1050	1105	1135	1153
Phosphorus	ppm	ASTM D5185(m)	995	979	927	1006
Zinc	ppm	ASTM D5185(m)	1180	1209	1191	1224
Sulfur	ppm	ASTM D5185(m)	2600	2313	2307	2390
Oxidation	Abs/.1mm	ASTM D7414*	>25	17.2	17.9	18.3
Visc @ 100°C	cSt	ASTM D7279(m)	12.00	11.2	11.1	11.3

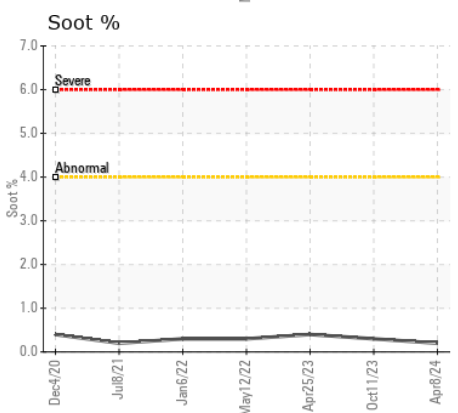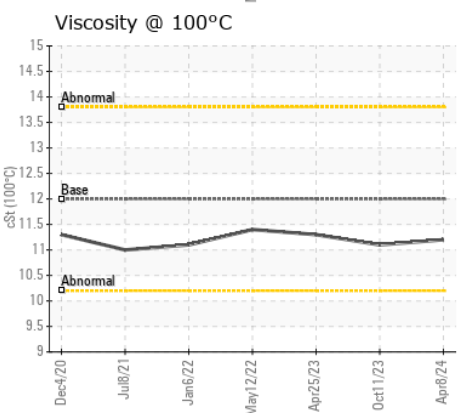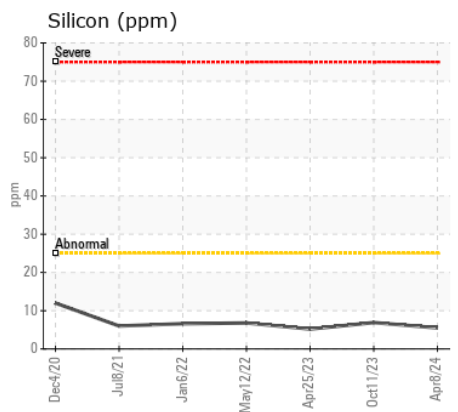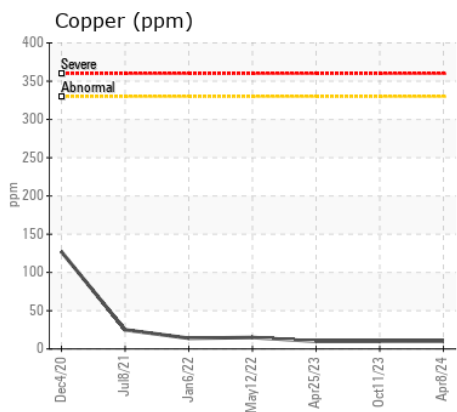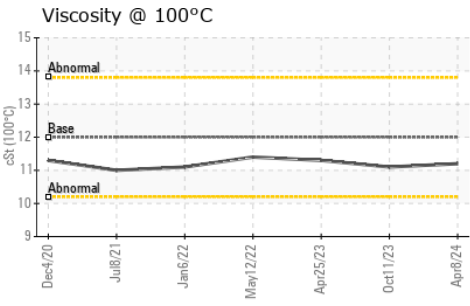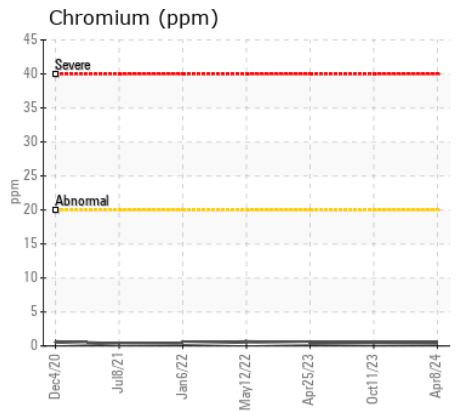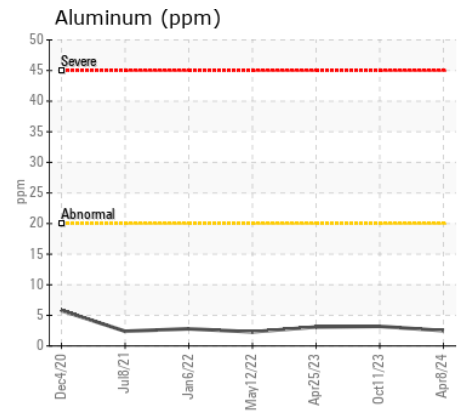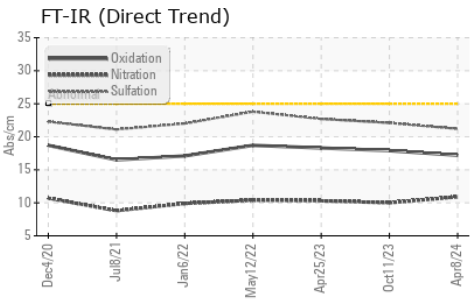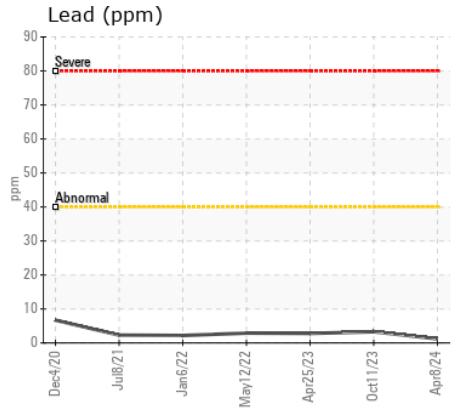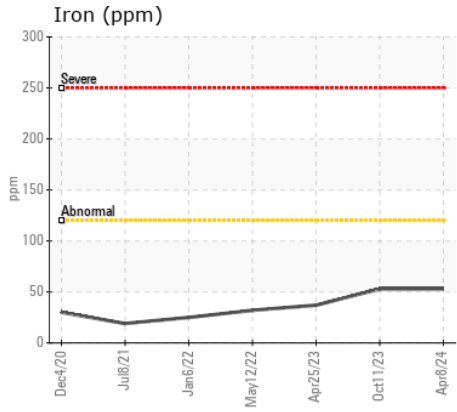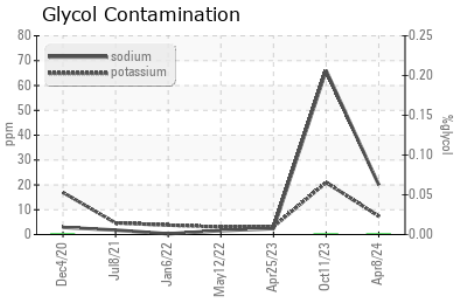

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0115555 **Received** : 11 Apr 2024
Lab Number : 02628046 **Tested** : 11 Apr 2024
Unique Number : 5761178 **Diagnosed** : 11 Apr 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: Glycol)

GFL Environmental - 245 - BJ Bear
 2616 Cedar Creek Road
 Ayr, ON
 CA N0B 1E0
 Contact: Erik Prpic
 eprpic@gflenv.com
 T: (519)570-9000
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.