



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
(MMSI 31605) DMC ENTERPRISES LTD
 Machine Id
80 FT COMMERCIAL FIS MV PETTENS LEGACY
 Component
Main Engine
 Fluid
SHELL ROTELLA T 15W40 (160 LTR)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		OF0001078	---	---
Sample Date		Client Info		08 Apr 2024	---	---
Machine Age	hrs	Client Info		18	---	---
Oil Age	hrs	Client Info		18	---	---
Filter Age	hrs	Client Info		18	---	---
Oil Changed		Client Info		Not Changd	---	---
Filter Changed		Client Info		Not Changd	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>75	2	---	---
Chromium	ppm	ASTM D5185(m)	>8	0	---	---
Nickel	ppm	ASTM D5185(m)	>2	<1	---	---
Titanium	ppm	ASTM D5185(m)	>3	0	---	---
Silver	ppm	ASTM D5185(m)	>2	0	---	---
Aluminum	ppm	ASTM D5185(m)	>15	<1	---	---
Lead	ppm	ASTM D5185(m)	>18	0	---	---
Copper	ppm	ASTM D5185(m)	>80	6	---	---
Tin	ppm	ASTM D5185(m)	>14	0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>20	5	---	---
Potassium	ppm	ASTM D5185(m)	>20	7	---	---
Fuel		WC Method	>4.0	<1.0	---	---
Water		WC Method	>0.1	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	ASTM D7844*		0	---	---
Nitration	Abs/cm	ASTM D7624*	>20	4.8	---	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	20.2	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	VLITE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.1	NEG	---	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185(m)	>75	3	---	---
Boron	ppm	ASTM D5185(m)	35	252	---	---
Barium	ppm	ASTM D5185(m)	0	3	---	---
Molybdenum	ppm	ASTM D5185(m)	0	11	---	---
Manganese	ppm	ASTM D5185(m)	0	<1	---	---
Magnesium	ppm	ASTM D5185(m)	10	11	---	---
Calcium	ppm	ASTM D5185(m)	2340	2520	---	---
Phosphorus	ppm	ASTM D5185(m)	1110	957	---	---
Zinc	ppm	ASTM D5185(m)	1210	1087	---	---
Sulfur	ppm	ASTM D5185(m)	3890	3405	---	---
Oxidation	Abs/.1mm	ASTM D7414*	>25	14.4	---	---
Base Number (BN)	mg KOH/g	ASTM D2896*	10.1	10.93	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	15.7	13.7	---	---

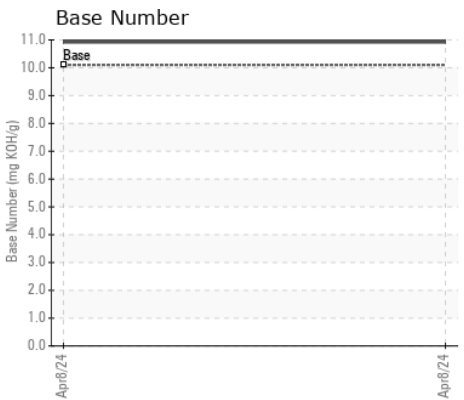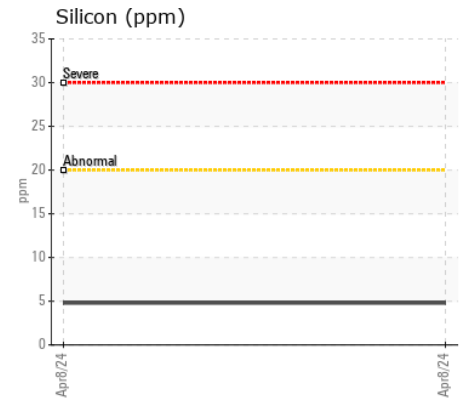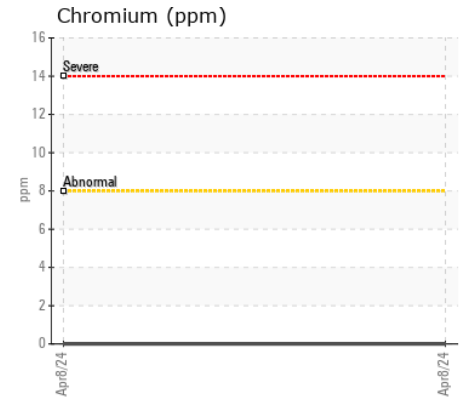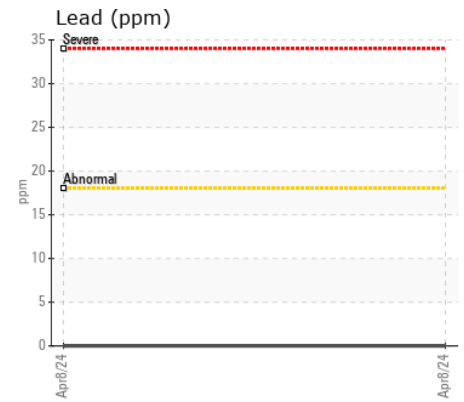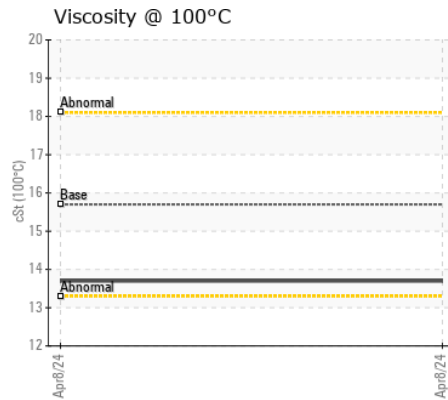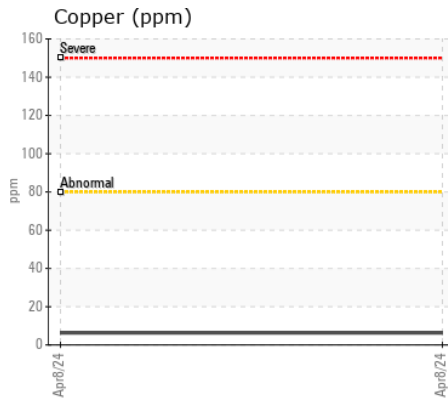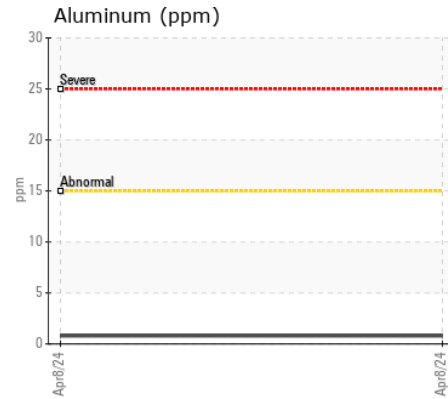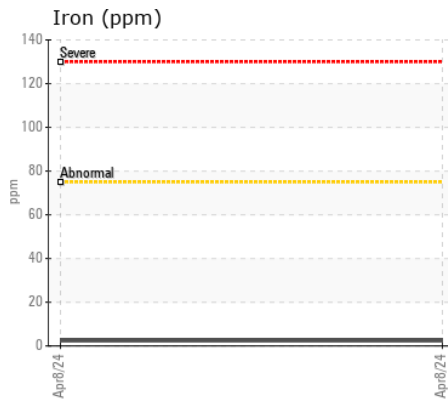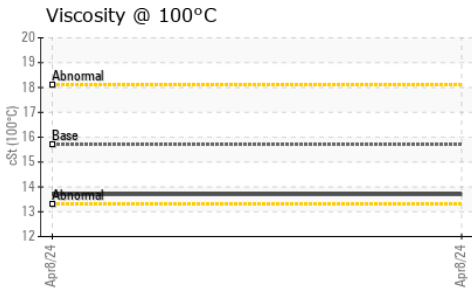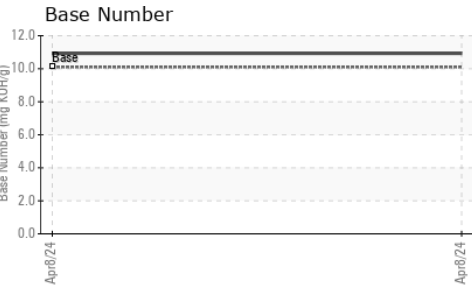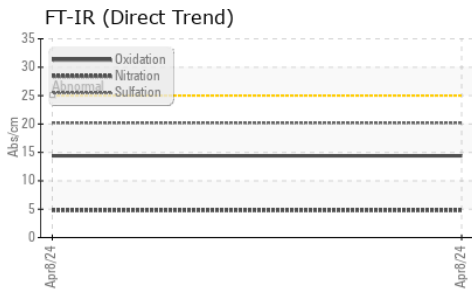

ISO 17025:2017
Accredited
Laboratory

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : OF0001078 **Received** : 11 Apr 2024
Lab Number : **02628153** **Tested** : 12 Apr 2024
Unique Number : 5761285 **Diagnosed** : 12 Apr 2024 - Wes Davis
Test Package : MOB 2 (Additional Tests: Visual)

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

Oil Filtration Solutions Ltd.
 PO BOX 16125
 CONCEPTION BAY SOUTH, NL
 CA A1X 2E2
 Contact: BILL BUTLER
 BBUTLER@OILFILTRATIONSOLUTIONS.COM
 T: (709)834-8433
 F: (709)834-8435