



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
OR483
Component
Hydraulic System
Fluid

APRIL SUPERFLO RXL1 RED AW HYDRAULIC OIL AW 32 (--- GAL)

RECOMMENDATION

Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0114946	GFL0089194	GFL0089176
Sample Date		Client Info		05 Apr 2024	01 Feb 2024	22 Dec 2023
Machine Age	hrs	Client Info		12523	12231	12046
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	Not Changd	Not Changd
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

Les taux d'usure de tous les composants sont normaux.

Iron	ppm	ASTM D5185(m)	>71	5	6	6
Chromium	ppm	ASTM D5185(m)	>11	5	7	6
Nickel	ppm	ASTM D5185(m)	>6	0	0	0
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)		0	0	0
Aluminum	ppm	ASTM D5185(m)	>11	<1	1	<1
Lead	ppm	ASTM D5185(m)	>13	0	<1	0
Copper	ppm	ASTM D5185(m)	>21	<1	<1	<1
Tin	ppm	ASTM D5185(m)	>5	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE

CONTAMINATION








La propreté du système est acceptable pour votre objectif de propreté ISO 4406. La propreté du système et du fluide est acceptable.

Silicon	ppm	ASTM D5185(m)	>24	<1	2	2
Potassium	ppm	ASTM D5185(m)	>20	<1	1	11
Water		WC Method	>0.075	NEG	NEG	NEG
Particles >4µm		ASTM D7647	>80000	5759	3956	7313
Particles >6µm		ASTM D7647	>5000	1454	1070	1453
Particles >14µm		ASTM D7647	>640	139	109	73
Particles >21µm		ASTM D7647	>160	33	28	24
Particles >38µm		ASTM D7647	>40	2	3	4
Particles >71µm		ASTM D7647	>10	0	0	1
Oil Cleanliness		ISO 4406 (c)	>23/19/16	20/18/14	19/17/14	20/18/13
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	VLITE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	VLITE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.075	NEG	NEG	NEG

FLUID CONDITION

L'état de l'huile est acceptable pour la durée de service.

Sodium	ppm	ASTM D5185(m)	>21	2	1	1
Boron	ppm	ASTM D5185(m)		1	1	2
Barium	ppm	ASTM D5185(m)		0	0	0
Molybdenum	ppm	ASTM D5185(m)		0	<1	<1
Manganese	ppm	ASTM D5185(m)		0	0	0
Magnesium	ppm	ASTM D5185(m)		14	18	20
Calcium	ppm	ASTM D5185(m)		1060	1476	1569
Phosphorus	ppm	ASTM D5185(m)		614	748	768
Zinc	ppm	ASTM D5185(m)		688	790	821
Sulfur	ppm	ASTM D5185(m)		1593	2149	2159
Visc @ 40°C	cSt	ASTM D7279(m)	32	34.5	35.9	36.7

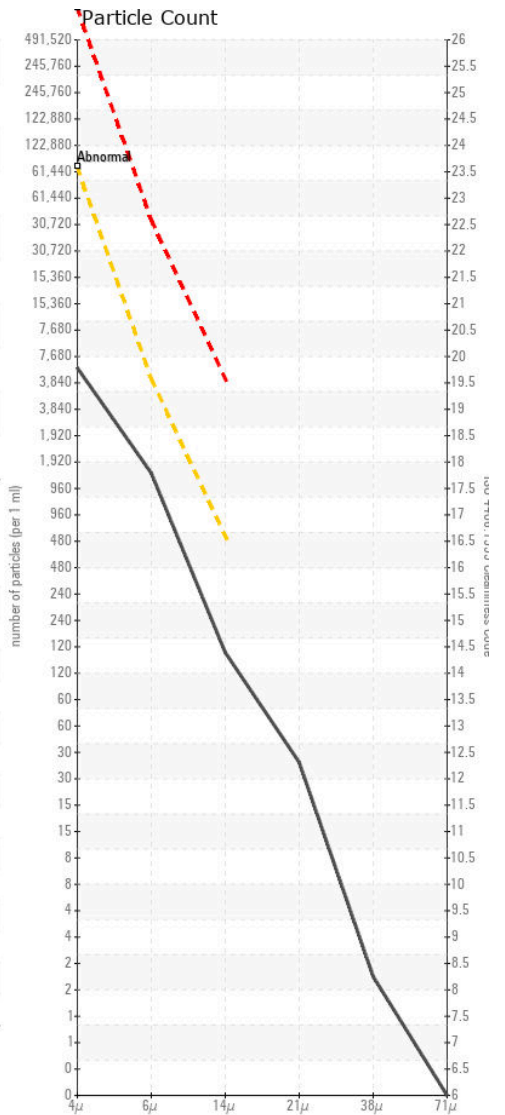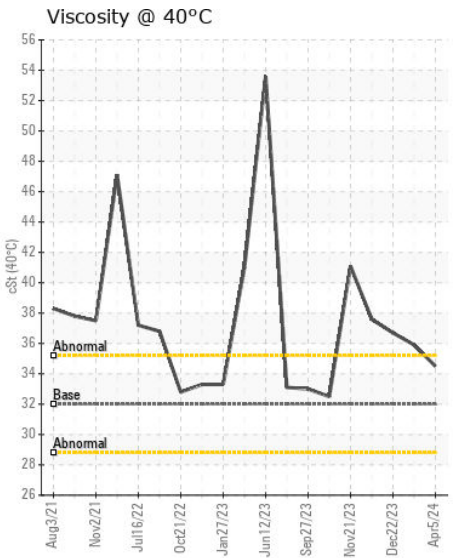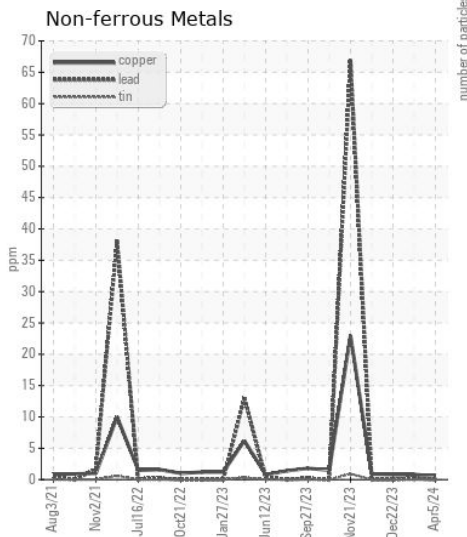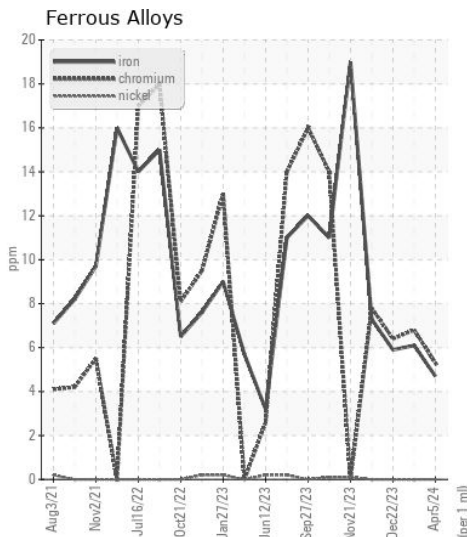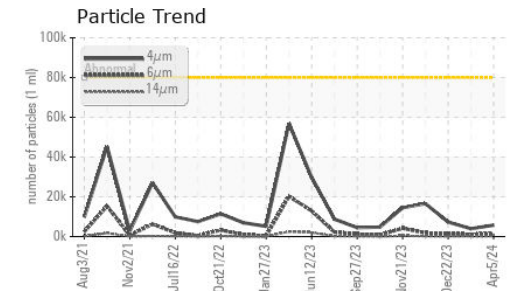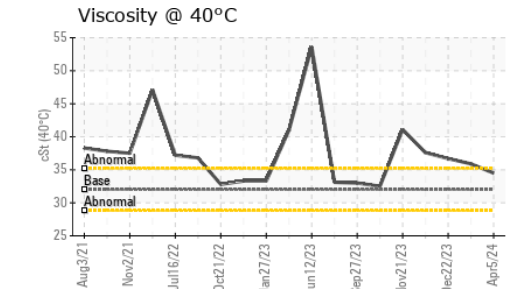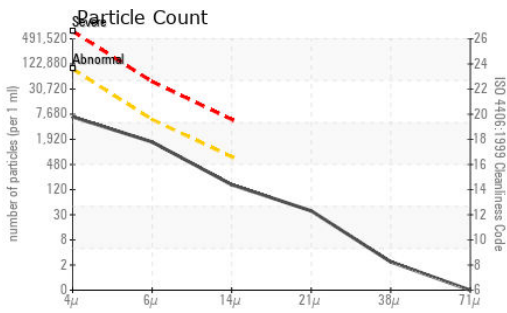

ISO 17025:2017
Accredited
Laboratory

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0114946
Lab Number : 02628233
Unique Number : 5761365
Test Package : MOB 1 (Additional Tests: PrtCount)

GFL Environmental - 784 - Saint-Hyacinthe
 3525 Boul. Laurier Est.,
 Saint-Hyacinthe, QC
 CA J2R 2B2
 Contact: Nadine Authier
 nauthier@matrec.ca
 T: (450)773-9689
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.