



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
813079
Component
Transmission (Auto)
Fluid
DEXRON III (--- GAL)

RECOMMENDATION

Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition. Le fluide n'était pas spécifié, toutefois, une comparaison avec d'autres fluides indiqu que ce fluide est du (GENERIC) DEXRON III. Veuillez confirmer.

WEAR

Les taux d'usure de tous les composants sont normaux.

CONTAMINATION

Il n'y a aucun indice de contamination dans le fluide.

FLUID CONDITION











L'état de le fluide est acceptable pour la durée de service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PC0088256	PC0077619	PC0075499
Sample Date		Client Info		09 Apr 2024	19 Oct 2023	17 Aug 2023
Machine Age	hrs	Client Info		54163	40624	31245
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

Iron	ppm	ASTM D5185(m)	>160	100	87	81
Chromium	ppm	ASTM D5185(m)	>5	<1	<1	<1
Nickel	ppm	ASTM D5185(m)	>5	<1	<1	<1
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)	>5	0	<1	0
Aluminum	ppm	ASTM D5185(m)	>50	46	36	31
Lead	ppm	ASTM D5185(m)	>50	24	14	9
Copper	ppm	ASTM D5185(m)	>225	9	7	6
Tin	ppm	ASTM D5185(m)	>10	3	2	2
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	NONE	VLITE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE

Silicon	ppm	ASTM D5185(m)	>20	8	8	8
Potassium	ppm	ASTM D5185(m)	>20	4	4	4
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	VLITE	VLITE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	NEG

Sodium	ppm	ASTM D5185(m)		9	9	7
Boron	ppm	ASTM D5185(m)		68	70	75
Barium	ppm	ASTM D5185(m)		<1	<1	<1
Molybdenum	ppm	ASTM D5185(m)		0	0	<1
Manganese	ppm	ASTM D5185(m)		2	2	2
Magnesium	ppm	ASTM D5185(m)		3	3	3
Calcium	ppm	ASTM D5185(m)		87	86	85
Phosphorus	ppm	ASTM D5185(m)		237	245	256
Zinc	ppm	ASTM D5185(m)		11	9	10
Sulfur	ppm	ASTM D5185(m)		1061	1107	1122
Visc @ 40°C	cSt	ASTM D7279(m)	26.0	33.9	34.1	34.4
Visc @ 100°C	cSt	ASTM D7279(m)	5.5	6.7	6.8	6.9
Viscosity Index (VI)	Scale	ASTM D2270*	155	158	162	165

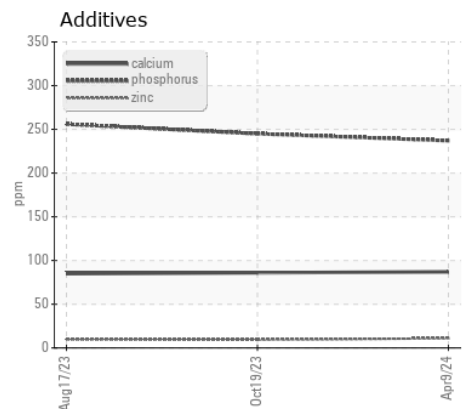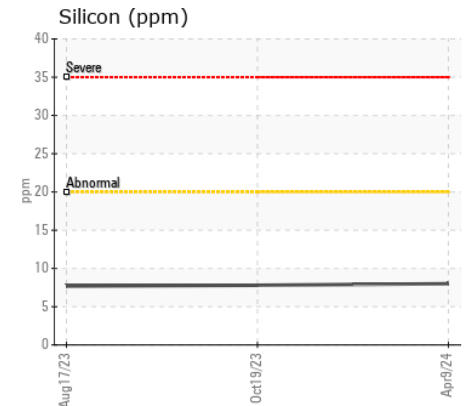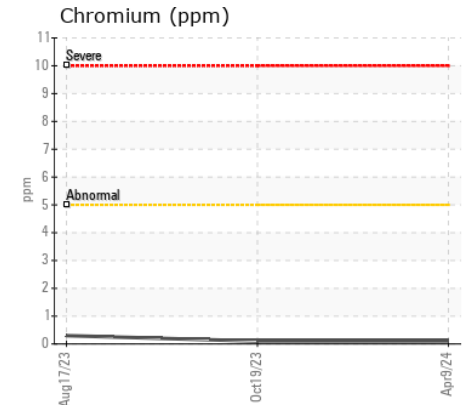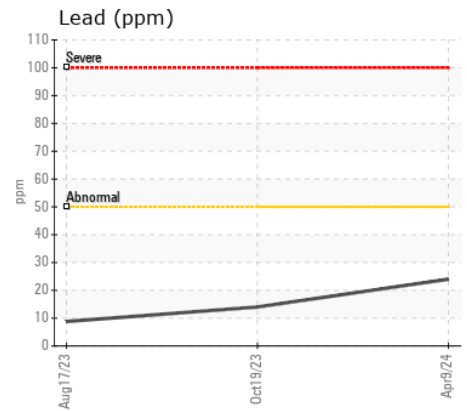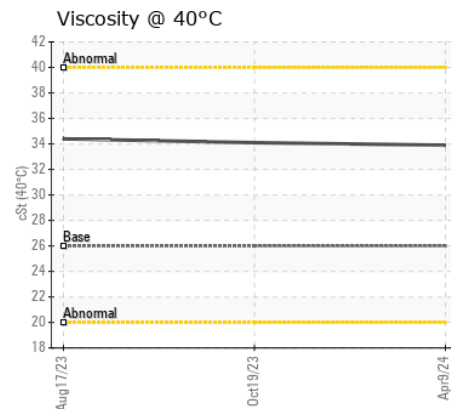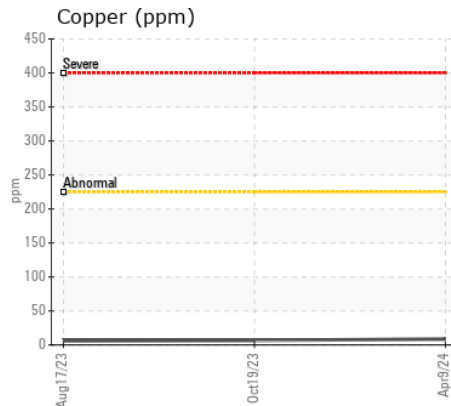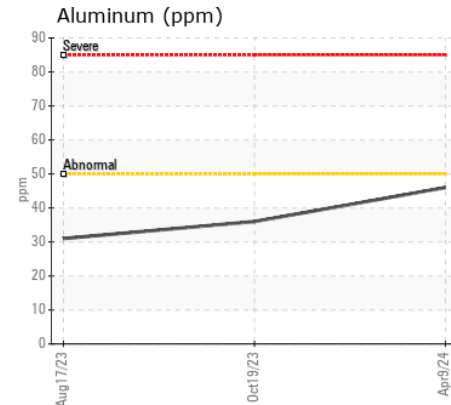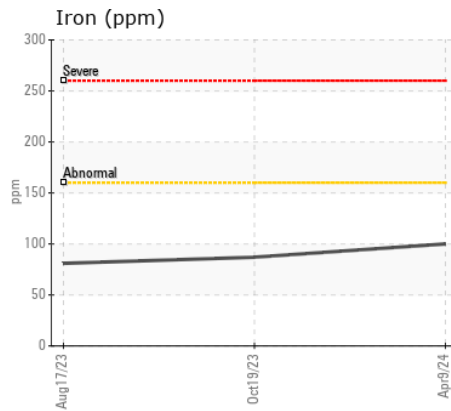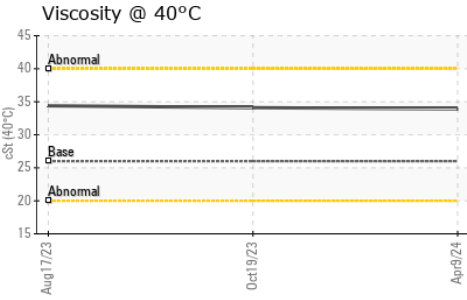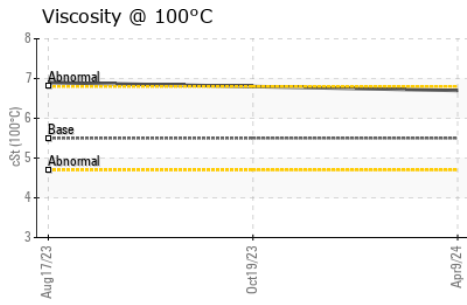

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0088256 **Received** : 11 Apr 2024
Lab Number : 02628243 **Tested** : 11 Apr 2024
Unique Number : 5761375 **Diagnosed** : 11 Apr 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: KV100, VI)

GFL Environmental - 737 - Quebec City Hauling
 6205 Boul. Wilfrid Hamel,
 Quebec City, QC
 CA G2E 5G8
 Contact: Dave Beaulieu
 davebeaulieu@matrec.ca

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
F: