

Machine Id  
**WL0055**  
Component  
**Transmission (Manual)**  
Fluid  
**TDTO FLUID SAE 10W (--- GAL)**

### RECOMMENDATION

Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition. Veuillez préciser la marque et le modèle du composant lors du prochain échantillon.

### WEAR

Les taux d'usure de tous les composants sont normaux.










### CONTAMINATION

Il n'y a aucun indice de contamination dans le fluide.

### FLUID CONDITION

L'état de le fluide est acceptable pour la durée de service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>GFL0118317</b>	GFL0067528	---
Sample Date		Client Info		<b>08 Apr 2024</b>	25 Mar 2024	---
Machine Age	kms	Client Info		<b>15702</b>	15613	---
Oil Age	kms	Client Info		<b>0</b>	0	---
Filter Age	kms	Client Info		<b>0</b>	0	---
Oil Changed		Client Info		<b>N/A</b>	N/A	---
Filter Changed		Client Info		<b>N/A</b>	N/A	---
Sample Status				<b>NORMAL</b>	NORMAL	---
Iron	ppm	ASTM D5185(m)	>200	<b>9</b>	11	---
Chromium	ppm	ASTM D5185(m)	>5	<b>0</b>	0	---
Nickel	ppm	ASTM D5185(m)	>5	<b>&lt;1</b>	0	---
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	---
Silver	ppm	ASTM D5185(m)	>7	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185(m)	>25	<b>1</b>	2	---
Lead	ppm	ASTM D5185(m)	>45	<b>0</b>	0	---
Copper	ppm	ASTM D5185(m)	>225	<b>&lt;1</b>	<1	---
Tin	ppm	ASTM D5185(m)	>10	<b>0</b>	0	---
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	---
White Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	---
Silicon	ppm	ASTM D5185(m)	>125	<b>4</b>	6	---
Potassium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	<1	---
Water		WC Method	>0.1	<b>NEG</b>	NEG	---
Silt	scalar	Visual*	NONE	<b>NONE</b>	NONE	---
Debris	scalar	Visual*	NONE	<b>VLITE</b>	VLITE	---
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	VLITE	---
Appearance	scalar	Visual*	NORML	<b>NORML</b>	NORML	---
Odor	scalar	Visual*	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	Visual*	>0.1	<b>NEG</b>	NEG	---
Sodium	ppm	ASTM D5185(m)		<b>&lt;1</b>	1	---
Boron	ppm	ASTM D5185(m)	37	<b>20</b>	23	---
Barium	ppm	ASTM D5185(m)	7	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185(m)	5	<b>3</b>	3	---
Manganese	ppm	ASTM D5185(m)		<b>0</b>	0	---
Magnesium	ppm	ASTM D5185(m)	40	<b>61</b>	69	---
Calcium	ppm	ASTM D5185(m)	2650	<b>3218</b>	3175	---
Phosphorus	ppm	ASTM D5185(m)	1050	<b>943</b>	944	---
Zinc	ppm	ASTM D5185(m)	1075	<b>1117</b>	1142	---
Sulfur	ppm	ASTM D5185(m)	5750	<b>3000</b>	3059	---
Visc @ 40°C	cSt	ASTM D7279(m)	40	<b>42.1</b>	43.0	---

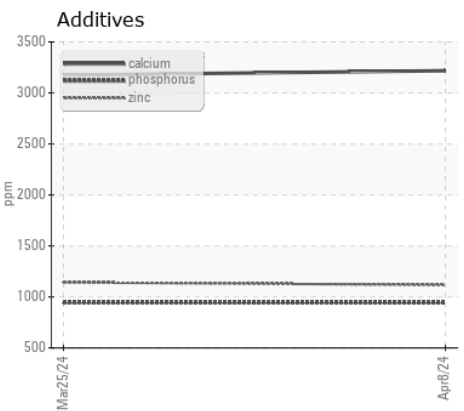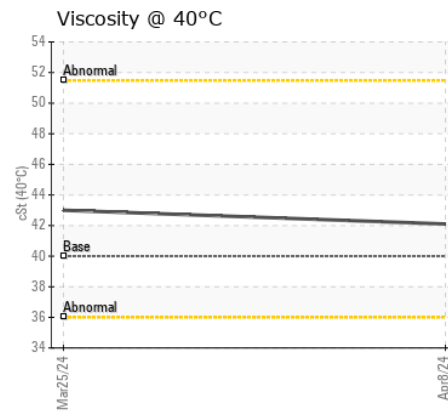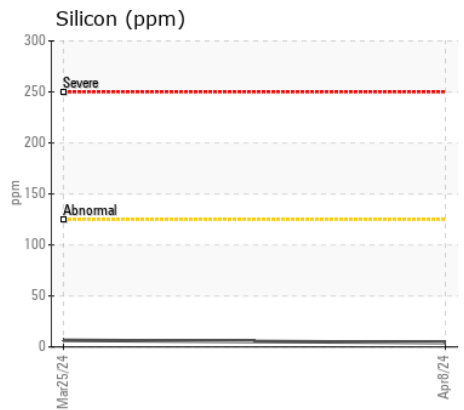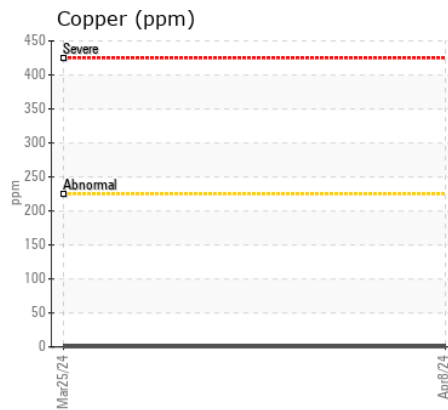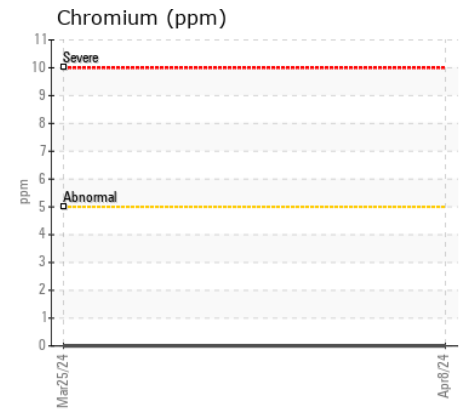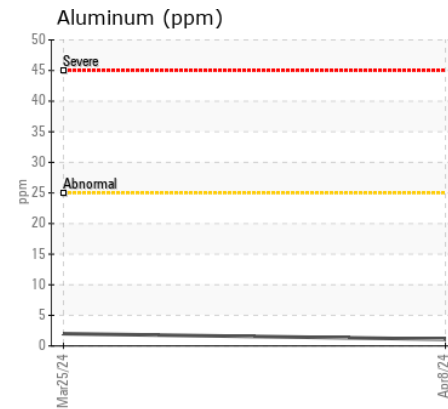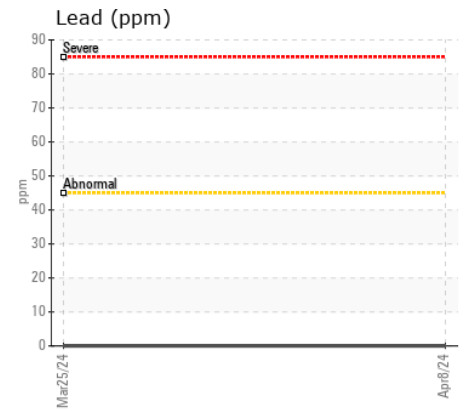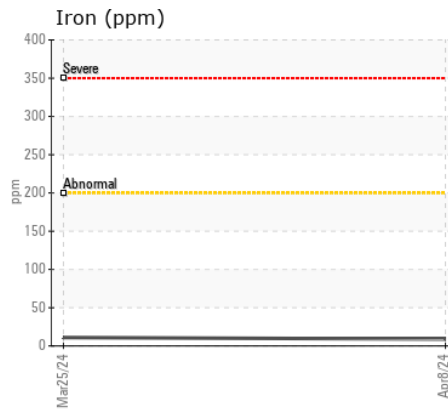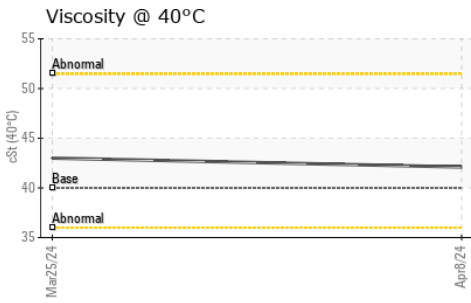

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : GFL0118317  
**Lab Number** : 02628250  
**Unique Number** : 5761382  
**Test Package** : MOB 1

**GFL Environmental - 743 - Montreal Est CD Processing**  
 10930 rue Sherbrooke  
 Montreal, QC  
 CA H1B 1B4  
 Contact: Patrick Beaulieu  
 patrick.beaulieu@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

T:  
F: