



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
811031
Component
1 Differential
Fluid
GEAR OIL SAE 75W90 (--- GAL)

RECOMMENDATION

Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0117067	GFL0110440	GFL0097422
Sample Date		Client Info		09 Apr 2024	26 Jan 2024	04 Oct 2023
Machine Age	hrs	Client Info		6610	6155	5537
Oil Age	hrs	Client Info		6610	6155	5297
Filter Age	hrs	Client Info		6610	6155	5297
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

Les taux d'usure de tous les composants sont normaux.

Iron	ppm	ASTM D5185(m)	>500	237	351	248
Chromium	ppm	ASTM D5185(m)	>10	2	3	2
Nickel	ppm	ASTM D5185(m)	>10	<1	<1	<1
Titanium	ppm	ASTM D5185(m)		<1	0	0
Silver	ppm	ASTM D5185(m)		0	0	<1
Aluminum	ppm	ASTM D5185(m)	>25	7	17	8
Lead	ppm	ASTM D5185(m)	>25	1	<1	2
Copper	ppm	ASTM D5185(m)	>100	69	2	77
Tin	ppm	ASTM D5185(m)	>10	<1	0	<1
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE

CONTAMINATION










Il n'y a aucun indice de contamination dans l'huile.

Silicon	ppm	ASTM D5185(m)	>75	65	81	74
Potassium	ppm	ASTM D5185(m)	>20	4	6	4
Water		WC Method	>.2	NEG	NEG	NEG
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	VLITE	LIGHT	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>.2	NEG	NEG	NEG

FLUID CONDITION

L'état de l'huile est acceptable pour la durée de service.

Sodium	ppm	ASTM D5185(m)		7	11	8
Boron	ppm	ASTM D5185(m)	400	173	169	206
Barium	ppm	ASTM D5185(m)	200	4	22	5
Molybdenum	ppm	ASTM D5185(m)	12	0	0	0
Manganese	ppm	ASTM D5185(m)		17	14	20
Magnesium	ppm	ASTM D5185(m)	12	4	7	3
Calcium	ppm	ASTM D5185(m)	150	10	23	10
Phosphorus	ppm	ASTM D5185(m)	1650	1176	1190	1326
Zinc	ppm	ASTM D5185(m)	125	19	24	20
Sulfur	ppm	ASTM D5185(m)	22500	20571	21664	22450
Visc @ 40°C	cSt	ASTM D7279(m)	109	92.6	99.7	89.7

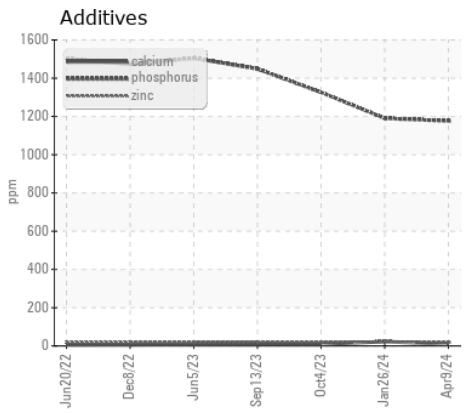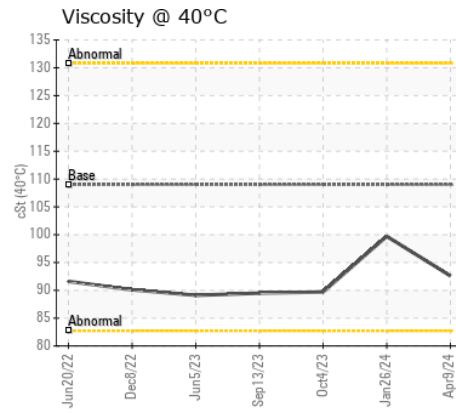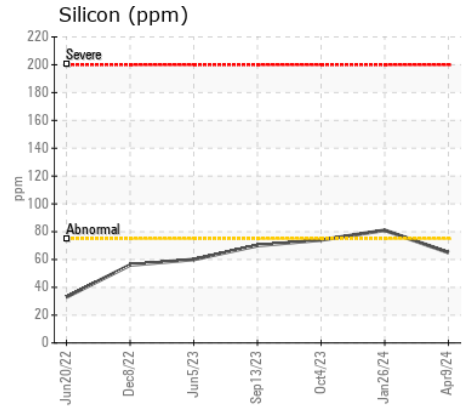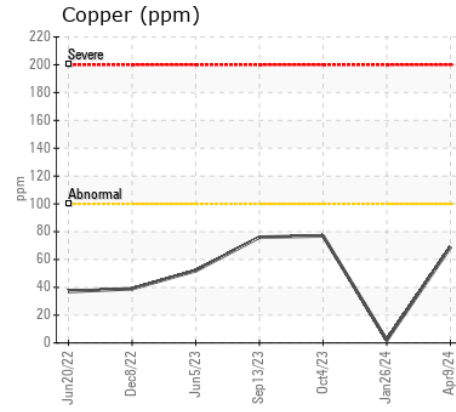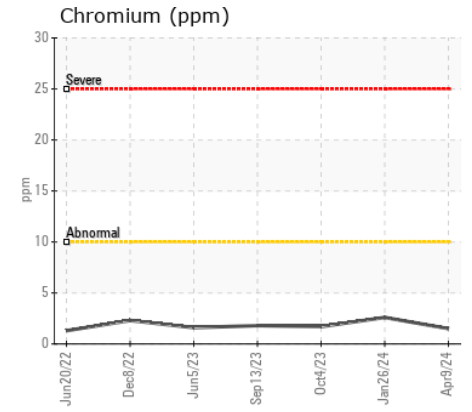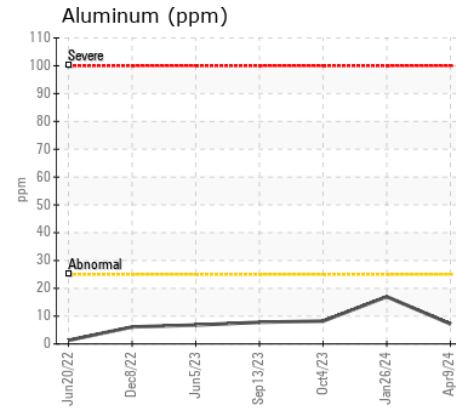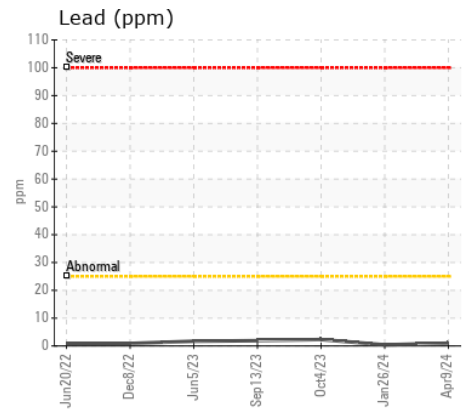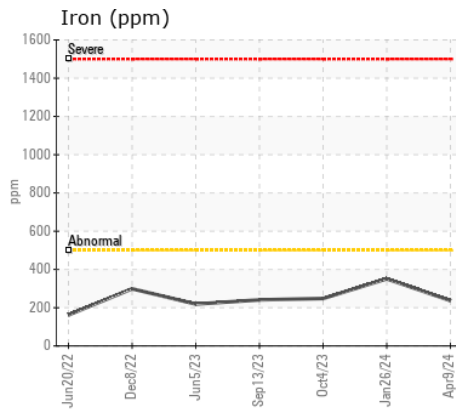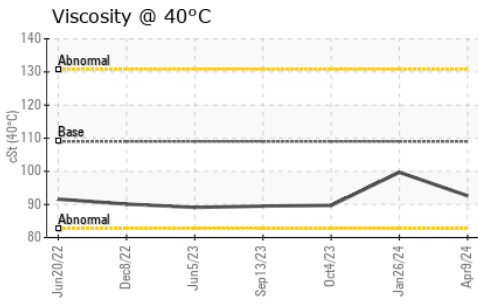

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0117067
Lab Number : 02628256
Unique Number : 5761388
Test Package : MOB 1
Received : 11 Apr 2024
Tested : 11 Apr 2024
Diagnosed : 11 Apr 2024 - Wes Davis

GFL Environmental - 732 - Beauce - Hauling - Solid Waste
 139, 181 Street,
 Beauceville, QC
 CA G5X 2S9
 Contact: Sandrine Duval
 sduval@matrec.ca
 T: (418)774-5275
 F: (418)774-5292

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.