



Machine Id
414004
Component
Transmission (Auto)
Fluid
DEXRON III (--- GAL)

RECOMMENDATION

Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition. Le fluide n'était pas spécifié, toutefois, une comparaison avec d'autres fluides indiqu que ce fluide est du (GENERIC) DEXRON III. Veuillez confirmer.

WEAR

Les taux d'usure de tous les composants sont normaux.











CONTAMINATION

Il n'y a aucun indice de contamination dans le fluide.

FLUID CONDITION

L'état de le fluide est acceptable pour la durée de service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PC0088261	---	---
Sample Date		Client Info		10 Apr 2024	---	---
Machine Age	kms	Client Info		17020	---	---
Oil Age	kms	Client Info		0	---	---
Filter Age	kms	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---
Iron	ppm	ASTM D5185(m)	>220	55	---	---
Chromium	ppm	ASTM D5185(m)	>2	0	---	---
Nickel	ppm	ASTM D5185(m)	>5	<1	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)	>5	0	---	---
Aluminum	ppm	ASTM D5185(m)	>75	12	---	---
Lead	ppm	ASTM D5185(m)	>95	2	---	---
Copper	ppm	ASTM D5185(m)	>60	11	---	---
Tin	ppm	ASTM D5185(m)	>10	2	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---
Silicon	ppm	ASTM D5185(m)	>25	4	---	---
Potassium	ppm	ASTM D5185(m)	>20	4	---	---
Water		WC Method	>0.1	NEG	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	VLITE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.1	NEG	---	---
Sodium	ppm	ASTM D5185(m)		4	---	---
Boron	ppm	ASTM D5185(m)		62	---	---
Barium	ppm	ASTM D5185(m)		<1	---	---
Molybdenum	ppm	ASTM D5185(m)		<1	---	---
Manganese	ppm	ASTM D5185(m)		2	---	---
Magnesium	ppm	ASTM D5185(m)		1	---	---
Calcium	ppm	ASTM D5185(m)		133	---	---
Phosphorus	ppm	ASTM D5185(m)		210	---	---
Zinc	ppm	ASTM D5185(m)		6	---	---
Sulfur	ppm	ASTM D5185(m)		1504	---	---
Visc @ 40°C	cSt	ASTM D7279(m)	26.0	32.3	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	5.5	6.5	---	---
Viscosity Index (VI)	Scale	ASTM D2270*	155	160	---	---

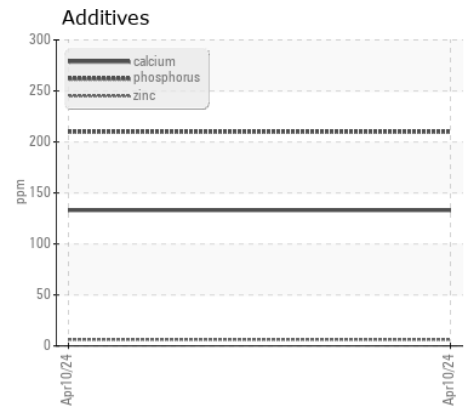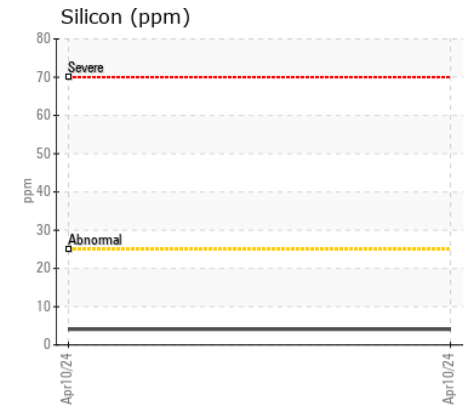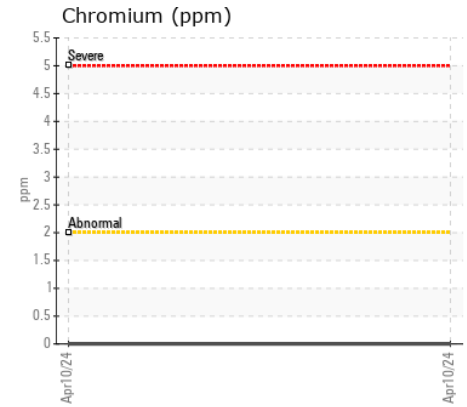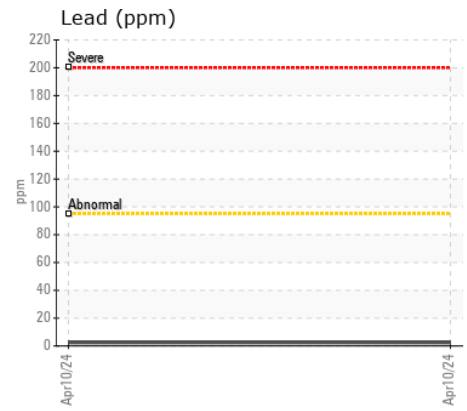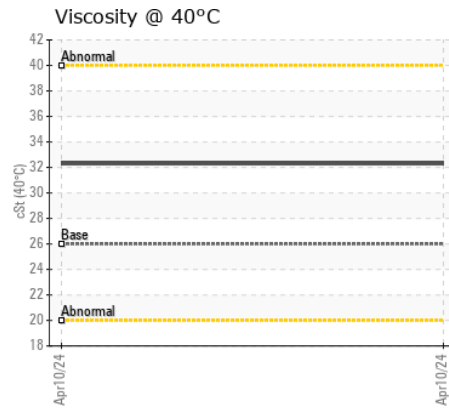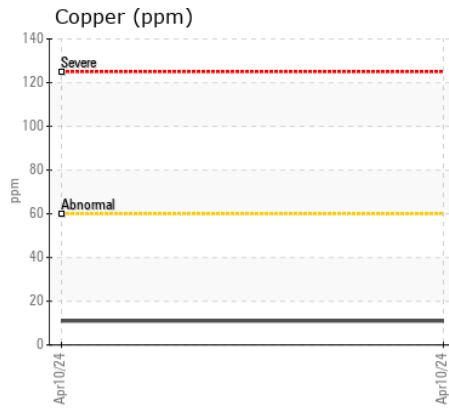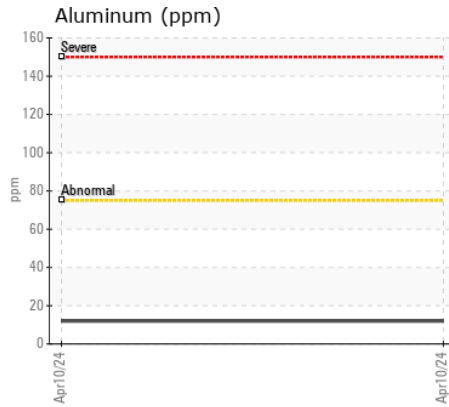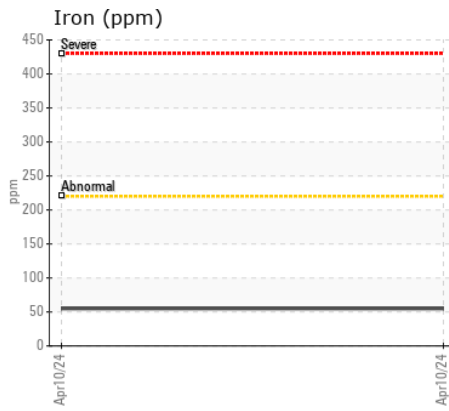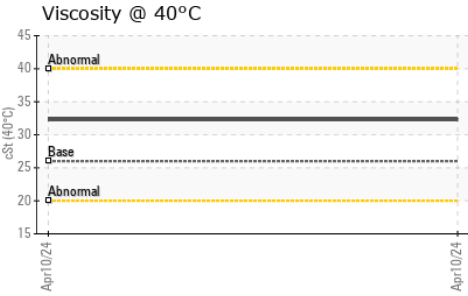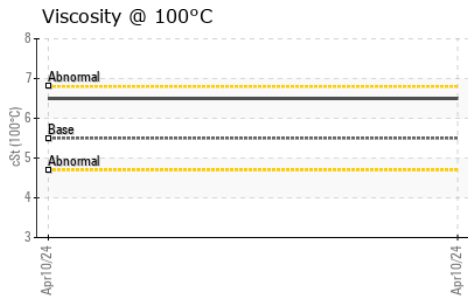

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0088261
Lab Number : 02628517
Unique Number : 5761649
Test Package : MOB 1 (Additional Tests: KV100, VI)
Received : 12 Apr 2024
Tested : 12 Apr 2024
Diagnosed : 12 Apr 2024 - Wes Davis

GFL Environmental - 737 - Quebec City Hauling
 6205 Boul. Wilfrid Hamel,
 Quebec City, QC
 CA G2E 5G8
 Contact: Dave Beaulieu
 davebeaulieu@matrec.ca

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
F: