

Area

CAPLAN

Machine Id

8320

Component

Front Center Transmission (Auto)

Fluid

PETRO CANADA DURADRIVE HD SYNTHETIC ATF (20 LTR)

RECOMMENDATION

Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition. Veuillez préciser la marque et le modèle du composant lors du prochain échantillon. (Customer Sample Comment:
Top Up Amount: 4 LTR)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0113513	---	---
Sample Date		Client Info		03 Apr 2024	---	---
Machine Age	hrs	Client Info		16326	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Oil Added	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR

Les taux d'usure de tous les composants sont normaux.

Iron	ppm	ASTM D5185(m)	>160	14	---	---
Chromium	ppm	ASTM D5185(m)	>5	0	---	---
Nickel	ppm	ASTM D5185(m)	>5	0	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)	>5	0	---	---
Aluminum	ppm	ASTM D5185(m)	>50	2	---	---
Lead	ppm	ASTM D5185(m)	>50	0	---	---
Copper	ppm	ASTM D5185(m)	>225	7	---	---
Tin	ppm	ASTM D5185(m)	>10	0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---

CONTAMINATION










Il n'y a aucun indice de contamination dans le fluide.

Silicon	ppm	ASTM D5185(m)	>20	5	---	---
Potassium	ppm	ASTM D5185(m)	>20	<1	---	---
Water		WC Method	>0.1	NEG	---	---
Silt	scalar	Visual*	NONE	VLITE	---	---
Debris	scalar	Visual*	NONE	VLITE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.1	NEG	---	---

FLUID CONDITION

L'état de le fluide est acceptable pour la durée de service.

Sodium	ppm	ASTM D5185(m)		17	---	---
Boron	ppm	ASTM D5185(m)		67	---	---
Barium	ppm	ASTM D5185(m)		0	---	---
Molybdenum	ppm	ASTM D5185(m)		0	---	---
Manganese	ppm	ASTM D5185(m)		0	---	---
Magnesium	ppm	ASTM D5185(m)		<1	---	---
Calcium	ppm	ASTM D5185(m)		128	---	---
Phosphorus	ppm	ASTM D5185(m)		214	---	---
Zinc	ppm	ASTM D5185(m)		4	---	---
Sulfur	ppm	ASTM D5185(m)		1462	---	---
Visc @ 40°C	cSt	ASTM D7279(m)	36.1	33.2	---	---

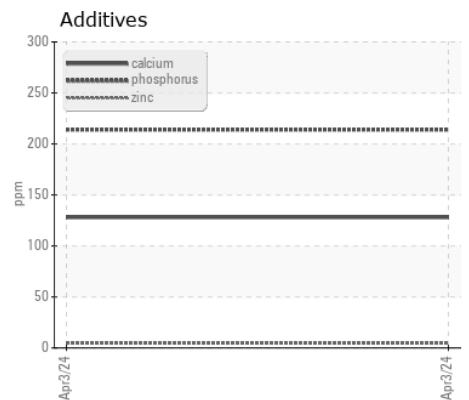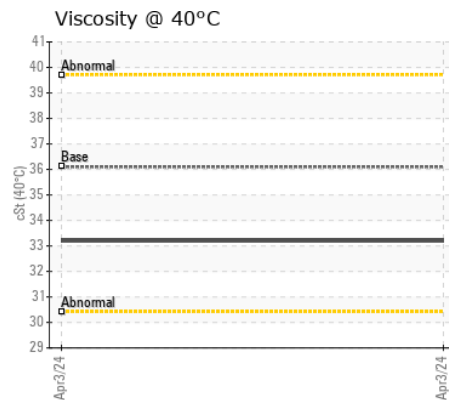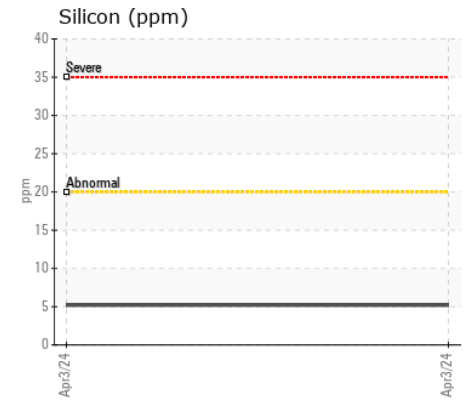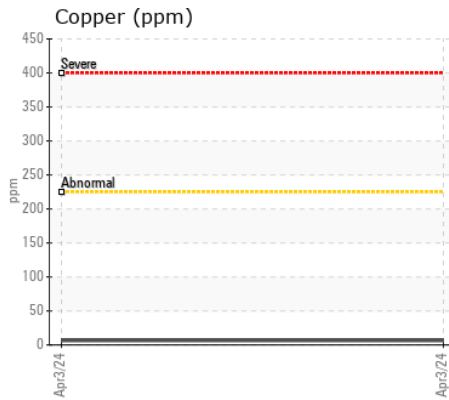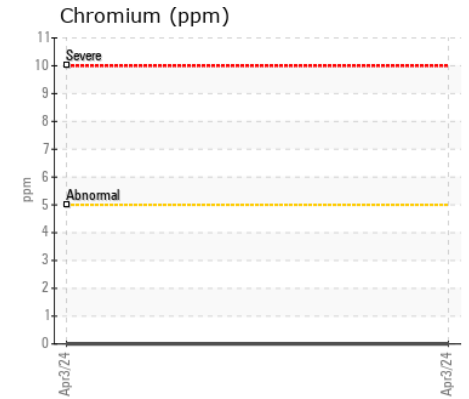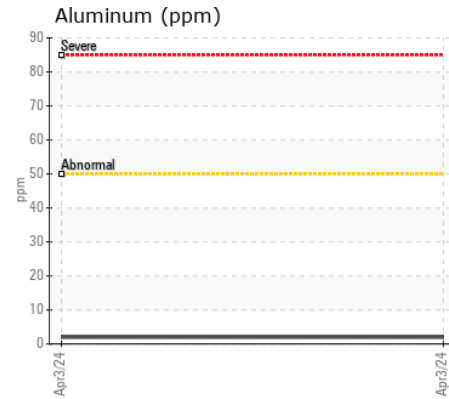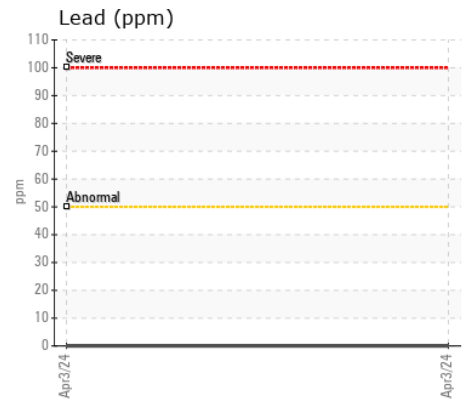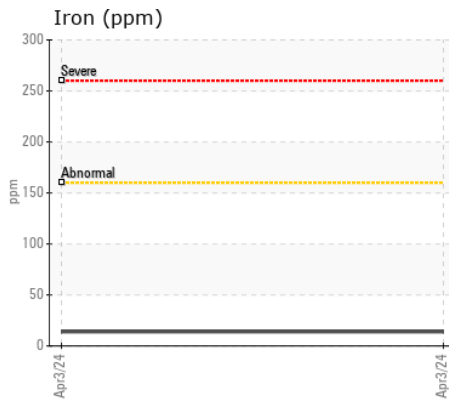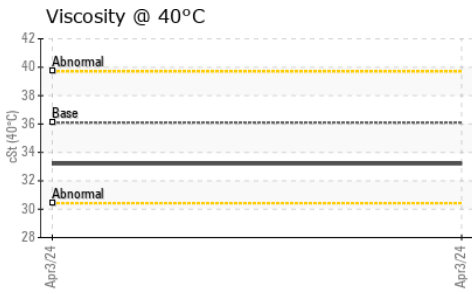

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0113513 **Received** : 12 Apr 2024
Lab Number : 02628520 **Tested** : 12 Apr 2024
Unique Number : 5761652 **Diagnosed** : 12 Apr 2024 - Kevin Marson
Test Package : MOB 1

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

Matrec - 791 - Rimouski
 350 Avenue de L'Industrie
 Rimouski, QC
 CA G5M 1W4
 Contact: Vincent Maltais
 info@foretsstar.com
 T: 4(18)388-2626
 F: (418)388-2038