



WEAR	<b>ABNORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**OR1043**  
Component  
**Front Differential**  
Fluid  
**TDTO FLUID SAE 20 (--- GAL)**

**RECOMMENDATION**

Nous vous recommandons de vidanger l'huile de ce composant si vous ne l'avez pas déjà fait. Nous vous recommandons d'échantillonner de nouveau dès que possible afin de contrôler la situation. Le fluide n'était pas spécifié, toutefois, une comparaison avec d'autres fluides indique que ce fluide est du (GENERIC) TDTO FLUID SAE 20. Veuillez confirmer.

**WEAR**

Usure des engrenages.











**CONTAMINATION**

Il n'y a aucun indice de contamination dans l'huile.

**FLUID CONDITION**

L'huile n'est plus en état de service en raison d'une usure anormale et/ou sévère.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>GFL0093667</b>	---	---
Sample Date		Client Info		<b>09 Apr 2024</b>	---	---
Machine Age	hrs	Client Info		<b>12992</b>	---	---
Oil Age	hrs	Client Info		<b>0</b>	---	---
Filter Age	hrs	Client Info		<b>0</b>	---	---
Oil Changed		Client Info		<b>N/A</b>	---	---
Filter Changed		Client Info		<b>N/A</b>	---	---
Sample Status				<b>ABNORMAL</b>	---	---
Iron	ppm	ASTM D5185(m)	>500	<b>471</b>	---	---
Chromium	ppm	ASTM D5185(m)	>3	<b>3</b>	---	---
Nickel	ppm	ASTM D5185(m)	>3	<b>▲ 4</b>	---	---
Titanium	ppm	ASTM D5185(m)	>2	<b>0</b>	---	---
Silver	ppm	ASTM D5185(m)	>2	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185(m)	>30	<b>1</b>	---	---
Lead	ppm	ASTM D5185(m)	>13	<b>0</b>	---	---
Copper	ppm	ASTM D5185(m)	>103	<b>3</b>	---	---
Tin	ppm	ASTM D5185(m)	>5	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	---	---
White Metal	scalar	Visual*	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	---	---
Silicon	ppm	ASTM D5185(m)	>100	<b>9</b>	---	---
Potassium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	---	---
Water		WC Method	>.2	<b>NEG</b>	---	---
Silt	scalar	Visual*	NONE	<b>NONE</b>	---	---
Debris	scalar	Visual*	NONE	<b>VLITE</b>	---	---
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	---	---
Appearance	scalar	Visual*	NORML	<b>NORML</b>	---	---
Odor	scalar	Visual*	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	Visual*	>.2	<b>NEG</b>	---	---
Sodium	ppm	ASTM D5185(m)		<b>3</b>	---	---
Boron	ppm	ASTM D5185(m)	37	<b>24</b>	---	---
Barium	ppm	ASTM D5185(m)	7	<b>3</b>	---	---
Molybdenum	ppm	ASTM D5185(m)	5	<b>5</b>	---	---
Manganese	ppm	ASTM D5185(m)		<b>5</b>	---	---
Magnesium	ppm	ASTM D5185(m)	40	<b>11</b>	---	---
Calcium	ppm	ASTM D5185(m)	2650	<b>2545</b>	---	---
Phosphorus	ppm	ASTM D5185(m)	1050	<b>906</b>	---	---
Zinc	ppm	ASTM D5185(m)	1075	<b>1108</b>	---	---
Sulfur	ppm	ASTM D5185(m)	5750	<b>5900</b>	---	---
Visc @ 40°C	cSt	ASTM D7279(m)	60	<b>62.5</b>	---	---

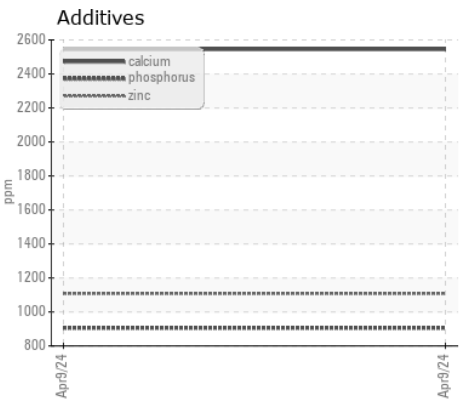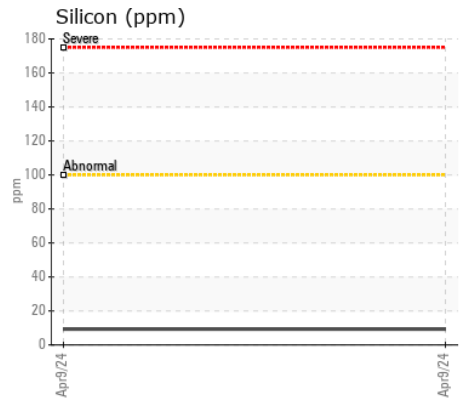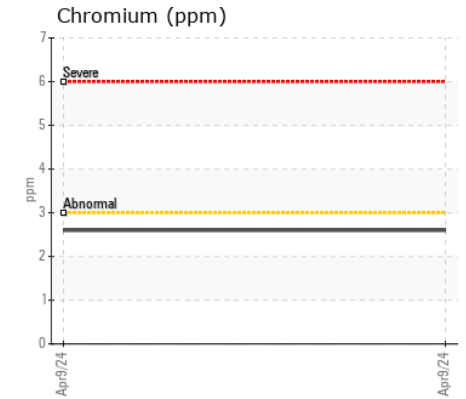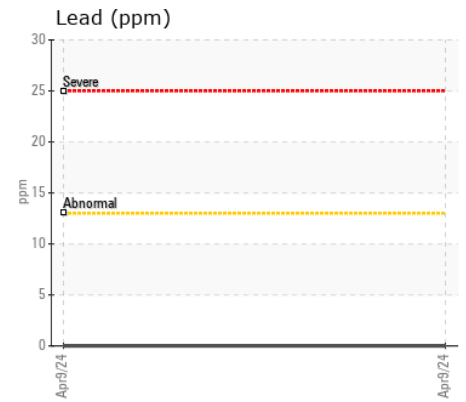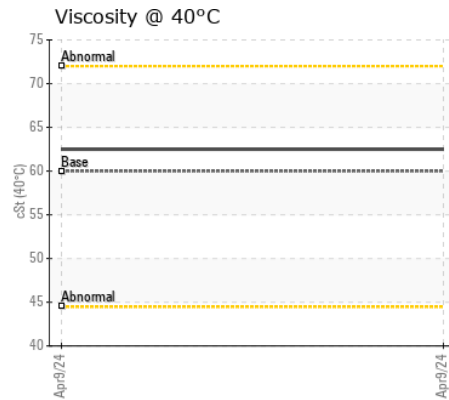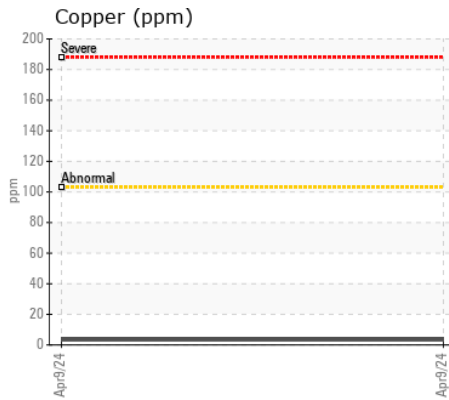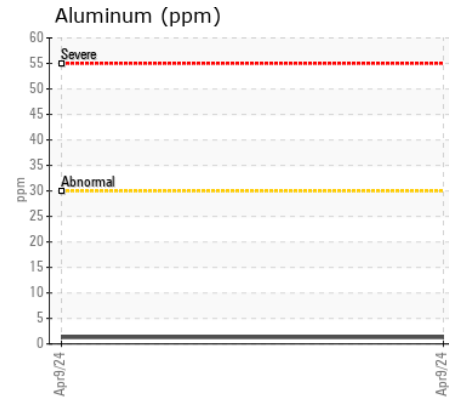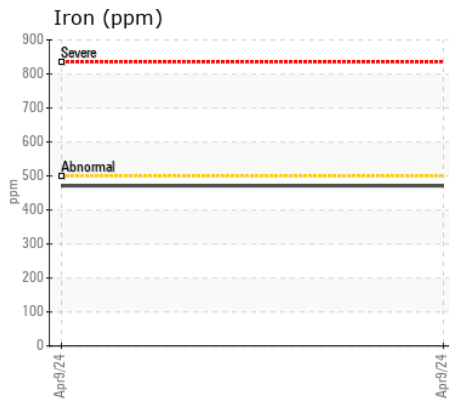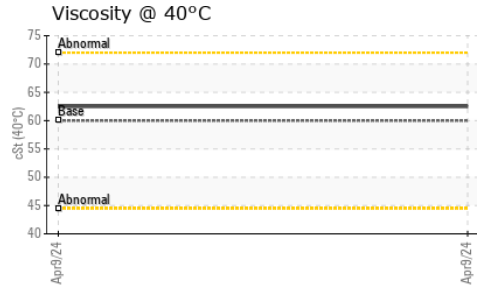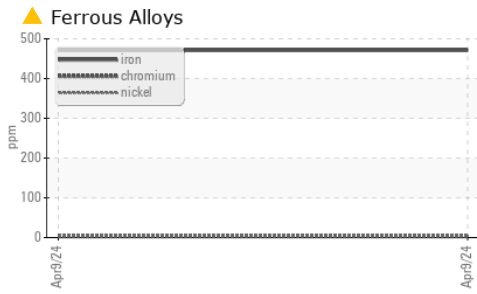

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 **GFL Environmental - 769 - Drummondville CD**  
**Sample No.** : GFL0093667 **Received** : 12 Apr 2024 1005 rue Rhea  
**Lab Number** : 02628523 **Tested** : 12 Apr 2024 Drummondville, QC  
**Unique Number** : 5761655 **Diagnosed** : 12 Apr 2024 - Kevin Marson CA J2B 8A9  
**Test Package** : MOB 1 **Contact**: Service Manager

To discuss this sample report, contact Customer Service at 1-800-268-2131.

Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.

Validity of results and interpretation are based on the sample and information as supplied.

T:  
F: