



LIEBHERR

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
145463-1218

Component
Splitter Box

Fluid
PETRO CANADA TRAXON SYNTHETIC 75W90 (--- GAL)

RECOMMENDATION

Confirm the source of the lubricant being utilized for top-up/fill.
Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH0287868	LH0260012	---
Sample Date		Client Info		08 Apr 2024	18 May 2023	---
Machine Age	hrs	Client Info		1500	470	---
Oil Age	hrs	Client Info		0	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		N/A	N/A	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	19	10	---
Chromium	ppm	ASTM D5185(m)	>5	0	0	---
Nickel	ppm	ASTM D5185(m)	>5	0	0	---
Titanium	ppm	ASTM D5185(m)		0	0	---
Silver	ppm	ASTM D5185(m)		0	0	---
Aluminum	ppm	ASTM D5185(m)	>20	<1	0	---
Lead	ppm	ASTM D5185(m)	>30	0	0	---
Copper	ppm	ASTM D5185(m)	>20	2	<1	---
Tin	ppm	ASTM D5185(m)	>10	0	0	---
Vanadium	ppm	ASTM D5185(m)		0	0	---
White Metal	scalar	Visual*	NONE	NONE	NONE	---
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	---

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>30	<1	<1	---
Potassium	ppm	ASTM D5185(m)	>20	1	<1	---
Water		WC Method	>0.1	NEG	NEG	---
Silt	scalar	Visual*	NONE	NONE	NONE	---
Debris	scalar	Visual*	NONE	NONE	NONE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	NORML	---
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	---

FLUID CONDITION

Additive levels indicate the addition of a different brand, or type of oil.
The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)	>25	3	3	---
Boron	ppm	ASTM D5185(m)	328	11	2	---
Barium	ppm	ASTM D5185(m)	1	<1	0	---
Molybdenum	ppm	ASTM D5185(m)		0	0	---
Manganese	ppm	ASTM D5185(m)		2	2	---
Magnesium	ppm	ASTM D5185(m)	1	8	2	---
Calcium	ppm	ASTM D5185(m)	7	18	10	---
Phosphorus	ppm	ASTM D5185(m)	1145	1431	1664	---
Zinc	ppm	ASTM D5185(m)	3	34	11	---
Sulfur	ppm	ASTM D5185(m)	17909	22879	25021	---
Visc @ 40°C	cSt	ASTM D7279(m)	99.6	173	190	---

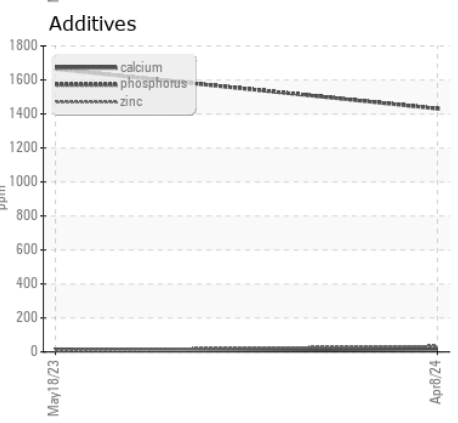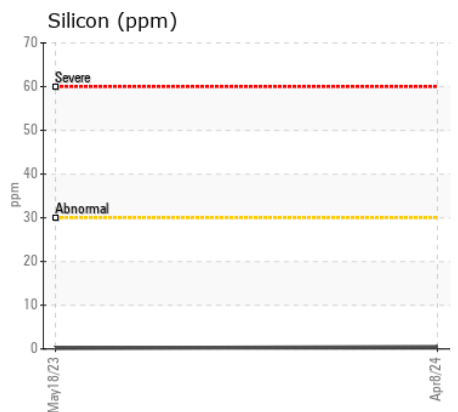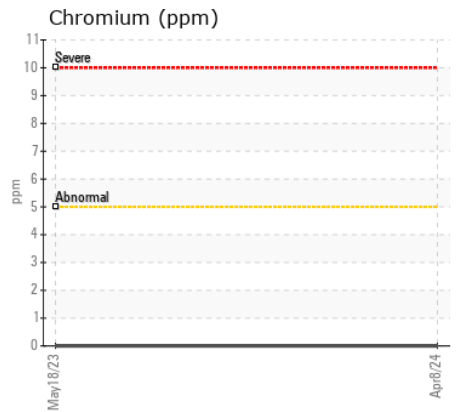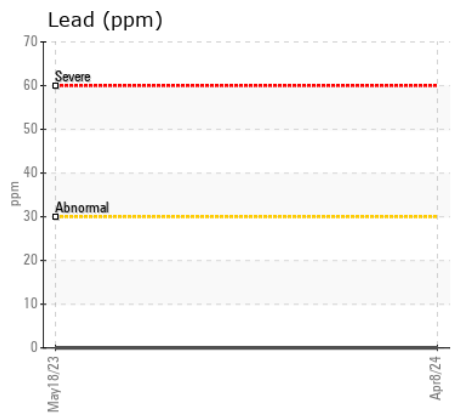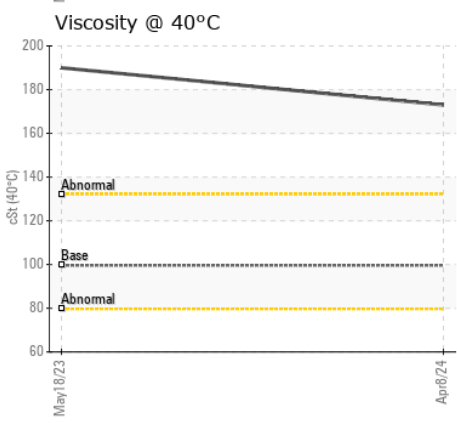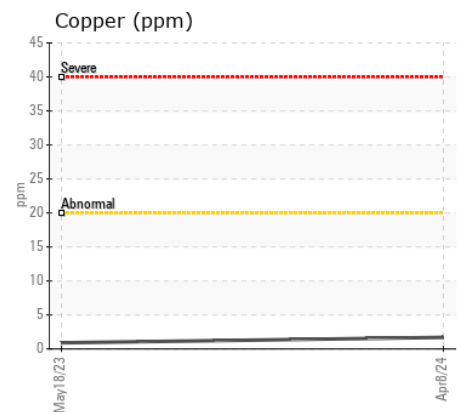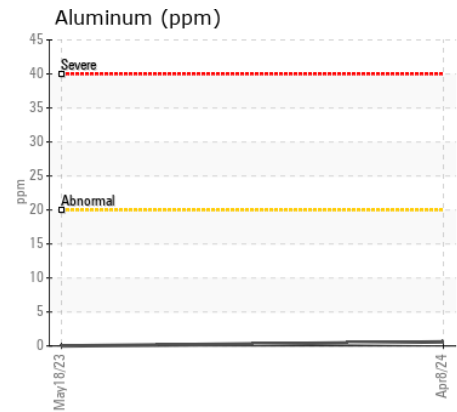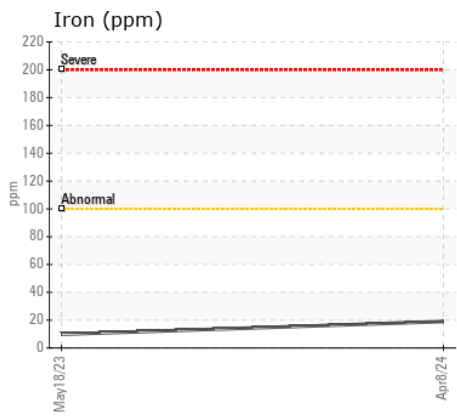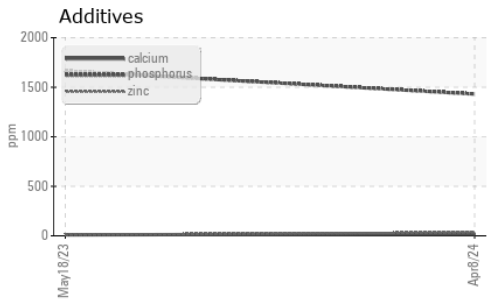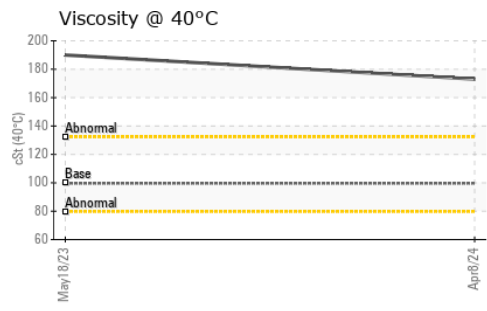

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : LH0287868 **Received** : 12 Apr 2024
Lab Number : 02628539 **Tested** : 12 Apr 2024
Unique Number : 5761671 **Diagnosed** : 12 Apr 2024 - Wes Davis
Test Package : MOB 1

American Iron and Metal
 145 GATEWAY ST.
 SAINT JOHN, NB
 CA E2M 5S8
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
F: