



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
JAMES BARROW [48515]
 Machine Id
2006013718
 Component
Starboard Main Engine
 Fluid
SAE 15W40 (15 LTR)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VPA021039	---	---
Sample Date		Client Info		11 Apr 2024	---	---
Machine Age	hrs	Client Info		935	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>75	12	---	---
Chromium	ppm	ASTM D5185(m)	>8	0	---	---
Nickel	ppm	ASTM D5185(m)	>2	<1	---	---
Titanium	ppm	ASTM D5185(m)	>3	<1	---	---
Silver	ppm	ASTM D5185(m)	>2	0	---	---
Aluminum	ppm	ASTM D5185(m)	>15	2	---	---
Lead	ppm	ASTM D5185(m)	>18	0	---	---
Copper	ppm	ASTM D5185(m)	>80	2	---	---
Tin	ppm	ASTM D5185(m)	>14	0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>20	4	---	---
Potassium	ppm	ASTM D5185(m)	>20	<1	---	---
Fuel		WC Method	>4.0	<1.0	---	---
Water		WC Method	>0.1	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	ASTM D7844*		0	---	---
Nitration	Abs/cm	ASTM D7624*	>20	8.3	---	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	20.5	---	---
Emulsified Water	scalar	Visual*	>0.1	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)	>57	3	---	---
Boron	ppm	ASTM D5185(m)		41	---	---
Barium	ppm	ASTM D5185(m)		0	---	---
Molybdenum	ppm	ASTM D5185(m)		46	---	---
Manganese	ppm	ASTM D5185(m)		<1	---	---
Magnesium	ppm	ASTM D5185(m)		655	---	---
Calcium	ppm	ASTM D5185(m)		1369	---	---
Phosphorus	ppm	ASTM D5185(m)		751	---	---
Zinc	ppm	ASTM D5185(m)		861	---	---
Sulfur	ppm	ASTM D5185(m)		2150	---	---
Oxidation	Abs/.1mm	ASTM D7414*	>25	17.3	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	14.5	14.2	---	---

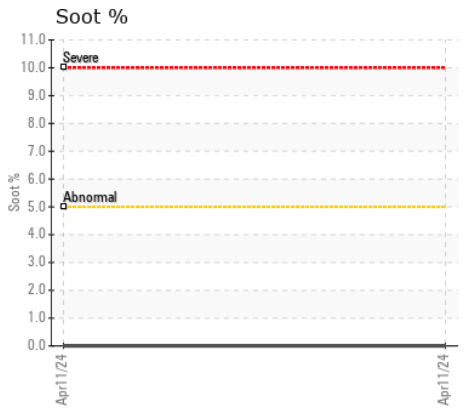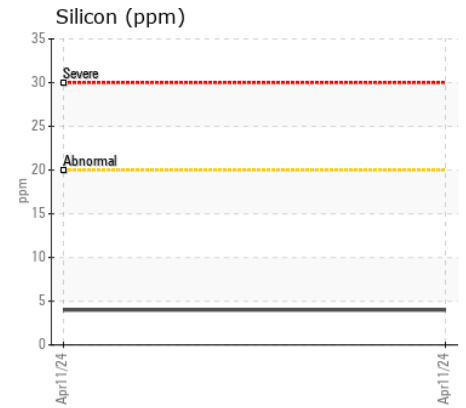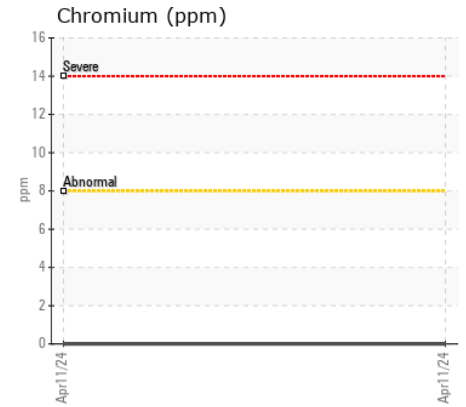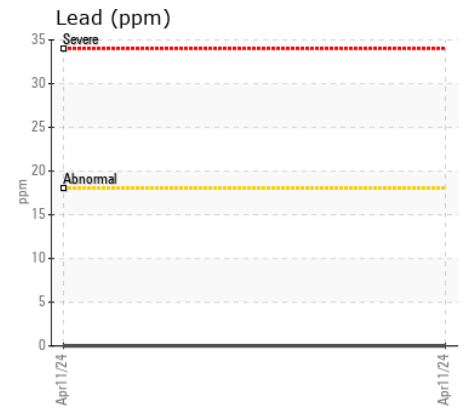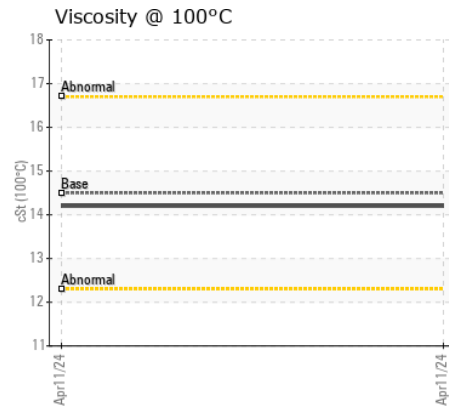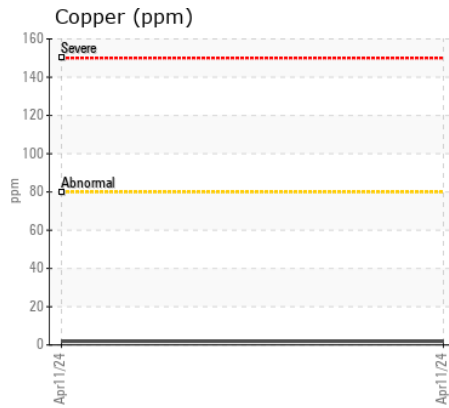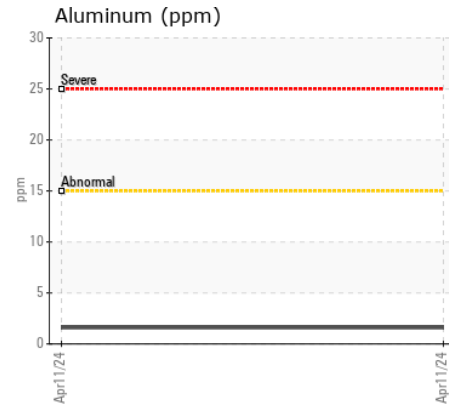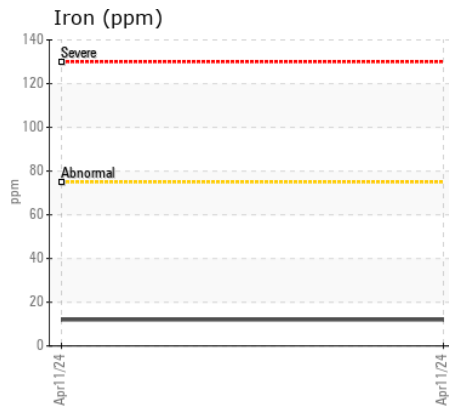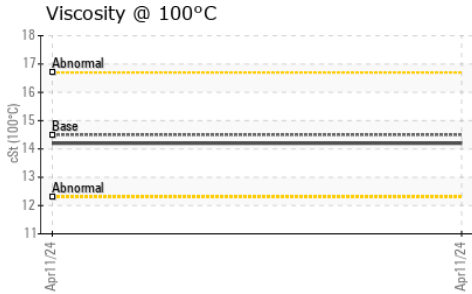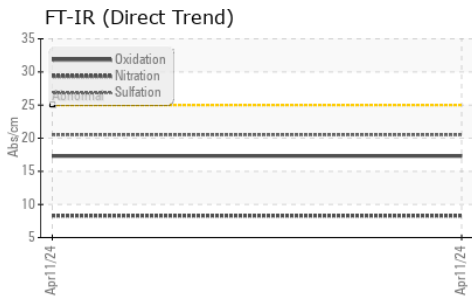

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : VPA021039
Lab Number : 02628693
Unique Number : 5761825
Test Package : MOB 1

Received : 15 Apr 2024
Tested : 15 Apr 2024
Diagnosed : 15 Apr 2024 - Kevin Marson

PECKS MARINE
 505 THOUSAND ISLANDS PKWY
 LANDSDOWNE, ON
 CA K0E 1L0
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
F: