



# OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id  
**NEW HOLLAND 8970 NOUNITWC0900943**  
 Component  
**Diesel Engine**  
 Fluid  
**KLONDIKE HEAVY DUTY 15W40 (--- GAL)**

## RECOMMENDATION

Confirm the source of the lubricant being utilized for top-up/fill.  
 Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0900943	---	---
Sample Date		Client Info		11 Apr 2024	---	---
Machine Age	hrs	Client Info		7910	---	---
Oil Age	hrs	Client Info		180	---	---
Filter Age	hrs	Client Info		180	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	7	---	---
Chromium	ppm	ASTM D5185(m)	>20	<1	---	---
Nickel	ppm	ASTM D5185(m)	>4	0	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)	>3	0	---	---
Aluminum	ppm	ASTM D5185(m)	>20	1	---	---
Lead	ppm	ASTM D5185(m)	>40	3	---	---
Copper	ppm	ASTM D5185(m)	>330	<1	---	---
Tin	ppm	ASTM D5185(m)	>15	0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---

## CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	2	---	---
Potassium	ppm	ASTM D5185(m)	>20	1	---	---
Fuel		WC Method	>5	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	ASTM D7844*	>3	0	---	---
Nitration	Abs/cm	ASTM D7624*	>20	8.7	---	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	19.8	---	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---

## FLUID CONDITION

Additive levels indicate the addition of a different brand, or type of oil.  
 The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		2	---	---
Boron	ppm	ASTM D5185(m)	70	22	---	---
Barium	ppm	ASTM D5185(m)		0	---	---
Molybdenum	ppm	ASTM D5185(m)		61	---	---
Manganese	ppm	ASTM D5185(m)		0	---	---
Magnesium	ppm	ASTM D5185(m)	50	851	---	---
Calcium	ppm	ASTM D5185(m)	2000	1289	---	---
Phosphorus	ppm	ASTM D5185(m)	1000	1023	---	---
Zinc	ppm	ASTM D5185(m)	1100	1210	---	---
Sulfur	ppm	ASTM D5185(m)	3400	2643	---	---
Oxidation	Abs/.1mm	ASTM D7414*	>25	16.3	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	14.8	14.7	---	---

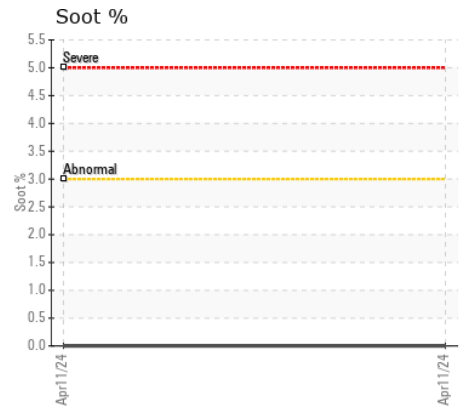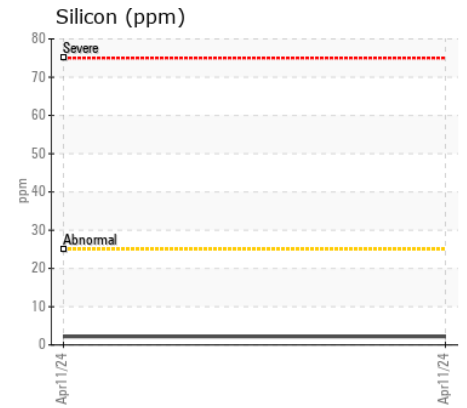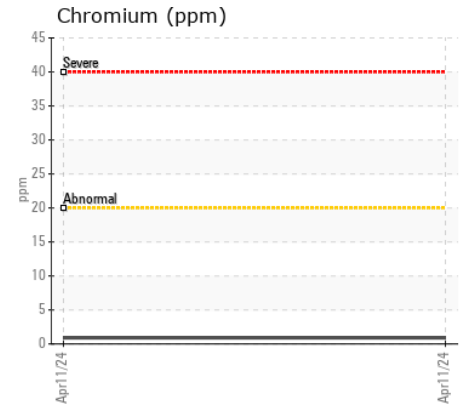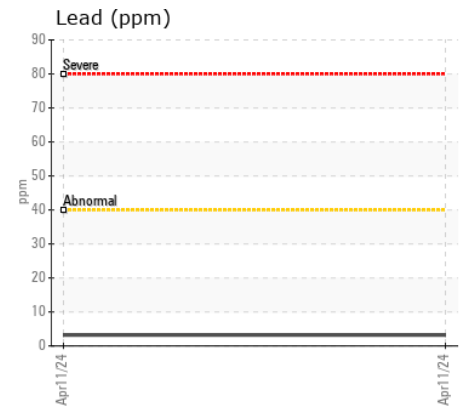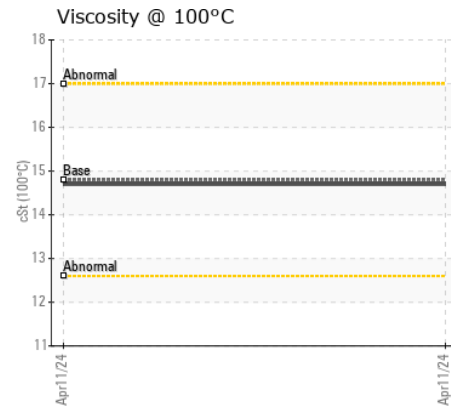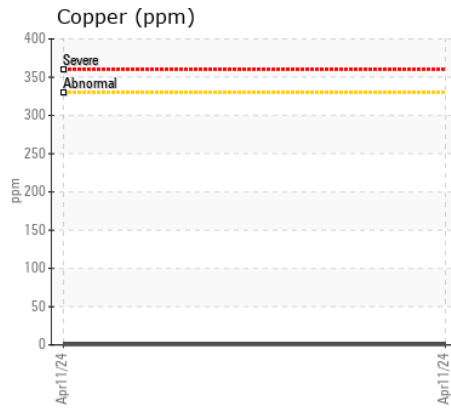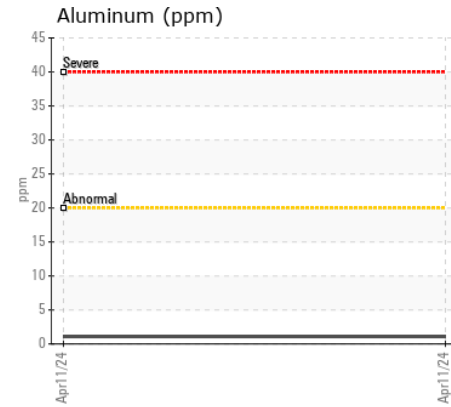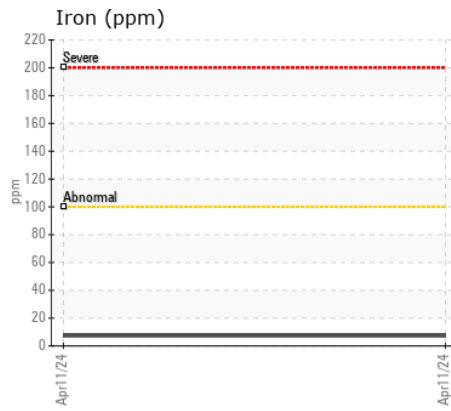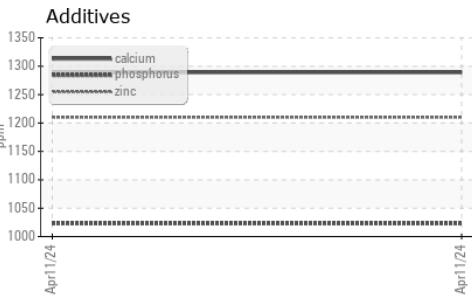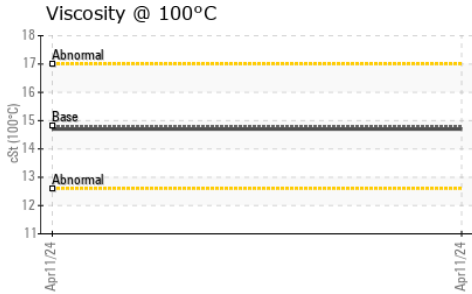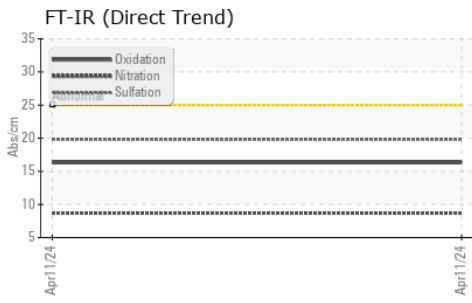

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0900943 **Received** : 15 Apr 2024  
**Lab Number** : 02628744 **Tested** : 16 Apr 2024  
**Unique Number** : 5761876 **Diagnosed** : 16 Apr 2024 - Kevin Marson  
**Test Package** : MOB 1

**ED REEB FARMS INC.**  
 R.R.#3., 648 SOUTH MIDDLE RD  
 ESSEX, ON  
 CA N8M 2X7  
 Contact: Ed Reeb  
 ecreeb@mnsi.net  
 T: (519)723-4601  
 F: (519)723-4601

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.