



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
8276
Component
Natural Gas Engine
Fluid
NOT GIVEN (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0118280	GFL0111116	GFL0103082
Sample Date		Client Info		08 Apr 2024	13 Mar 2024	19 Dec 2023
Machine Age	kms	Client Info		166007	165239	161487
Oil Age	kms	Client Info		16582	0	0
Filter Age	kms	Client Info		16582	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>50	12	11	10
Chromium	ppm	ASTM D5185(m)	>5	<1	1	<1
Nickel	ppm	ASTM D5185(m)	>4	<1	<1	<1
Titanium	ppm	ASTM D5185(m)	>5	0	0	0
Silver	ppm	ASTM D5185(m)	>3	0	0	0
Aluminum	ppm	ASTM D5185(m)	>25	1	2	2
Lead	ppm	ASTM D5185(m)	>40	0	<1	<1
Copper	ppm	ASTM D5185(m)	>150	<1	<1	<1
Tin	ppm	ASTM D5185(m)	>4	0	0	<1
Vanadium	ppm	ASTM D5185(m)		0	0	0

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	5	3	3
Potassium	ppm	ASTM D5185(m)	>20	<1	2	1
Water		WC Method	>0.1	NEG	NEG	NEG
Soot %	%	ASTM D7844*		0	0	0
Nitration	Abs/cm	ASTM D7624*	>20	8.1	11.5	11.1
Sulfation	Abs/.1mm	ASTM D7415*	>30	19.7	22.6	21.5
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		6	7	8
Boron	ppm	ASTM D5185(m)		32	11	12
Barium	ppm	ASTM D5185(m)		0	0	0
Molybdenum	ppm	ASTM D5185(m)		51	54	53
Manganese	ppm	ASTM D5185(m)		<1	0	0
Magnesium	ppm	ASTM D5185(m)		575	600	546
Calcium	ppm	ASTM D5185(m)		1556	1672	1645
Phosphorus	ppm	ASTM D5185(m)		740	727	712
Zinc	ppm	ASTM D5185(m)		883	960	905
Sulfur	ppm	ASTM D5185(m)		2011	2137	2094
Oxidation	Abs/.1mm	ASTM D7414*	>25	16.2	18.8	18.1
Visc @ 100°C	cSt	ASTM D7279(m)		14.3	15.0	14.8

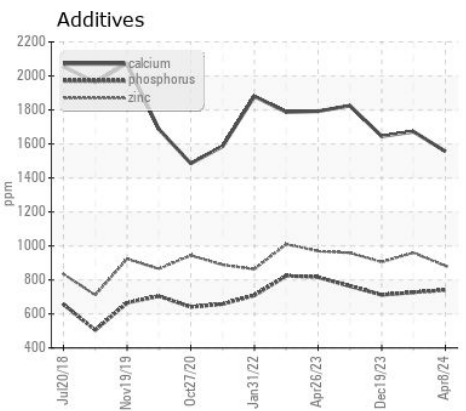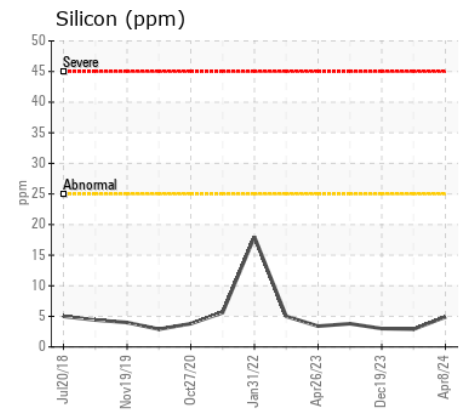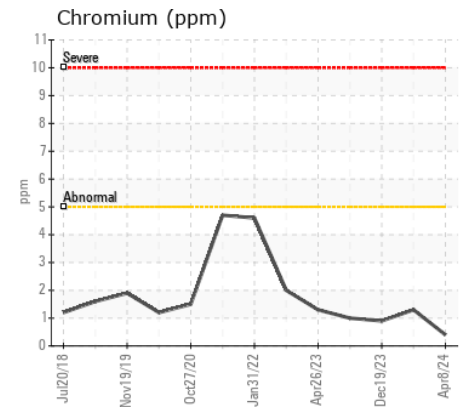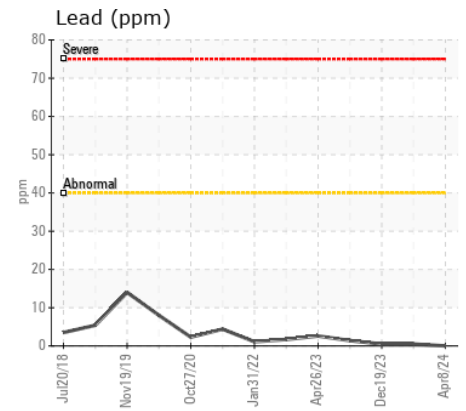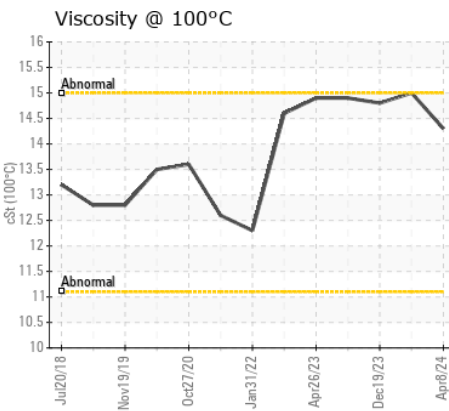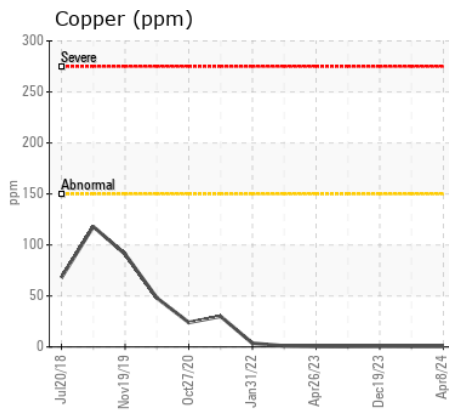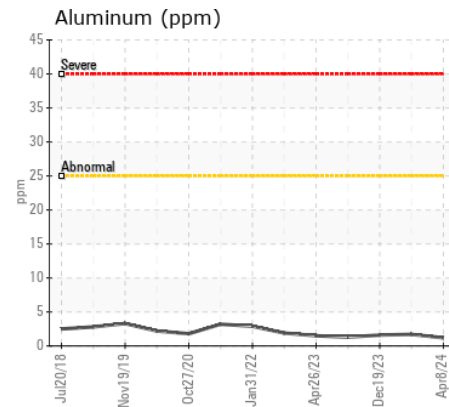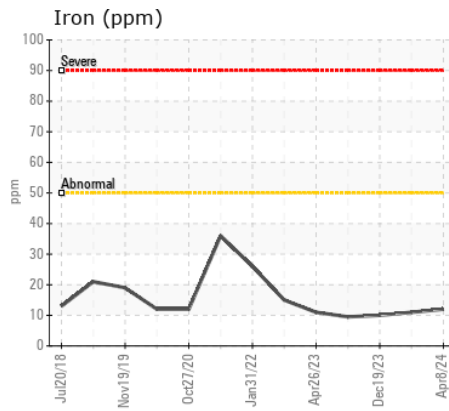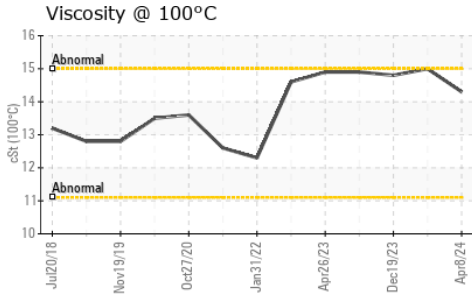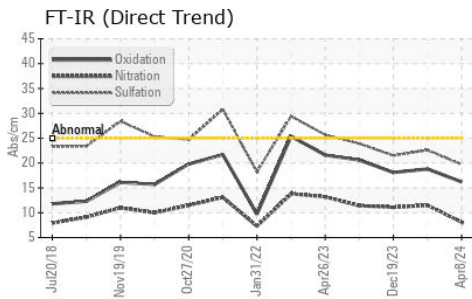

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0118280
Lab Number : 02628761
Unique Number : 5761893
Test Package : MOB 1

GFL Environmental - 225 - COT(D2)
 20 Brydon Drive
 Etobicoke, ON
 CA M9W 5R6
 Contact: Rick Philip
 rphilip@gflenv.com
 T: (416)745-8080
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.