



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	ABNORMAL
FLUID CONDITION	ATTENTION

Machine Id
CUMMINS 178
 Component
Rear Diesel Engine
 Fluid
ESSO XD-3 EXTRA 15W40 (--- GAL)

RECOMMENDATION

Check for low coolant level. The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0889001	WC0889119	WC0889179
Sample Date		Client Info		08 Apr 2024	21 Feb 2024	27 Dec 2023
Machine Age	kms	Client Info		0	0	0
Oil Age	kms	Client Info		8972	0	9832
Filter Age	kms	Client Info		8972	0	9832
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				ABNORMAL	NORMAL	ABNORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>90	14	13	19
Chromium	ppm	ASTM D5185(m)	>20	<1	<1	<1
Nickel	ppm	ASTM D5185(m)	>2	<1	<1	<1
Titanium	ppm	ASTM D5185(m)	>2	0	0	0
Silver	ppm	ASTM D5185(m)	>2	0	0	0
Aluminum	ppm	ASTM D5185(m)	>20	2	2	3
Lead	ppm	ASTM D5185(m)	>40	0	<1	0
Copper	ppm	ASTM D5185(m)	>330	<1	<1	1
Tin	ppm	ASTM D5185(m)	>15	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0

CONTAMINATION












Water treatment chemicals present, indicating slow coolant leak. Test for glycol is negative.

Silicon	ppm	ASTM D5185(m)	>25	5	4	6
Potassium	ppm	ASTM D5185(m)	>20	▲ 57	24	▲ 74
Fuel		WC Method	>3.0	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol	%	ASTM D7922*		0.0	0.0	0.0
Soot %	%	ASTM D7844*	>6	0.4	0.3	0.3
Nitration	Abs/cm	ASTM D7624*	>20	9.7	9.2	8.9
Sulfation	Abs/.1mm	ASTM D7415*	>30	24.3	23.3	22.6
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service (see recommendation).

Sodium	ppm	ASTM D5185(m)	>192	● 194	77	● 291
Boron	ppm	ASTM D5185(m)		97	93	83
Barium	ppm	ASTM D5185(m)		0	0	0
Molybdenum	ppm	ASTM D5185(m)		<1	1	<1
Manganese	ppm	ASTM D5185(m)		0	0	0
Magnesium	ppm	ASTM D5185(m)		17	22	20
Calcium	ppm	ASTM D5185(m)	3780	2215	2212	2064
Phosphorus	ppm	ASTM D5185(m)	1370	957	966	976
Zinc	ppm	ASTM D5185(m)	1500	1162	1139	1149
Sulfur	ppm	ASTM D5185(m)	3800	2826	2996	3168
Oxidation	Abs/.1mm	ASTM D7414*	>25	20.2	19.3	18.3
Visc @ 100°C	cSt	ASTM D7279(m)	15.4	14.1	14.2	14.1

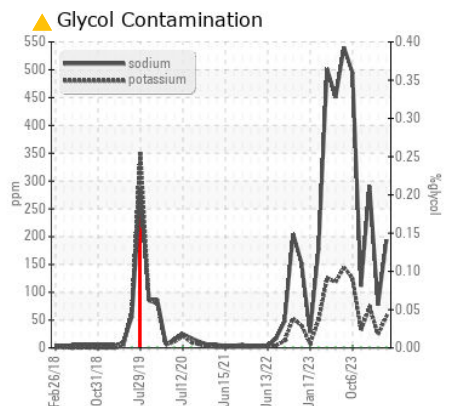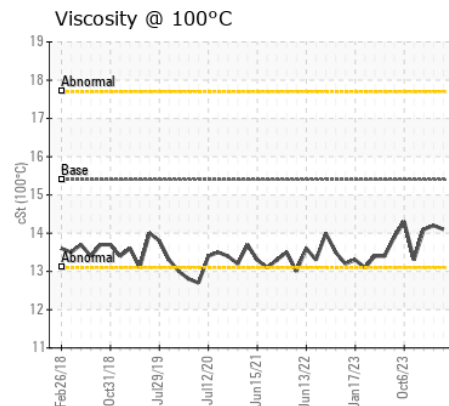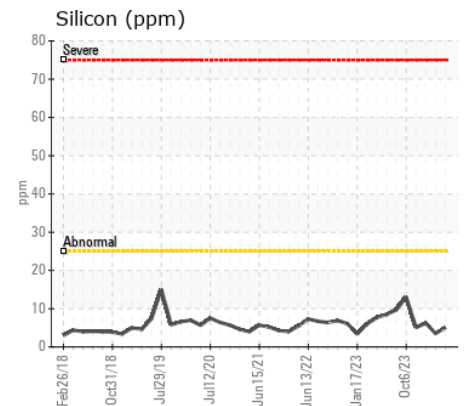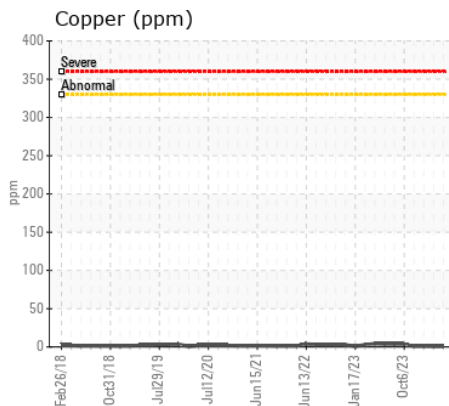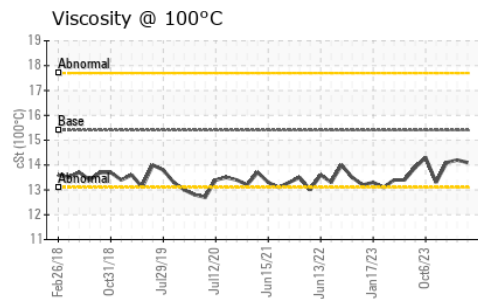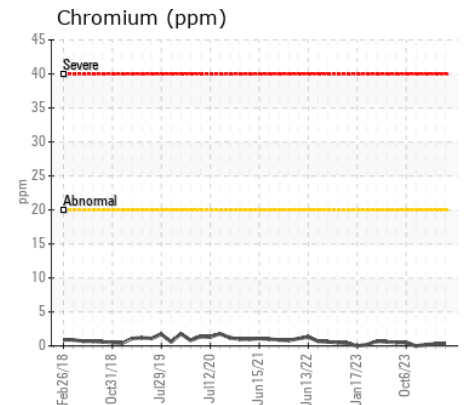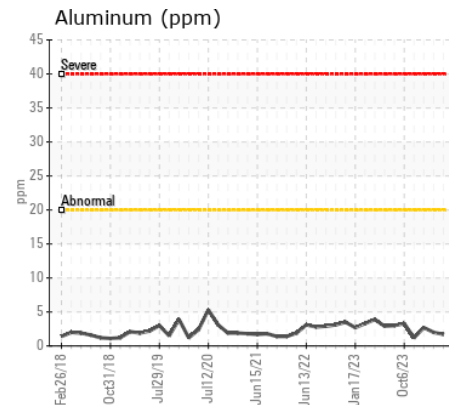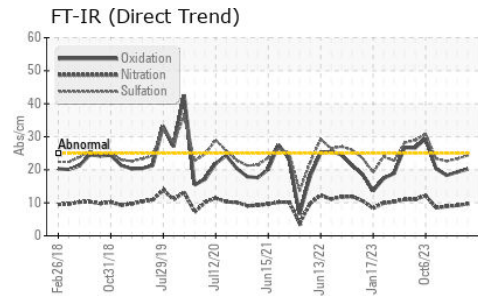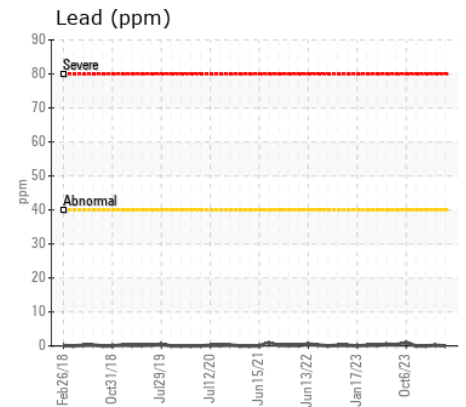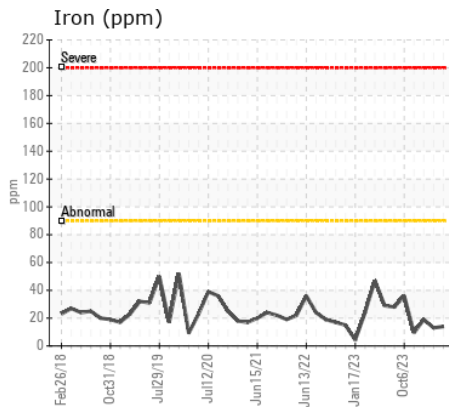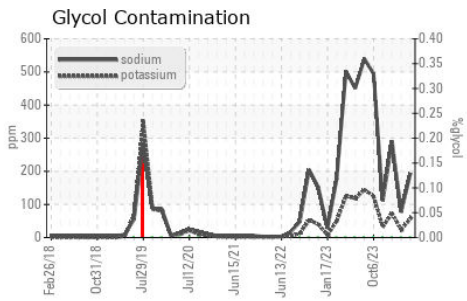

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0889001 **Received** : 15 Apr 2024
Lab Number : 02628774 **Tested** : 16 Apr 2024
Unique Number : 5761906 **Diagnosed** : 17 Apr 2024 - Kevin Marson
Test Package : MOB 1 (Additional Tests: Glycol)

CITY OF THUNDER BAY
 AUTO MAINTENANCE STORES, 570 FORT WILLIAM ROAD
 THUNDER BAY, ON
 CA P7B 2Z8
 Contact: Sean Malcolm
 sean.malcolm@thunderbay.ca
 T: (807)684-2716
 F: (807)344-0237

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.