



LIEBHERR

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
(369351)
Machine Id
LIEBHERR LH40C 136712-1527
Component
Hydraulic System
Fluid
{not provided} (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH0281040	LH0241978	LH0246954
Sample Date		Client Info		22 Mar 2024	05 Nov 2023	18 Jan 2023
Machine Age	hrs	Client Info		2530	2040	1000
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changd	Not Changd	Not Changd
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>50	8	8	6
Chromium	ppm	ASTM D5185(m)	>15	<1	<1	0
Nickel	ppm	ASTM D5185(m)	>5	0	<1	0
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)		0	<1	0
Aluminum	ppm	ASTM D5185(m)	>8	<1	<1	<1
Lead	ppm	ASTM D5185(m)	>5	<1	<1	<1
Copper	ppm	ASTM D5185(m)	>15	9	5	4
Tin	ppm	ASTM D5185(m)	>5	0	0	<1
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE

CONTAMINATION








The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Silicon	ppm	ASTM D5185(m)	>25	3	4	4
Potassium	ppm	ASTM D5185(m)	>20	<1	<1	<1
Water		WC Method	>0.1	NEG	NEG	NEG
Particles >4µm		ASTM D7647	>20000	17158	4649	5758
Particles >6µm		ASTM D7647	>5000	4096	679	1000
Particles >14µm		ASTM D7647	>640	164	27	53
Particles >21µm		ASTM D7647	>160	26	6	18
Particles >38µm		ASTM D7647	>40	1	1	1
Particles >71µm		ASTM D7647	>10	1	0	0
Oil Cleanliness		ISO 4406 (c)	>21/19/16	21/19/15	19/17/12	20/17/13
Silt	scalar	Visual*	NONE	NONE	VLITE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	VLITE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		2	2	2
Boron	ppm	ASTM D5185(m)		<1	<1	<1
Barium	ppm	ASTM D5185(m)		0	<1	0
Molybdenum	ppm	ASTM D5185(m)		0	0	0
Manganese	ppm	ASTM D5185(m)		0	0	<1
Magnesium	ppm	ASTM D5185(m)		3	3	3
Calcium	ppm	ASTM D5185(m)		1113	1063	1236
Phosphorus	ppm	ASTM D5185(m)		552	540	635
Zinc	ppm	ASTM D5185(m)		643	628	665
Sulfur	ppm	ASTM D5185(m)		3721	3633	4126
Visc @ 40°C	cSt	ASTM D7279(m)		39.0	38.2	40.5

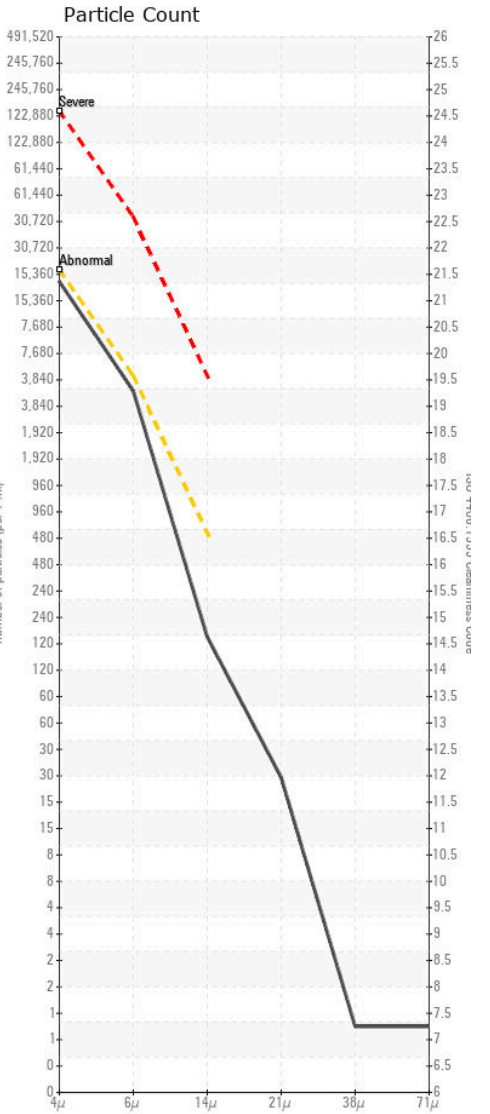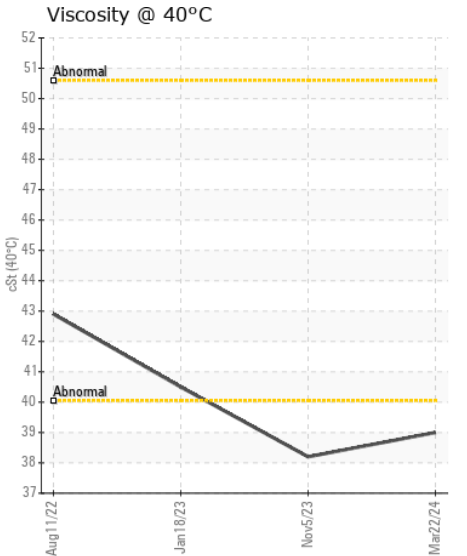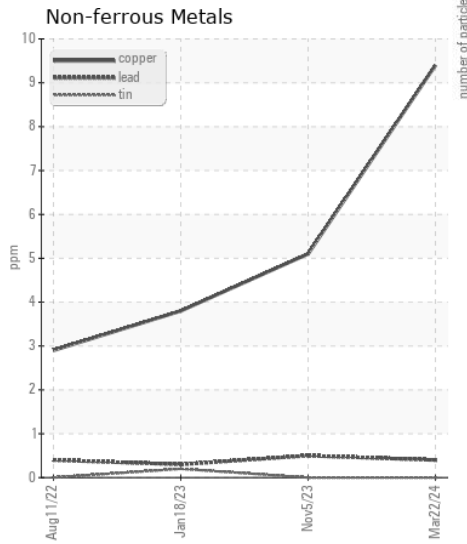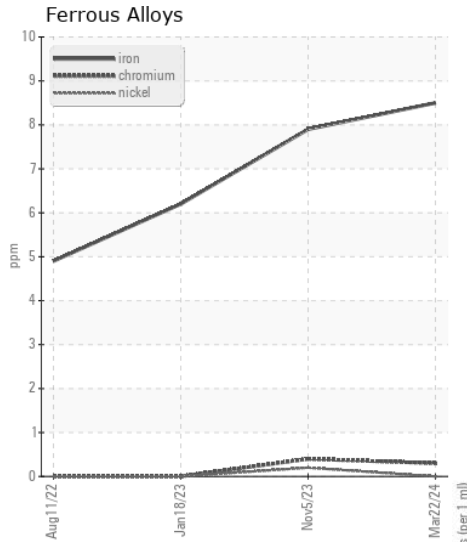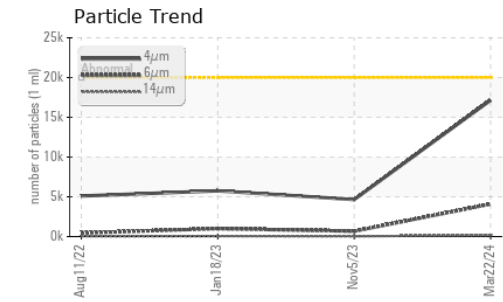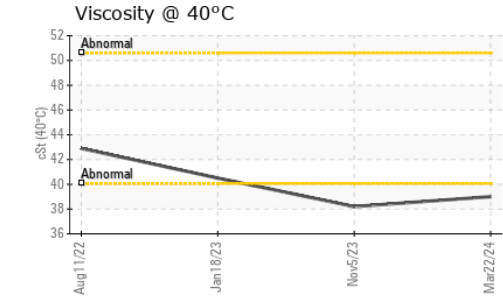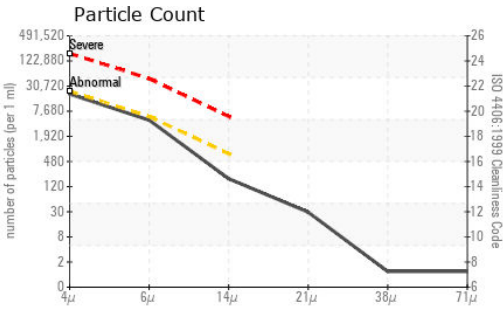

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : LH0281040 **Received** : 15 Apr 2024
Lab Number : 02628872 **Tested** : 16 Apr 2024
Unique Number : 5762004 **Diagnosed** : 16 Apr 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: PrtCount)

RICHMOND STEEL RECYCLING
 1004 EASTERN STREET
 PRINCE GEORGE, BC
 CA V2N 2K8
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
F: