



|                 |               |
|-----------------|---------------|
| WEAR            | <b>NORMAL</b> |
| CONTAMINATION   | <b>NORMAL</b> |
| FLUID CONDITION | <b>NORMAL</b> |



Machine Id  
**713060**  
Component  
**Transmission (Auto)**  
Fluid  
**DEXRON III (--- GAL)**

**RECOMMENDATION**

Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition.

**WEAR**

Les taux d'usure de tous les composants sont normaux.

**CONTAMINATION**

Il n'y a aucun indice de contamination dans le fluide.

**FLUID CONDITION**











L'état de le fluide est acceptable pour la durée de service.

| Test           | UOM | Method      | Limit/Abn | Current            | History1    | History2    |
|----------------|-----|-------------|-----------|--------------------|-------------|-------------|
| Sample Number  |     | Client Info |           | <b>PC0088254</b>   | PC0075469   | PC0066267   |
| Sample Date    |     | Client Info |           | <b>11 Apr 2024</b> | 09 Aug 2023 | 20 Mar 2023 |
| Machine Age    | kms | Client Info |           | <b>24019</b>       | 12850       | 5694        |
| Oil Age        | kms | Client Info |           | <b>0</b>           | 0           | 0           |
| Filter Age     | kms | Client Info |           | <b>0</b>           | 0           | 0           |
| Oil Changed    |     | Client Info |           | <b>N/A</b>         | N/A         | Not Changd  |
| Filter Changed |     | Client Info |           | <b>N/A</b>         | N/A         | Changed     |
| Sample Status  |     |             |           | <b>NORMAL</b>      | NORMAL      | NORMAL      |

|              |        |               |      |              |      |      |
|--------------|--------|---------------|------|--------------|------|------|
| Iron         | ppm    | ASTM D5185(m) | >220 | <b>72</b>    | 76   | 60   |
| Chromium     | ppm    | ASTM D5185(m) | >2   | <b>0</b>     | <1   | 0    |
| Nickel       | ppm    | ASTM D5185(m) | >5   | <b>&lt;1</b> | <1   | <1   |
| Titanium     | ppm    | ASTM D5185(m) |      | <b>0</b>     | 0    | 0    |
| Silver       | ppm    | ASTM D5185(m) | >5   | <b>0</b>     | 0    | 0    |
| Aluminum     | ppm    | ASTM D5185(m) | >75  | <b>30</b>    | 33   | 14   |
| Lead         | ppm    | ASTM D5185(m) | >95  | <b>36</b>    | 13   | 4    |
| Copper       | ppm    | ASTM D5185(m) | >60  | <b>31</b>    | 37   | 13   |
| Tin          | ppm    | ASTM D5185(m) | >10  | <b>3</b>     | 2    | 1    |
| Vanadium     | ppm    | ASTM D5185(m) |      | <b>0</b>     | 0    | 0    |
| White Metal  | scalar | Visual*       | NONE | <b>VLITE</b> | NONE | NONE |
| Yellow Metal | scalar | Visual*       | NONE | <b>NONE</b>  | NONE | NONE |

|                  |        |               |       |              |       |       |
|------------------|--------|---------------|-------|--------------|-------|-------|
| Silicon          | ppm    | ASTM D5185(m) | >25   | <b>7</b>     | 8     | 7     |
| Potassium        | ppm    | ASTM D5185(m) | >20   | <b>4</b>     | 3     | 4     |
| Water            |        | WC Method     | >0.1  | <b>NEG</b>   | NEG   | NEG   |
| Silt             | scalar | Visual*       | NONE  | <b>NONE</b>  | NONE  | NONE  |
| Debris           | scalar | Visual*       | NONE  | <b>VLITE</b> | VLITE | NONE  |
| Sand/Dirt        | scalar | Visual*       | NONE  | <b>NONE</b>  | NONE  | NONE  |
| Appearance       | scalar | Visual*       | NORML | <b>NORML</b> | NORML | NORML |
| Odor             | scalar | Visual*       | NORML | <b>NORML</b> | NORML | NORML |
| Emulsified Water | scalar | Visual*       | >0.1  | <b>NEG</b>   | NEG   | NEG   |

|                      |       |               |      |              |      |      |
|----------------------|-------|---------------|------|--------------|------|------|
| Sodium               | ppm   | ASTM D5185(m) |      | <b>6</b>     | 6    | 5    |
| Boron                | ppm   | ASTM D5185(m) |      | <b>47</b>    | 85   | 58   |
| Barium               | ppm   | ASTM D5185(m) |      | <b>&lt;1</b> | <1   | <1   |
| Molybdenum           | ppm   | ASTM D5185(m) |      | <b>0</b>     | <1   | <1   |
| Manganese            | ppm   | ASTM D5185(m) |      | <b>2</b>     | 2    | 2    |
| Magnesium            | ppm   | ASTM D5185(m) |      | <b>&lt;1</b> | <1   | <1   |
| Calcium              | ppm   | ASTM D5185(m) |      | <b>122</b>   | 114  | 119  |
| Phosphorus           | ppm   | ASTM D5185(m) |      | <b>202</b>   | 264  | 232  |
| Zinc                 | ppm   | ASTM D5185(m) |      | <b>6</b>     | 16   | 5    |
| Sulfur               | ppm   | ASTM D5185(m) |      | <b>1444</b>  | 1105 | 1413 |
| Visc @ 40°C          | cSt   | ASTM D7279(m) | 26.0 | <b>32.9</b>  | 33.6 | 33.3 |
| Visc @ 100°C         | cSt   | ASTM D7279(m) | 5.5  | <b>6.4</b>   | 6.7  | 6.6  |
| Viscosity Index (VI) | Scale | ASTM D2270*   | 155  | <b>150</b>   | 161  | 158  |

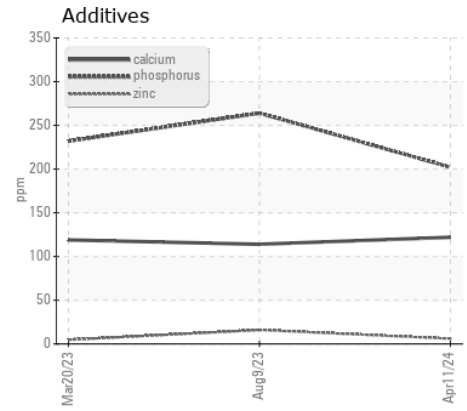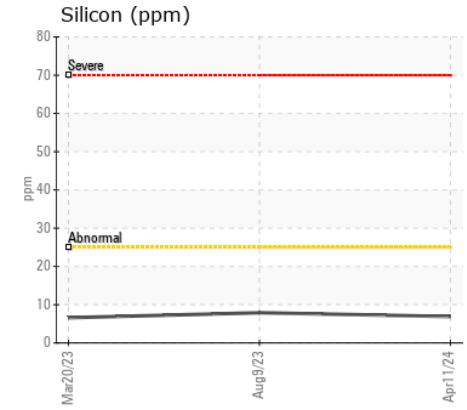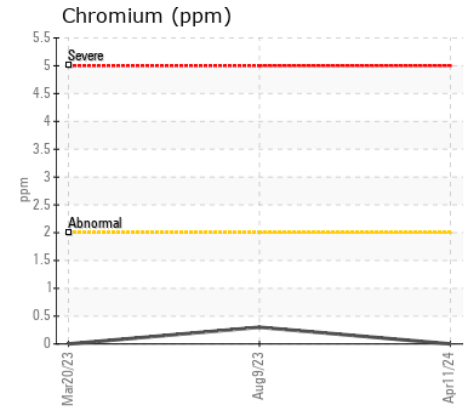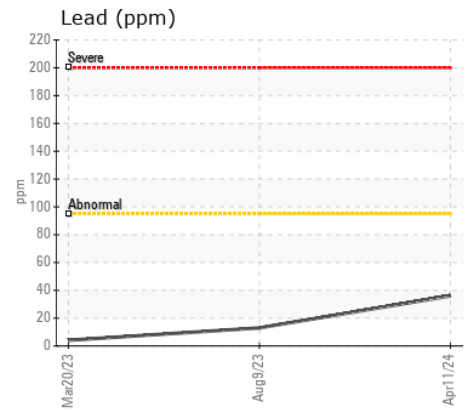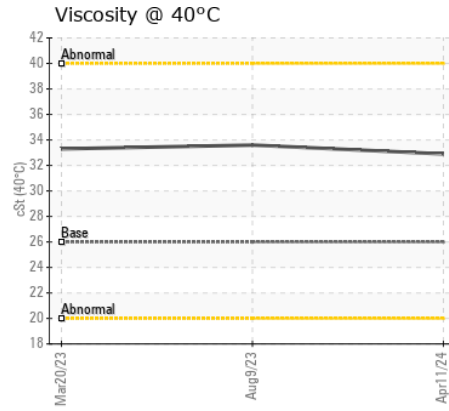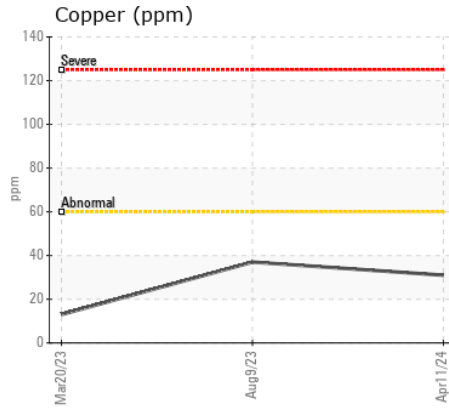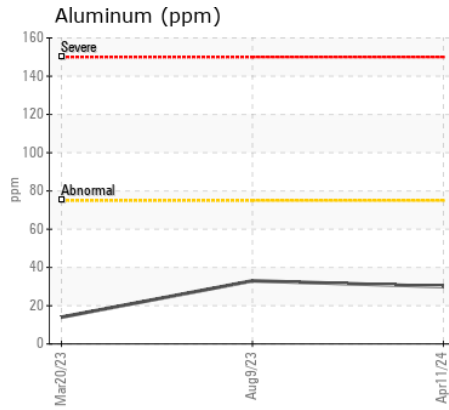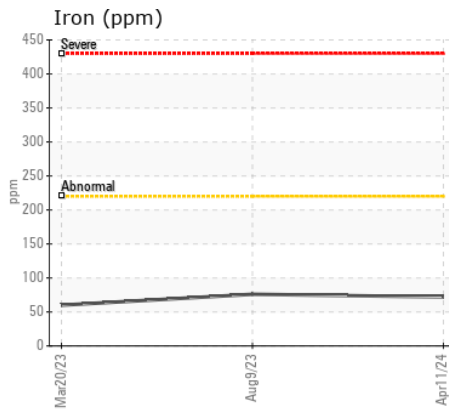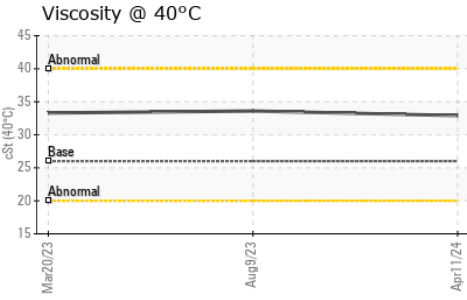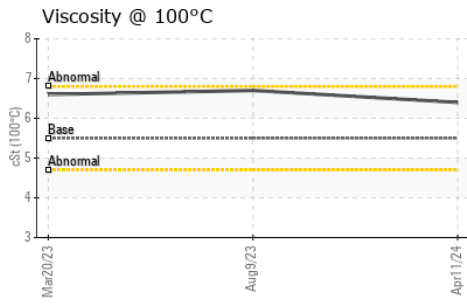

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : PC0088254  
**Lab Number** : 02628912  
**Unique Number** : 5762044  
**Test Package** : MOB 1 ( Additional Tests: KV100, VI )

**GFL Environmental - 737 - Quebec City Hauling**  
 6205 Boul. Wilfrid Hamel,  
 Quebec City, QC  
 CA G2E 5G8  
 Contact: Dave Beaulieu  
 davebeaulieu@matrec.ca

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

T:  
F: