



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
EX0363
 Component
Left Final Drive
 Fluid
SAE 80W90 (--- GAL)

RECOMMENDATION

Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition. Veuillez préciser la marque et le modèle du composant lors du prochain échantillon.

WEAR

Les taux d'usure de tous les composants sont normaux.











CONTAMINATION

Il n'y a aucun indice de contamination dans l'huile.

FLUID CONDITION

L'état de l'huile est acceptable pour la durée de service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0118332	---	---
Sample Date		Client Info		11 Apr 2024	---	---
Machine Age	hrs	Client Info		16875	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---
Iron	ppm	ASTM D5185(m)	>500	201	---	---
Chromium	ppm	ASTM D5185(m)	>10	1	---	---
Nickel	ppm	ASTM D5185(m)	>10	1	---	---
Titanium	ppm	ASTM D5185(m)		1	---	---
Silver	ppm	ASTM D5185(m)		0	---	---
Aluminum	ppm	ASTM D5185(m)	>25	17	---	---
Lead	ppm	ASTM D5185(m)	>25	0	---	---
Copper	ppm	ASTM D5185(m)	>50	<1	---	---
Tin	ppm	ASTM D5185(m)	>10	0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---
Silicon	ppm	ASTM D5185(m)	>75	74	---	---
Potassium	ppm	ASTM D5185(m)	>20	7	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	Visual*	NONE	VLITE	---	---
Debris	scalar	Visual*	NONE	VLITE	---	---
Sand/Dirt	scalar	Visual*	NONE	VLITE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---
Sodium	ppm	ASTM D5185(m)	>50	4	---	---
Boron	ppm	ASTM D5185(m)	200	57	---	---
Barium	ppm	ASTM D5185(m)	0	0	---	---
Molybdenum	ppm	ASTM D5185(m)	0	<1	---	---
Manganese	ppm	ASTM D5185(m)		1	---	---
Magnesium	ppm	ASTM D5185(m)	0	37	---	---
Calcium	ppm	ASTM D5185(m)	20	1076	---	---
Phosphorus	ppm	ASTM D5185(m)	1000	775	---	---
Zinc	ppm	ASTM D5185(m)	20	429	---	---
Sulfur	ppm	ASTM D5185(m)	22000	11722	---	---
Visc @ 40°C	cSt	ASTM D7279(m)	135	112	---	---

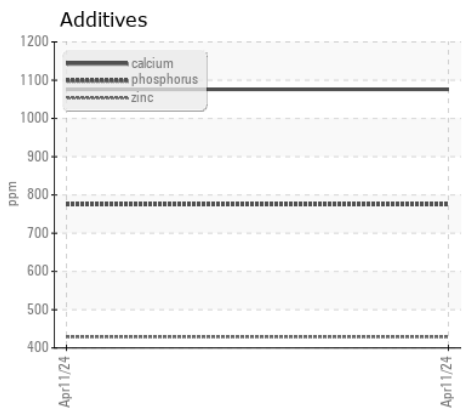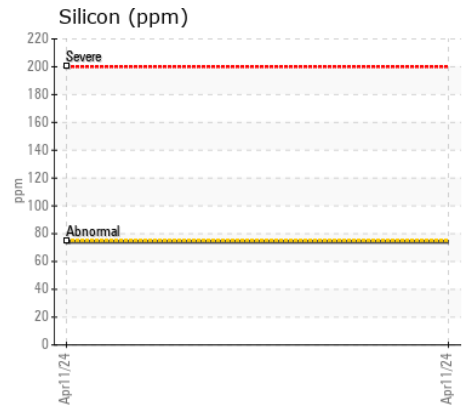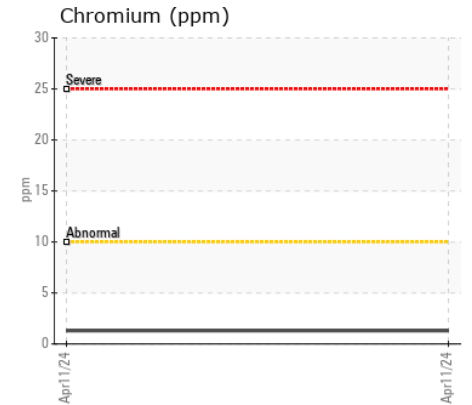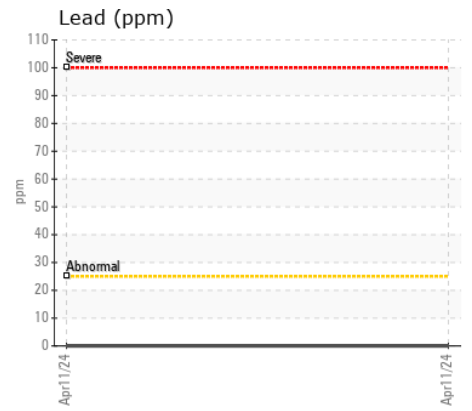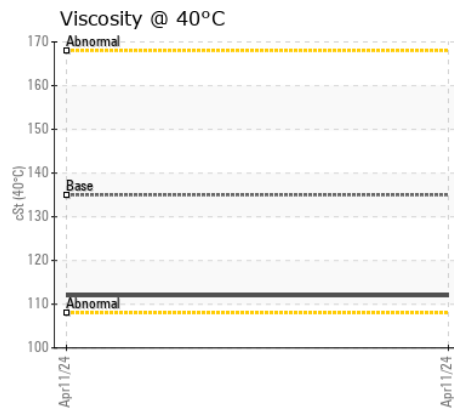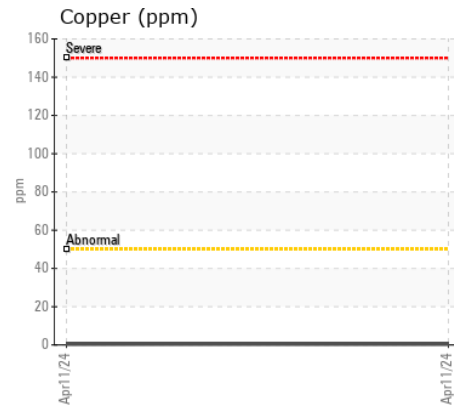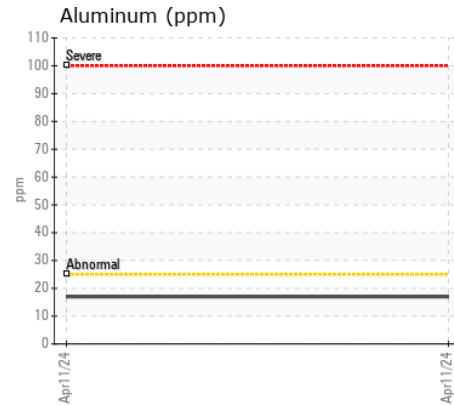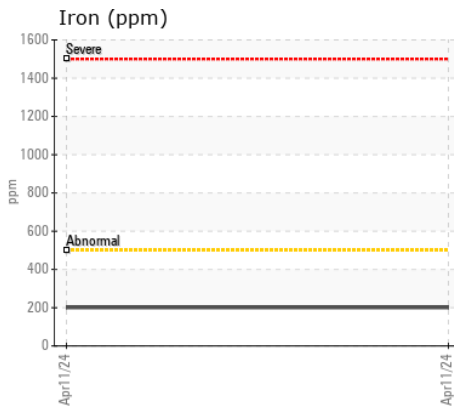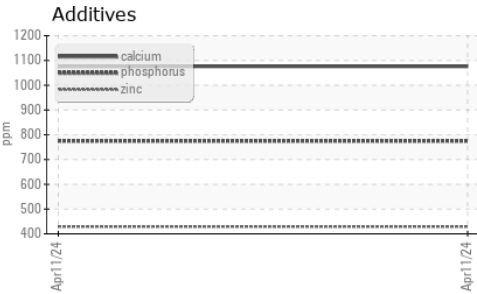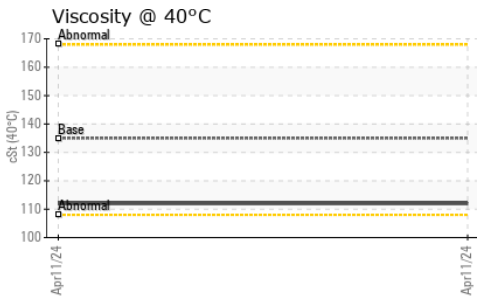

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0118332
Lab Number : 02628944
Unique Number : 5762076
Test Package : MOB 1

Received : 15 Apr 2024
Tested : 15 Apr 2024
Diagnosed : 16 Apr 2024 - Kevin Marson
GFL Environmental - 743 - Montreal Est CD Processing
 10930 rue Sherbrooke
 Montreal, QC
 CA H1B 1B4
 Contact: Patrick Beaulieu
 patrick.beaulieu@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.