



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**JOHN DEERE 210K 66614 (S/N 1R8210KXHEG892121)**  
 Component  
**Rear Right Final Drive**  
 Fluid  
**PETRO CANADA DURATRAN (--- GAL)**

**RECOMMENDATION**

Confirm the source of the lubricant being utilized for top-up/fill.  
 Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>PC0075758</b>	---	---
Sample Date		Client Info		<b>08 Mar 2024</b>	---	---
Machine Age	hrs	Client Info		<b>3754</b>	---	---
Oil Age	hrs	Client Info		<b>0</b>	---	---
Filter Age	hrs	Client Info		<b>0</b>	---	---
Oil Changed		Client Info		<b>Changed</b>	---	---
Filter Changed		Client Info		<b>Not Changd</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>750	<b>100</b>	---	---
Chromium	ppm	ASTM D5185(m)	>9	<b>&lt;1</b>	---	---
Nickel	ppm	ASTM D5185(m)	>10	<b>2</b>	---	---
Titanium	ppm	ASTM D5185(m)		<b>0</b>	---	---
Silver	ppm	ASTM D5185(m)		<b>0</b>	---	---
Aluminum	ppm	ASTM D5185(m)	>40	<b>1</b>	---	---
Lead	ppm	ASTM D5185(m)	>15	<b>&lt;1</b>	---	---
Copper	ppm	ASTM D5185(m)	>40	<b>56</b>	---	---
Tin	ppm	ASTM D5185(m)	>10	<b>2</b>	---	---
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	---	---
White Metal	scalar	Visual*	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	---	---

**CONTAMINATION**












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>75	<b>15</b>	---	---
Potassium	ppm	ASTM D5185(m)	>20	<b>4</b>	---	---
Water		WC Method	>0.075	<b>NEG</b>	---	---
Silt	scalar	Visual*	NONE	<b>NONE</b>	---	---
Debris	scalar	Visual*	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	Visual*	NONE	<b>VLITE</b>	---	---
Appearance	scalar	Visual*	NORML	<b>NORML</b>	---	---
Odor	scalar	Visual*	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	Visual*	>0.075	<b>NEG</b>	---	---

**FLUID CONDITION**

Additive levels indicate the addition of a different brand, or type of oil.  
 Viscosity of sample indicates oil is within SAE 75W80 range, advise investigate. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)	>51	<b>7</b>	---	---
Boron	ppm	ASTM D5185(m)	110	<b>2</b>	---	---
Barium	ppm	ASTM D5185(m)	0.0	<b>4</b>	---	---
Molybdenum	ppm	ASTM D5185(m)	0.0	<b>0</b>	---	---
Manganese	ppm	ASTM D5185(m)	1	<b>4</b>	---	---
Magnesium	ppm	ASTM D5185(m)	13	<b>98</b>	---	---
Calcium	ppm	ASTM D5185(m)	3610	<b>3542</b>	---	---
Phosphorus	ppm	ASTM D5185(m)	1192	<b>1049</b>	---	---
Zinc	ppm	ASTM D5185(m)	1455	<b>1232</b>	---	---
Sulfur	ppm	ASTM D5185(m)	2641	<b>3307</b>	---	---
Visc @ 40°C	cSt	ASTM D7279(m)	55.14	<b>48.2</b>	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	9.38	<b>7.5</b>	---	---
Viscosity Index (VI)	Scale	ASTM D2270*	153	<b>119</b>	---	---

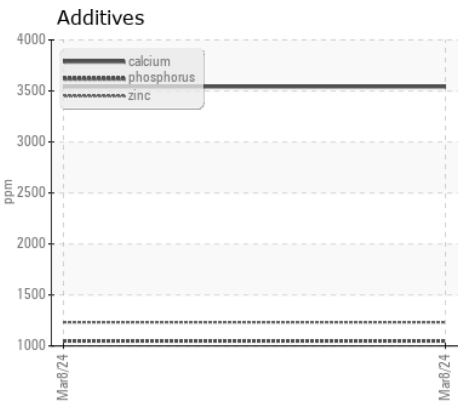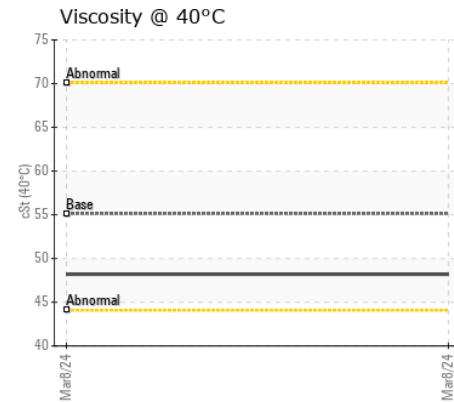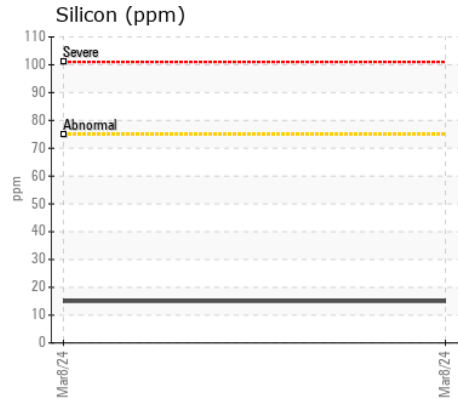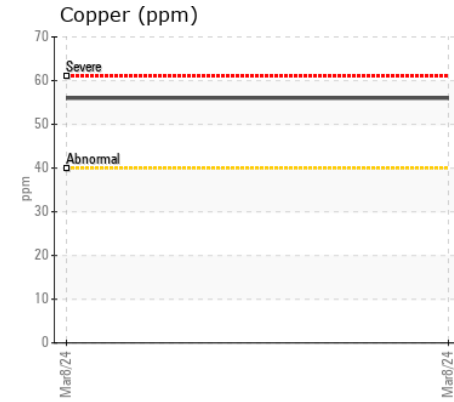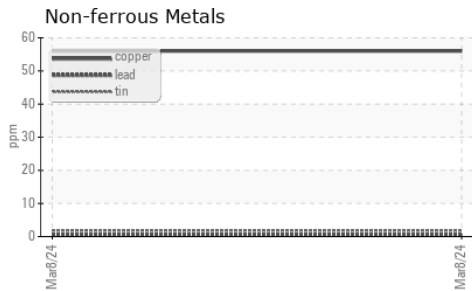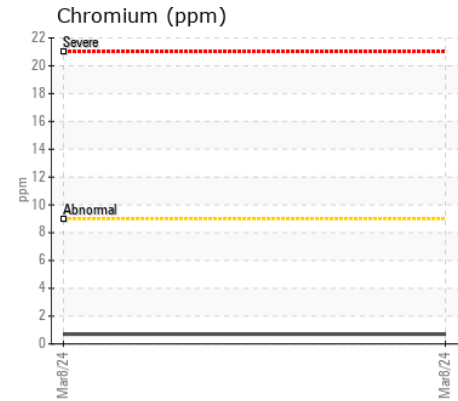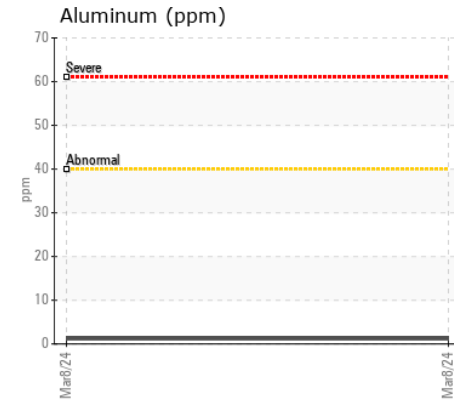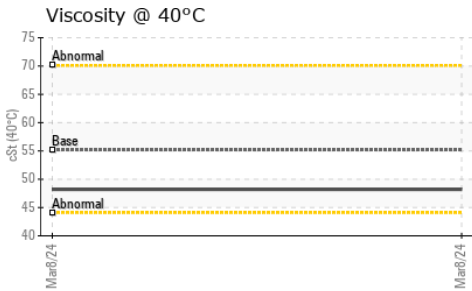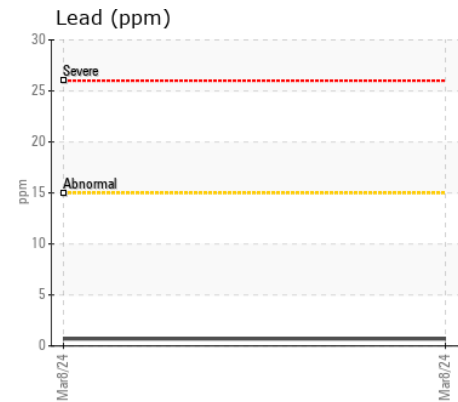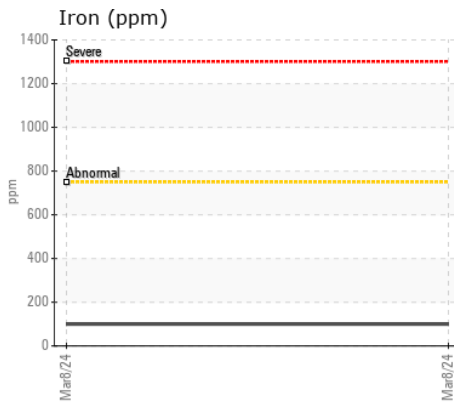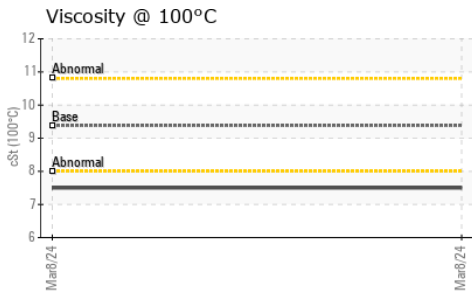

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : PC0075758 **Received** : 15 Apr 2024  
**Lab Number** : 02628968 **Tested** : 16 Apr 2024  
**Unique Number** : 5762100 **Diagnosed** : 16 Apr 2024 - Kevin Marson  
**Test Package** : MOB 1 ( Additional Tests: KV100, VI )

**TRUCK AND EQUIPMENT SOLUTION**  
 2 BERTRAM INDUSTRIAL PKWY.  
 MIDHURST, ON  
 CA L9X 1L2  
 Contact: Julie Holden  
 parts@tesbarrie.com  
 T: (705)792-7620  
 F: (705)725-5425

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.