



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>ABNORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**1149**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON XL SYN BLEND 15W40 (22 LTR)**

**RECOMMENDATION**

The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>GFL0117314</b>	GFL0112394	GFL0091572
Sample Date		Client Info		<b>09 Apr 2024</b>	04 Mar 2024	18 Oct 2023
Machine Age	kms	Client Info		<b>409188</b>	406000	21425
Oil Age	kms	Client Info		<b>0</b>	0	0
Filter Age	kms	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>Changed</b>	Changed	Changed
Sample Status				<b>ABNORMAL</b>	SEVERE	ABNORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>127	<b>36</b>	72	36
Chromium	ppm	ASTM D5185(m)	>3	<b>&lt;1</b>	2	<1
Nickel	ppm	ASTM D5185(m)	>30	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185(m)	>2	<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)	>2	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185(m)	>59	<b>13</b>	30	5
Lead	ppm	ASTM D5185(m)	>29	<b>0</b>	2	1
Copper	ppm	ASTM D5185(m)	>135	<b>&lt;1</b>	<1	<1
Tin	ppm	ASTM D5185(m)	>2	<b>0</b>	<1	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0

**CONTAMINATION**













There is a moderate amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

Silicon	ppm	ASTM D5185(m)	>18	<b>3</b>	5	4
Potassium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	<1	0
Fuel	%	ASTM D7593*	>2.0	<b>▲ 4.4</b>	▲ 6.8	▲ 4.5
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	ASTM D7844*	>3	<b>1.3</b>	2.6	1.9
Nitration	Abs/cm	ASTM D7624*	>20	<b>8.7</b>	13.8	9.5
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>22.9</b>	27.0	24.0
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The BN result indicates that there is suitable alkalinity remaining in the oil. The oil is no longer serviceable due to the presence of contaminants.

Sodium	ppm	ASTM D5185(m)		<b>1</b>	1	1
Boron	ppm	ASTM D5185(m)	1	<b>4</b>	2	3
Barium	ppm	ASTM D5185(m)	1	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m)	60	<b>53</b>	52	55
Manganese	ppm	ASTM D5185(m)	1	<b>&lt;1</b>	<1	0
Magnesium	ppm	ASTM D5185(m)	1010	<b>860</b>	819	884
Calcium	ppm	ASTM D5185(m)	1070	<b>977</b>	977	993
Phosphorus	ppm	ASTM D5185(m)	1150	<b>939</b>	920	944
Zinc	ppm	ASTM D5185(m)	1270	<b>1071</b>	1052	1117
Sulfur	ppm	ASTM D5185(m)	2060	<b>2440</b>	2417	2418
Oxidation	Abs/.1mm	ASTM D7414*	>25	<b>17.6</b>	22.5	18.0
Base Number (BN)	mg KOH/g	ASTM D2896*	9.6	<b>9.57</b>	8.44	8.52
Visc @ 100°C	cSt	ASTM D7279(m)	15.5	<b>13.9</b>	13.6	14.1

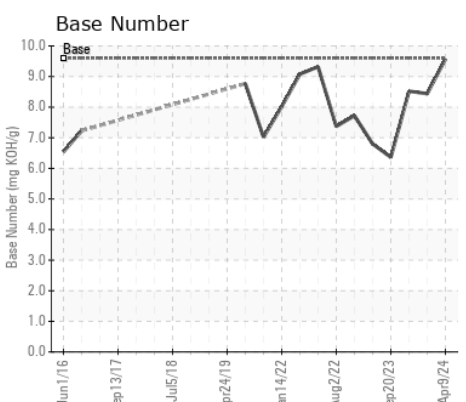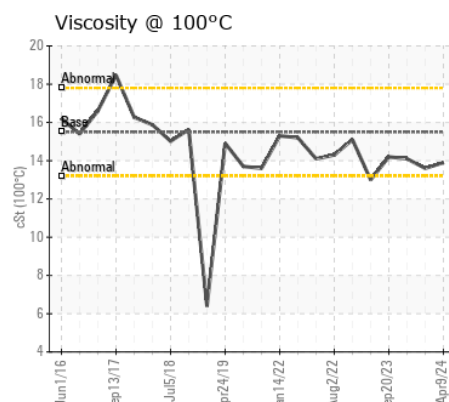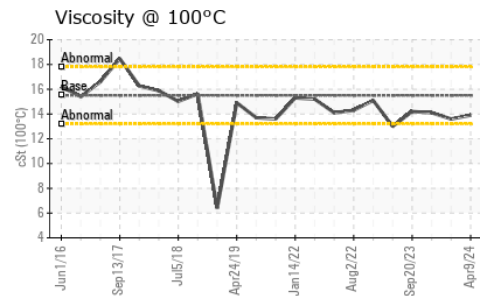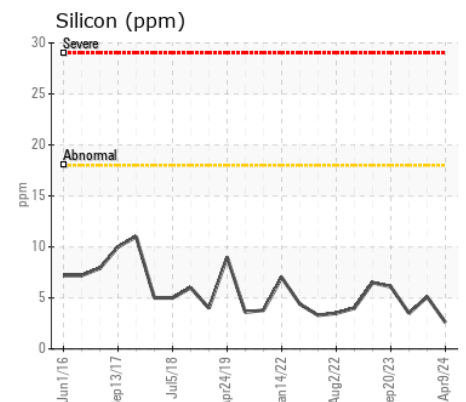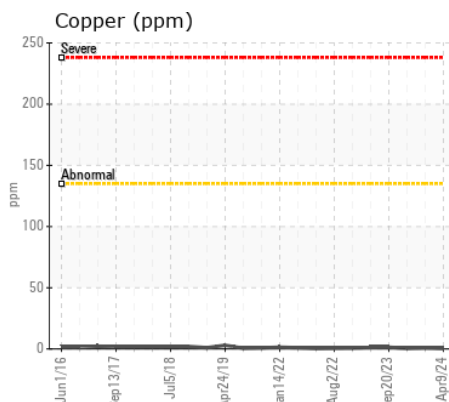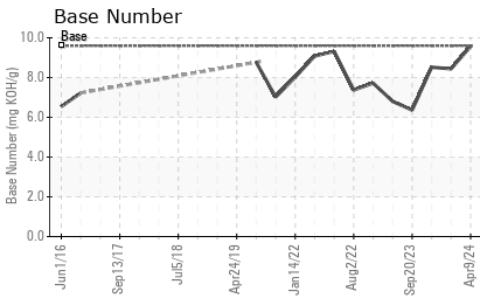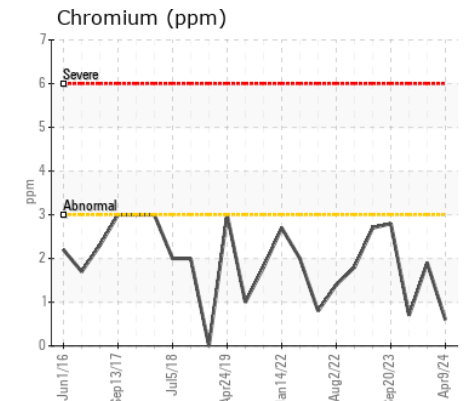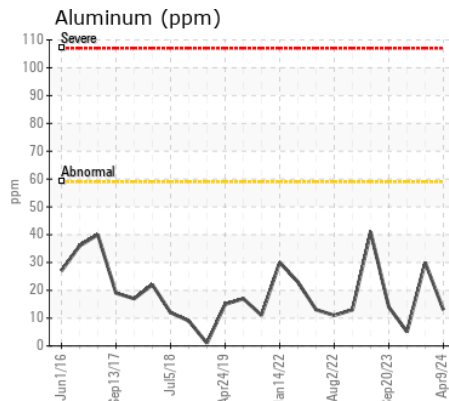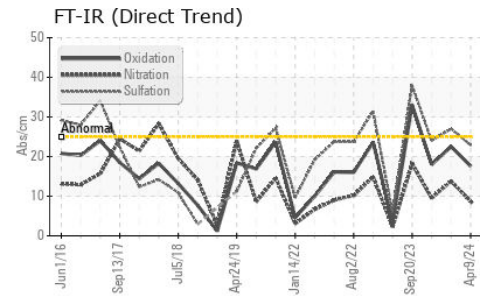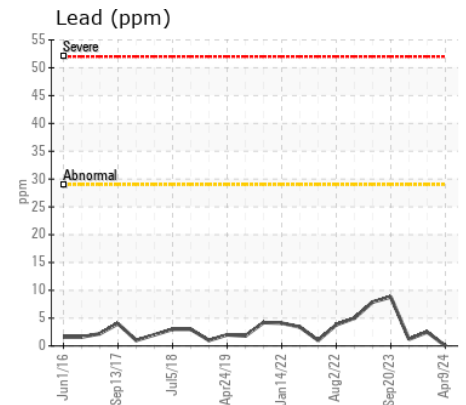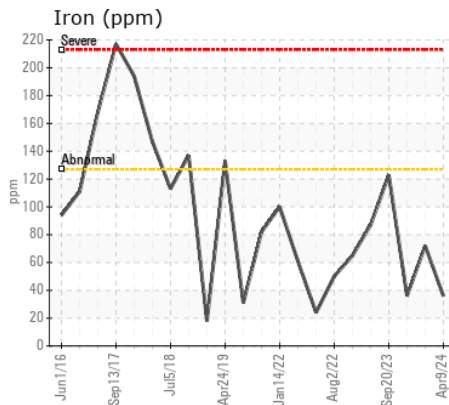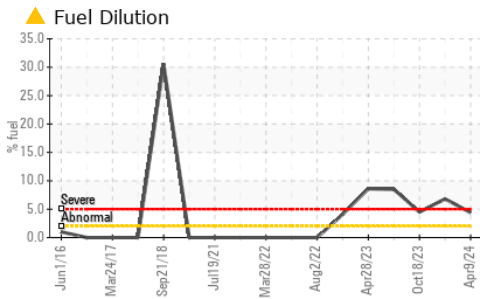

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : GFL0117314  
**Lab Number** : 02629133  
**Unique Number** : 5762265  
**Test Package** : MOB 2 ( Additional Tests: PercentFuel )  
**Received** : 16 Apr 2024  
**Tested** : 17 Apr 2024  
**Diagnosed** : 17 Apr 2024 - Wes Davis

**GFL Environmental - 550 - Rocky View County**  
 220 Carmek Blvd  
 Rocky View County, AB  
 CA T1X 1X1  
 Contact: GFL Calgary  
 calgarymaintenance@gflenv.com  
 T:  
 F: (403)369-6163

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.