



TRAAP

Texas Refinery Advanced Analysis Program

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	ABNORMAL
FLUID CONDITION	NORMAL

Machine Id
GMC 1GTP9EED4KZ189909

Component
Gasoline Engine

Fluid
{not provided} (8 LTR)

RECOMMENDATION

We advise that you check the air filter, air induction system, and any areas where dirt may enter the component. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition. No other corrective action is recommended at this time. Please specify the brand, type, and viscosity of the oil on your next sample.

WEAR

All component wear rates are normal.














CONTAMINATION

Light fuel dilution occurring. There is a moderate concentration of dirt present in the oil. No other contaminants were detected in the oil.

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. Viscosity of sample indicates oil is within SAE 20 range, advise investigate. The oil is no longer serviceable due to the presence of contaminants.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		TR02629204	---	---
Sample Date		Client Info		15 Mar 2024	---	---
Machine Age	kms	Client Info		84021	---	---
Oil Age	kms	Client Info		0	---	---
Filter Age	kms	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				ABNORMAL	---	---
Iron	ppm	ASTM D5185(m)	>150	39	---	---
Chromium	ppm	ASTM D5185(m)	>20	1	---	---
Nickel	ppm	ASTM D5185(m)	>5	<1	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)	>2	0	---	---
Aluminum	ppm	ASTM D5185(m)	>40	5	---	---
Lead	ppm	ASTM D5185(m)	>50	0	---	---
Copper	ppm	ASTM D5185(m)	>155	12	---	---
Tin	ppm	ASTM D5185(m)	>10	0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
Silicon	ppm	ASTM D5185(m)	>30	▲ 39	---	---
Potassium	ppm	ASTM D5185(m)	>20	2	---	---
Fuel	%	ASTM D7593*	>4.0	▲ 2.4	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	ASTM D7844*		0	---	---
Nitration	Abs/cm	ASTM D7624*	>20	12.0	---	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	24.9	---	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---
Sodium	ppm	ASTM D5185(m)	>400	12	---	---
Boron	ppm	ASTM D5185(m)		22	---	---
Barium	ppm	ASTM D5185(m)		<1	---	---
Molybdenum	ppm	ASTM D5185(m)		131	---	---
Manganese	ppm	ASTM D5185(m)		3	---	---
Magnesium	ppm	ASTM D5185(m)		499	---	---
Calcium	ppm	ASTM D5185(m)		1021	---	---
Phosphorus	ppm	ASTM D5185(m)		633	---	---
Zinc	ppm	ASTM D5185(m)		756	---	---
Sulfur	ppm	ASTM D5185(m)		1888	---	---
Oxidation	Abs/.1mm	ASTM D7414*	>25	20.1	---	---
Base Number (BN)	mg KOH/g	ASTM D2896*		4.10	---	---
Visc @ 100°C	cSt	ASTM D7279(m)		8.1	---	---

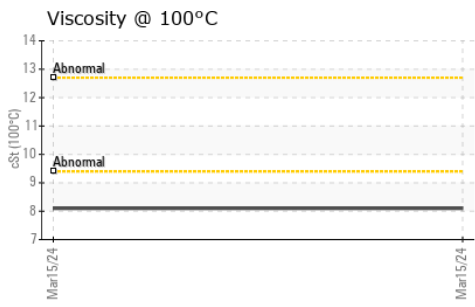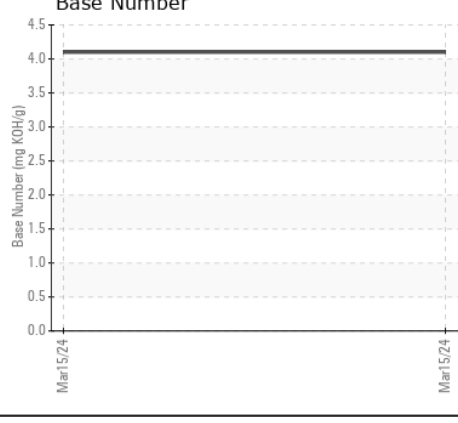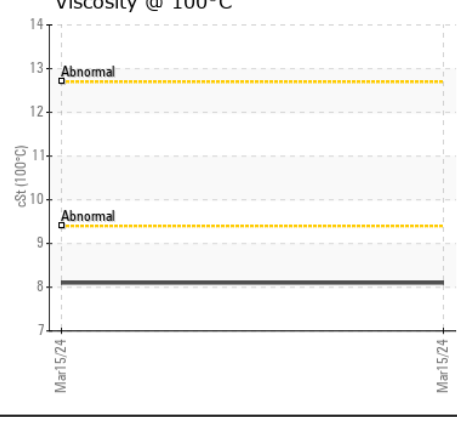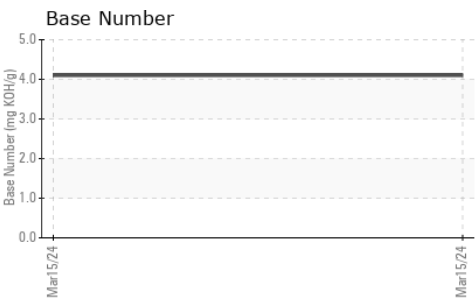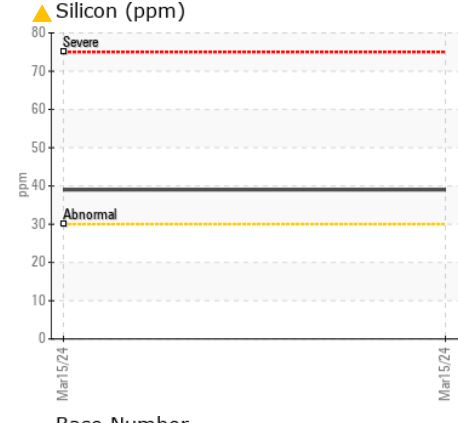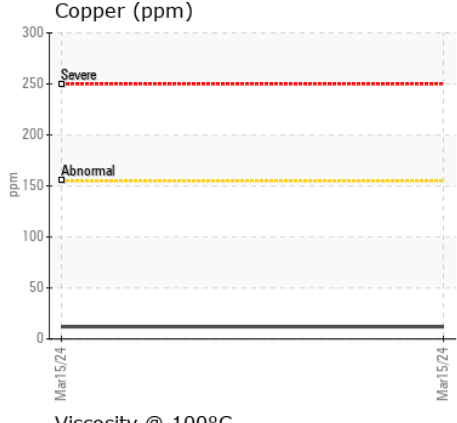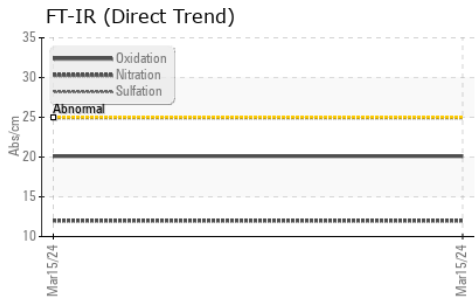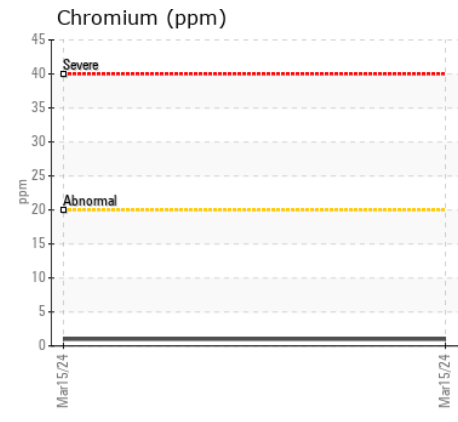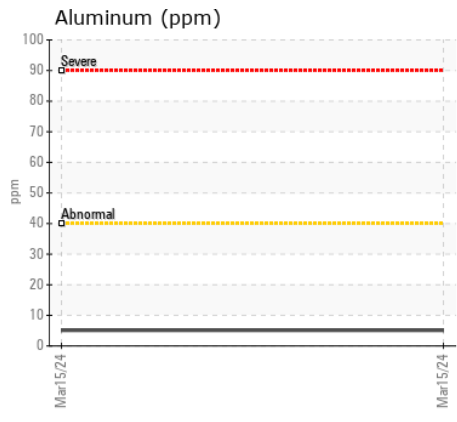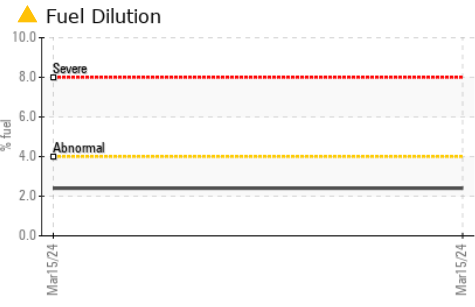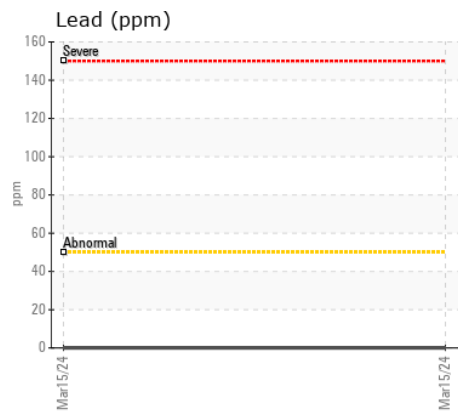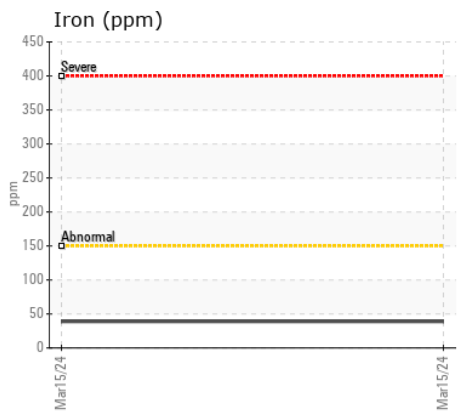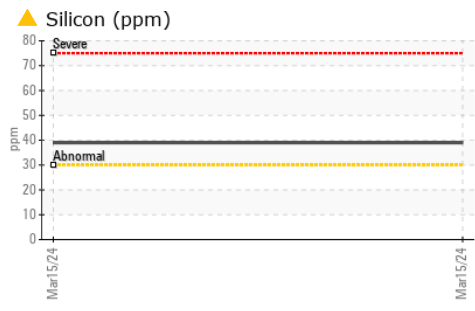

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : TR02629204 **Received** : 16 Apr 2024
Lab Number : 02629204 **Tested** : 18 Apr 2024
Unique Number : 5762336 **Diagnosed** : 18 Apr 2024 - Kevin Marson
Test Package : MOB 2 (Additional Tests: FuelDilution, PercentFuel)

VALLEY VIEW COLONY
 BOX 99
 TORRINGTON, AB
 CA T0M 2B0
 Contact: David Stahl
 vvmech@airenet.com
 T: (403)631-3875
 F: (403)631-3875

To discuss this sample report, contact Customer Service at 1-800-827-0711.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)