

Machine Id  
**101024**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 10W30 (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>GFL0107925</b>	---	---
Sample Date		Client Info		<b>04 Apr 2024</b>	---	---
Machine Age	hrs	Client Info		<b>32144</b>	---	---
Oil Age	hrs	Client Info		<b>0</b>	---	---
Filter Age	hrs	Client Info		<b>0</b>	---	---
Oil Changed		Client Info		<b>Changed</b>	---	---
Filter Changed		Client Info		<b>Changed</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	<b>12</b>	---	---
Chromium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	---	---
Nickel	ppm	ASTM D5185(m)	>4	<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185(m)		<b>0</b>	---	---
Silver	ppm	ASTM D5185(m)	>3	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185(m)	>20	<b>8</b>	---	---
Lead	ppm	ASTM D5185(m)	>40	<b>0</b>	---	---
Copper	ppm	ASTM D5185(m)	>330	<b>5</b>	---	---
Tin	ppm	ASTM D5185(m)	>15	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	---	---

**CONTAMINATION**












Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	<b>4</b>	---	---
Potassium	ppm	ASTM D5185(m)	>20	<b>11</b>	---	---
Fuel		WC Method	>5	<b>&lt;1.0</b>	---	---
Water		WC Method	>0.2	<b>NEG</b>	---	---
Glycol		WC Method		<b>NEG</b>	---	---
Soot %	%	ASTM D7844*	>3	<b>0</b>	---	---
Nitration	Abs/cm	ASTM D7624*	>20	<b>6.9</b>	---	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>18.9</b>	---	---
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	---	---

**FLUID CONDITION**

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		<b>5</b>	---	---
Boron	ppm	ASTM D5185(m)	2	<b>1</b>	---	---
Barium	ppm	ASTM D5185(m)	0	<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185(m)	50	<b>60</b>	---	---
Manganese	ppm	ASTM D5185(m)	0	<b>&lt;1</b>	---	---
Magnesium	ppm	ASTM D5185(m)	950	<b>1005</b>	---	---
Calcium	ppm	ASTM D5185(m)	1050	<b>1062</b>	---	---
Phosphorus	ppm	ASTM D5185(m)	995	<b>1008</b>	---	---
Zinc	ppm	ASTM D5185(m)	1180	<b>1192</b>	---	---
Sulfur	ppm	ASTM D5185(m)	2600	<b>2524</b>	---	---
Oxidation	Abs/.1mm	ASTM D7414*	>25	<b>15.0</b>	---	---
Visc @ 40°C	cSt	ASTM D7279(m)	80.1	<b>75.5</b>	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	12.00	<b>11.4</b>	---	---
Viscosity Index (VI)	Scale	ASTM D2270*	144	<b>143</b>	---	---

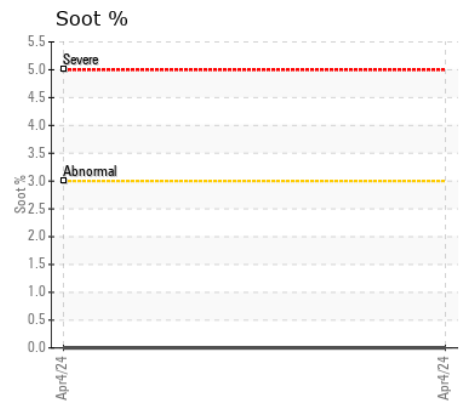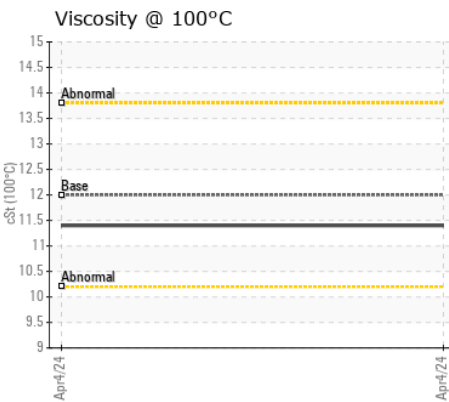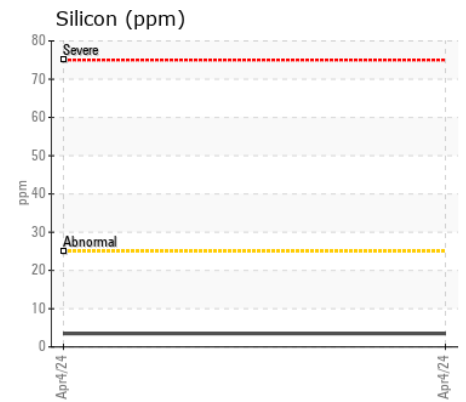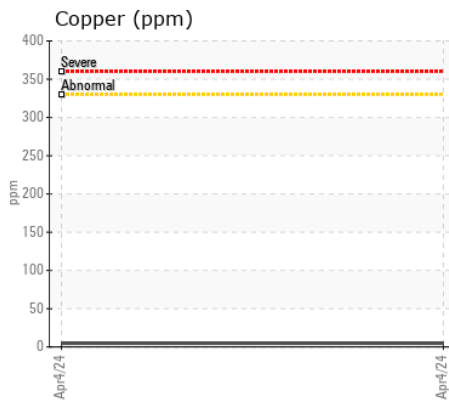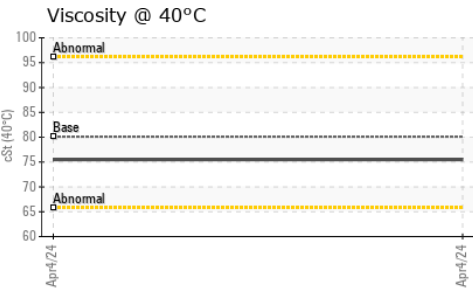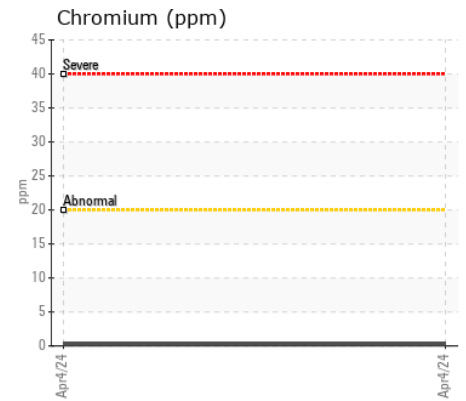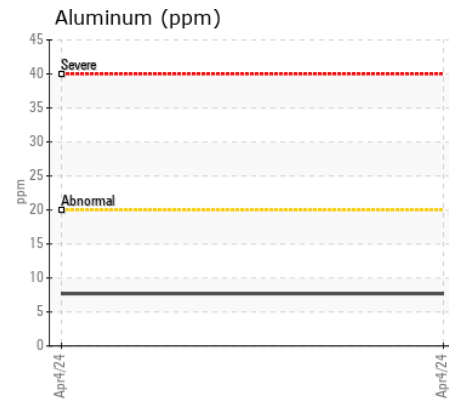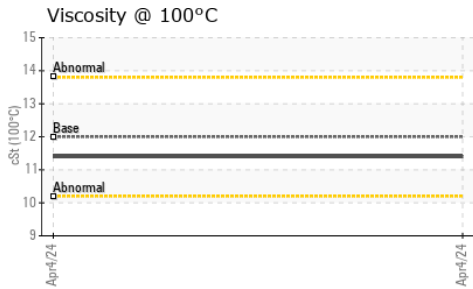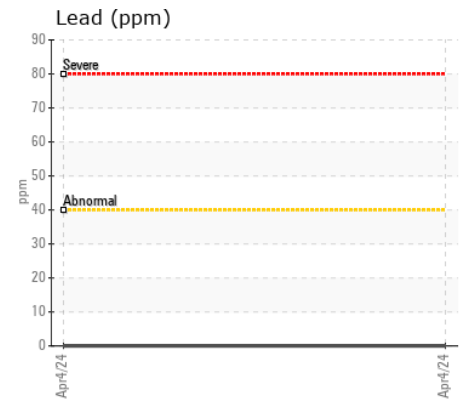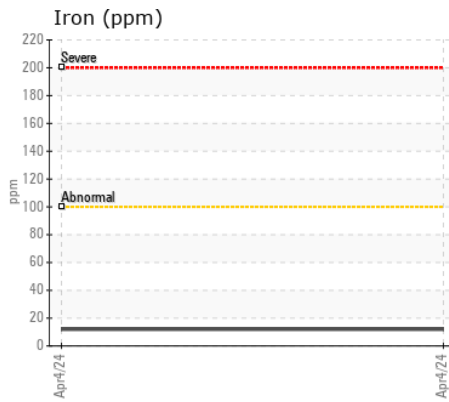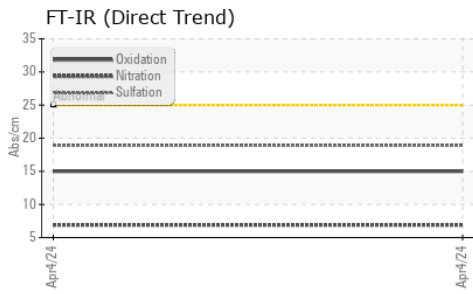

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : GFL0107925 **Received** : 17 Apr 2024  
**Lab Number** : 02629446 **Tested** : 17 Apr 2024  
**Unique Number** : 5762578 **Diagnosed** : 17 Apr 2024 - Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: KV40, VI )

**GFL Environmental - 350 - Emeral Park Regina**  
 2B Industrial Drive., Great Plains Industrial Park,  
 Emerald Park, SK  
 CA S4L 1B6  
 Contact: Vaughn Hortness  
 vhortness@gflenv.com  
 T: (877)244-9500  
 F: (306)244-9501

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.