



LIEBHERR

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
(352940)
Machine Id
LIEBHERR LH40M 123939-1215
Component
Diesel Engine
Fluid
PETRO CANADA DURON UHP 5W30 (30 LTR)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH0286704	LH0242352	LH0251513
Sample Date		Client Info		16 Apr 2024	05 Mar 2024	20 Jan 2023
Machine Age	hrs	Client Info		2235	2163	975
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Not Changd	Changed
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	5	4	8
Chromium	ppm	ASTM D5185(m)	>5	0	0	0
Nickel	ppm	ASTM D5185(m)	>5	0	<1	<1
Titanium	ppm	ASTM D5185(m)		0	0	<1
Silver	ppm	ASTM D5185(m)	>3	0	<1	0
Aluminum	ppm	ASTM D5185(m)	>15	1	1	2
Lead	ppm	ASTM D5185(m)	>30	0	<1	8
Copper	ppm	ASTM D5185(m)	>125	30	27	348
Tin	ppm	ASTM D5185(m)	>5	0	0	<1
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>60	6	6	8
Potassium	ppm	ASTM D5185(m)	>20	<1	<1	1
Fuel		WC Method	>5	<1.0	1.8	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	ASTM D7844*	>3	0	0	0
Nitration	Abs/cm	ASTM D7624*	>20	9.9	9.6	10.1
Sulfation	Abs/.1mm	ASTM D7415*	>30	20.7	20.2	23.7
Silt	scalar	Visual*	NONE	VLITE	---	---
Debris	scalar	Visual*	NONE	VLITE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		4	4	4
Boron	ppm	ASTM D5185(m)	0	40	42	31
Barium	ppm	ASTM D5185(m)	0	<1	0	3
Molybdenum	ppm	ASTM D5185(m)	64	61	59	53
Manganese	ppm	ASTM D5185(m)	0	0	0	<1
Magnesium	ppm	ASTM D5185(m)	1160	1130	1077	1070
Calcium	ppm	ASTM D5185(m)	820	844	838	880
Phosphorus	ppm	ASTM D5185(m)	1160	1020	1026	1000
Zinc	ppm	ASTM D5185(m)	1260	1199	1172	1133
Sulfur	ppm	ASTM D5185(m)	3000	2798	2936	2558
Oxidation	Abs/.1mm	ASTM D7414*	>25	19.3	18.8	22.4
Visc @ 100°C	cSt	ASTM D7279(m)	11.9	11.2	11.4	11.2

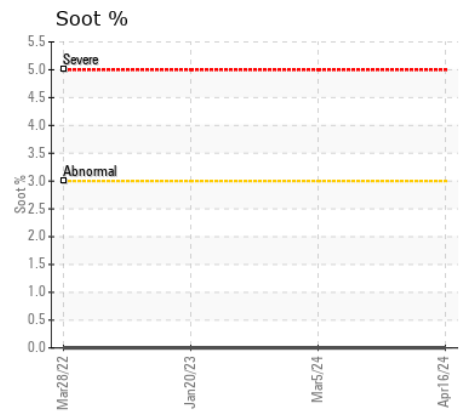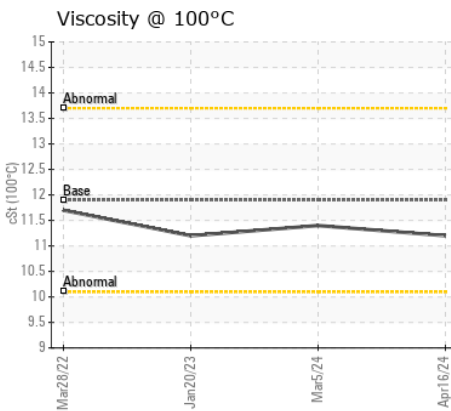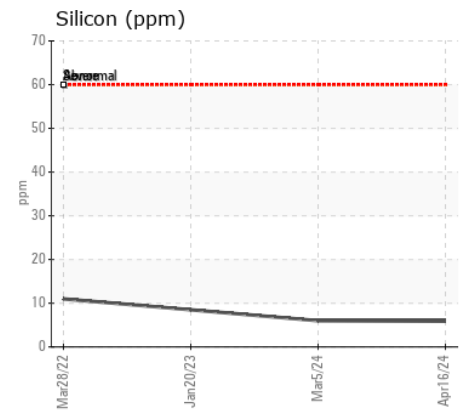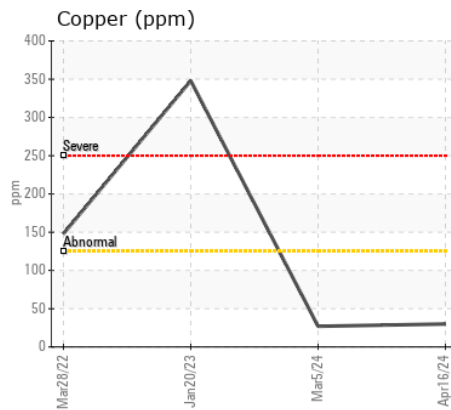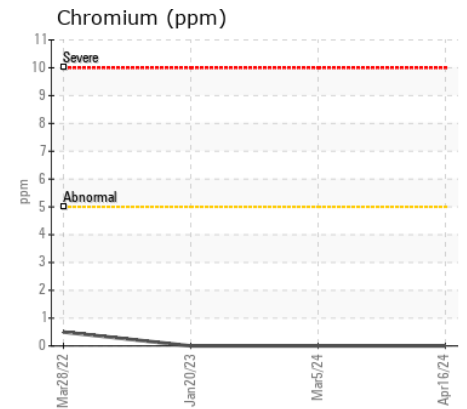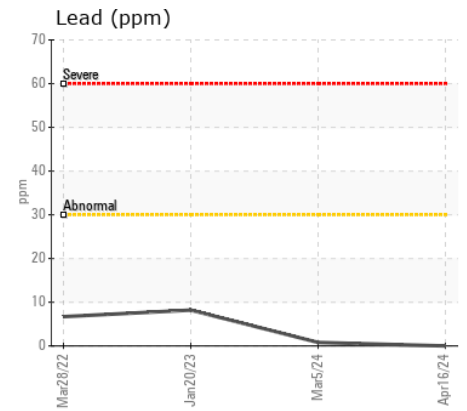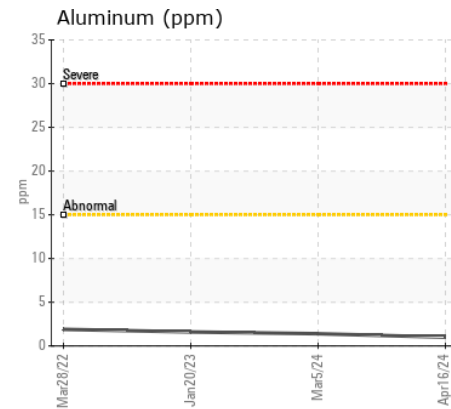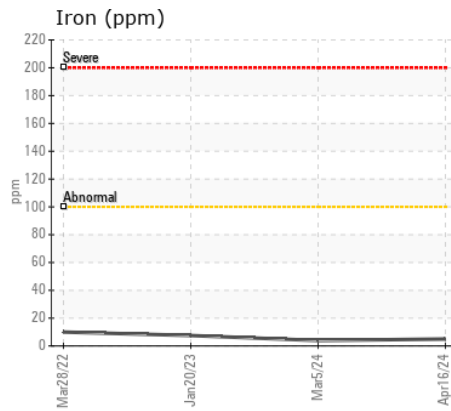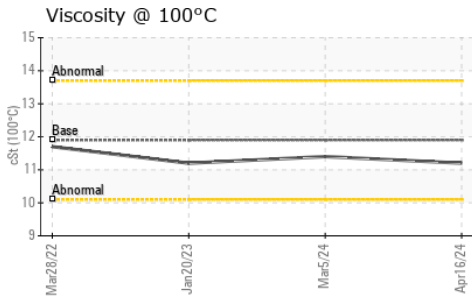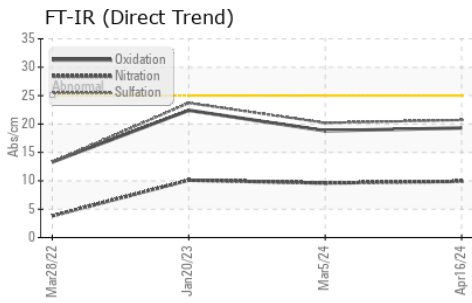

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : LH0286704 **Received** : 17 Apr 2024
Lab Number : 02629508 **Tested** : 17 Apr 2024
Unique Number : 5762640 **Diagnosed** : 17 Apr 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: Visual)

PORT PERRY SALVAGE
 132 REACH INDUSTRIAL PARK
 PORT PERRY, ON
 CA L9L 1B2
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
F: