



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
STELLA JONES [400860]

Machine Id
VOLVO L120H 633407

Component
Diesel Engine

Fluid
VOLVO ULTRA DIESEL ENGINE OIL 15W40 VDS-3 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP380357	VCP393854	---
Sample Date		Client Info		12 Apr 2024	12 Jan 2024	---
Machine Age	hrs	Client Info		1077	648	---
Oil Age	hrs	Client Info		500	500	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	13	34	---
Chromium	ppm	ASTM D5185(m)	>10	<1	4	---
Nickel	ppm	ASTM D5185(m)	>10	<1	<1	---
Titanium	ppm	ASTM D5185(m)		0	0	---
Silver	ppm	ASTM D5185(m)	>2	0	<1	---
Aluminum	ppm	ASTM D5185(m)	>10	8	42	---
Lead	ppm	ASTM D5185(m)	>20	0	3	---
Copper	ppm	ASTM D5185(m)	>15	5	14	---
Tin	ppm	ASTM D5185(m)	>10	<1	3	---
Vanadium	ppm	ASTM D5185(m)		0	0	---
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>20	4	12	---
Potassium	ppm	ASTM D5185(m)	>20	0	2	---
Fuel		WC Method	>6.0	<1.0	<1.0	---
Water		WC Method	>0.1	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	ASTM D7844*	>3	0.1	0.2	---
Nitration	Abs/cm	ASTM D7624*	>20	6.4	7.1	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	22.8	22.3	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	NORML	---
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		2	4	---
Boron	ppm	ASTM D5185(m)	2.5	45	45	---
Barium	ppm	ASTM D5185(m)	0.0	2	14	---
Molybdenum	ppm	ASTM D5185(m)	0.7	39	38	---
Manganese	ppm	ASTM D5185(m)	0.0	<1	2	---
Magnesium	ppm	ASTM D5185(m)	256	524	597	---
Calcium	ppm	ASTM D5185(m)	2057	1688	1536	---
Phosphorus	ppm	ASTM D5185(m)	935	903	949	---
Zinc	ppm	ASTM D5185(m)	1223	1067	1102	---
Sulfur	ppm	ASTM D5185(m)	4079	2443	3179	---
Oxidation	Abs/.1mm	ASTM D7414*	>25	20.5	19.1	---
Visc @ 100°C	cSt	ASTM D7279(m)	15.0	13.1	12.4	---

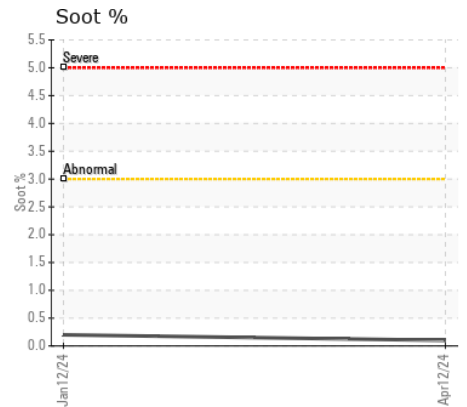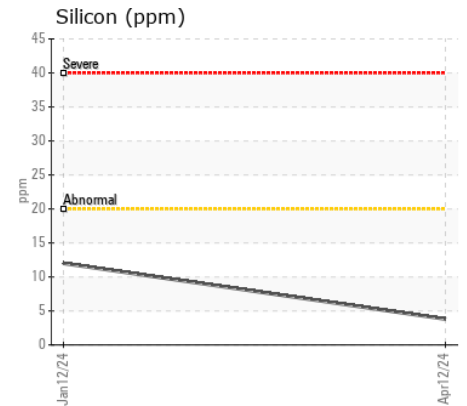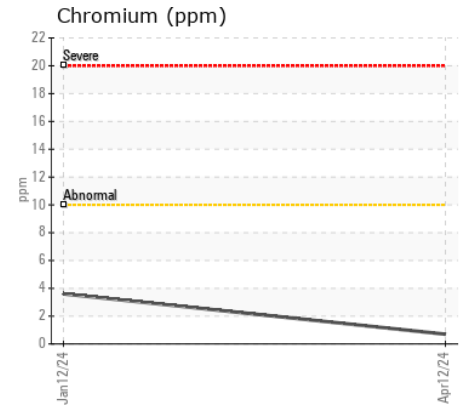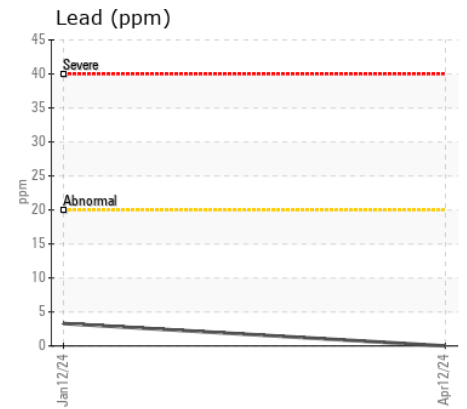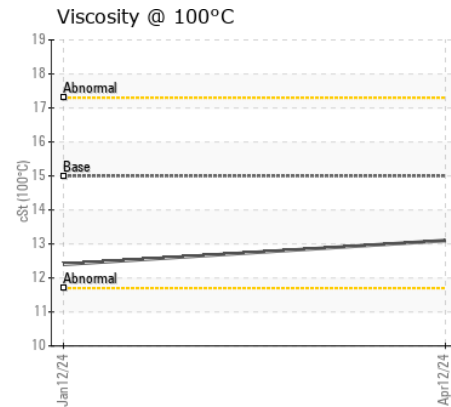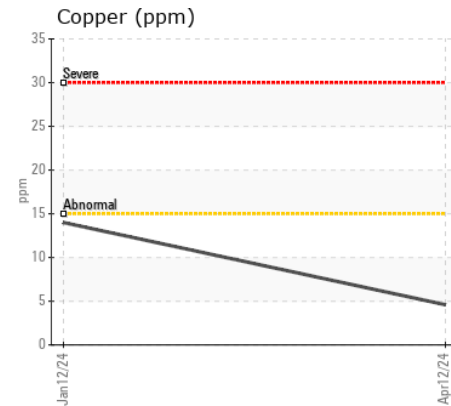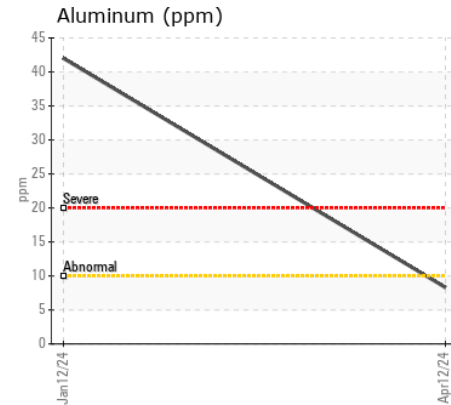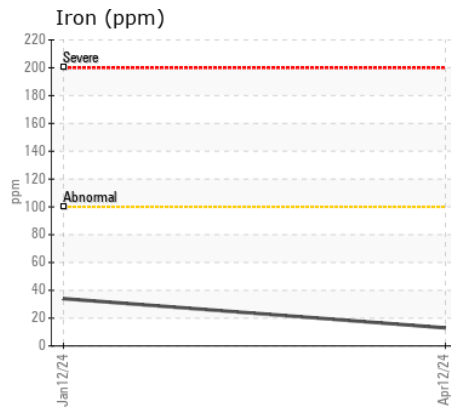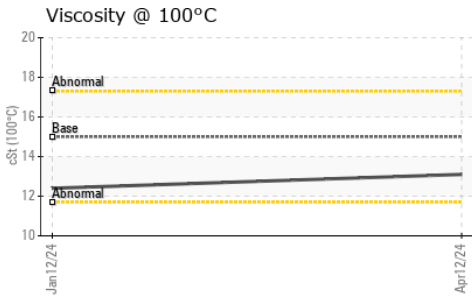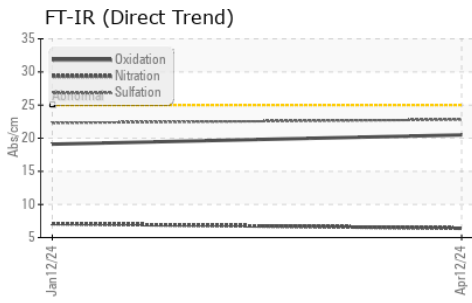

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : VCP380357 **Received** : 17 Apr 2024
Lab Number : 02629551 **Tested** : 17 Apr 2024
Unique Number : 5762683 **Diagnosed** : 17 Apr 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: Visual)

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

Strongco Equipment
 5179 Fountain St N.
 Breslau, ON
 CA N0B 1M0
 Contact: Eric Mailloux
 emailoux@strongco.com
 T: (519)744-3518
 F: (519)744-3284