



OIL ANALYSIS REPORT

| | |
|-----------------|---------------|
| WEAR | NORMAL |
| CONTAMINATION | NORMAL |
| FLUID CONDITION | NORMAL |

Machine Id
KUBOTA RTV-X1140 MCP740
 Component
Diesel Engine
 Fluid
DIESEL ENGINE OIL SAE 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

| Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
|----------------|-----|-------------|-----------|--------------------|-------------|-------------|
| Sample Number | | Client Info | | WC0930764 | WC0902347 | WC0848140 |
| Sample Date | | Client Info | | 15 Apr 2024 | 18 Feb 2024 | 16 Nov 2023 |
| Machine Age | hrs | Client Info | | 4993 | 4672 | 4277 |
| Oil Age | hrs | Client Info | | 0 | 0 | 250 |
| Filter Age | hrs | Client Info | | 0 | 0 | 0 |
| Oil Changed | | Client Info | | N/A | N/A | Changed |
| Filter Changed | | Client Info | | N/A | N/A | Changed |
| Sample Status | | | | NORMAL | NORMAL | MARGINAL |

WEAR

All component wear rates are normal.

| | | | | | | |
|----------|-----|---------------|------|-----------|----|----|
| Iron | ppm | ASTM D5185(m) | >100 | 56 | 56 | 67 |
| Chromium | ppm | ASTM D5185(m) | >20 | 1 | 1 | 2 |
| Nickel | ppm | ASTM D5185(m) | >4 | 0 | <1 | <1 |
| Titanium | ppm | ASTM D5185(m) | | 0 | 0 | 0 |
| Silver | ppm | ASTM D5185(m) | >3 | 0 | 0 | <1 |
| Aluminum | ppm | ASTM D5185(m) | >20 | 7 | 7 | 9 |
| Lead | ppm | ASTM D5185(m) | >40 | 0 | 0 | <1 |
| Copper | ppm | ASTM D5185(m) | >330 | 3 | 5 | 11 |
| Tin | ppm | ASTM D5185(m) | >15 | 0 | 0 | 0 |
| Vanadium | ppm | ASTM D5185(m) | | 0 | 0 | 0 |

CONTAMINATION











There is no indication of any contamination in the oil.

| | | | | | | |
|------------------|----------|---------------|------|----------------|------|------|
| Silicon | ppm | ASTM D5185(m) | >25 | 13 | 13 | 20 |
| Potassium | ppm | ASTM D5185(m) | >20 | <1 | 2 | 2 |
| Fuel | | WC Method | >5 | <1.0 | <1.0 | ▲ 4 |
| Water | | WC Method | >0.2 | NEG | NEG | NEG |
| Glycol | | WC Method | | NEG | NEG | NEG |
| Soot % | % | ASTM D7844* | >3 | 0.8 | 0.8 | 0.8 |
| Nitration | Abs/cm | ASTM D7624* | >20 | 12.4 | 11.6 | 11.4 |
| Sulfation | Abs/.1mm | ASTM D7415* | >30 | 25.3 | 24.8 | 26.1 |
| Emulsified Water | scalar | Visual* | >0.2 | NEG | NEG | NEG |

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

| | | | | | | |
|--------------|----------|---------------|------|--------------|------|------|
| Sodium | ppm | ASTM D5185(m) | >158 | 4 | 3 | 7 |
| Boron | ppm | ASTM D5185(m) | 250 | 33 | 30 | 34 |
| Barium | ppm | ASTM D5185(m) | 10 | 0 | 0 | <1 |
| Molybdenum | ppm | ASTM D5185(m) | 100 | 44 | 45 | 42 |
| Manganese | ppm | ASTM D5185(m) | | <1 | <1 | <1 |
| Magnesium | ppm | ASTM D5185(m) | 450 | 575 | 577 | 523 |
| Calcium | ppm | ASTM D5185(m) | 3000 | 1867 | 1738 | 1721 |
| Phosphorus | ppm | ASTM D5185(m) | 1150 | 756 | 773 | 703 |
| Zinc | ppm | ASTM D5185(m) | 1350 | 933 | 931 | 889 |
| Sulfur | ppm | ASTM D5185(m) | 4250 | 1949 | 2055 | 1897 |
| Oxidation | Abs/.1mm | ASTM D7414* | >25 | 25.2 | 24.1 | 26.8 |
| Visc @ 100°C | cSt | ASTM D7279(m) | 14.4 | 14.0 | 13.7 | 12.8 |

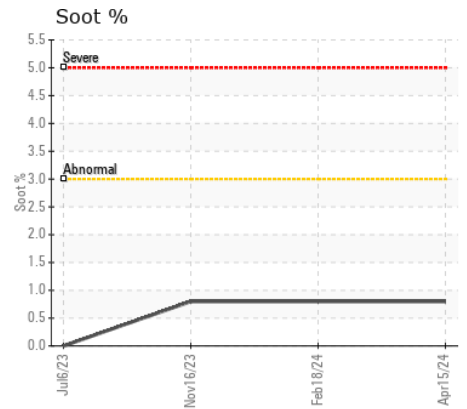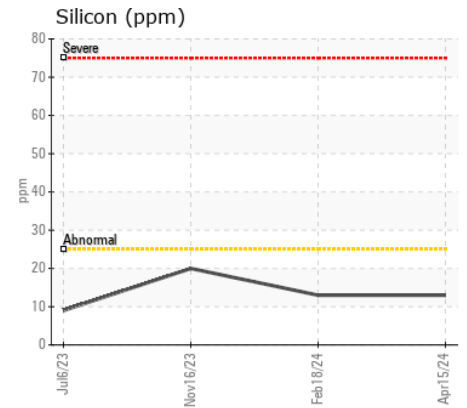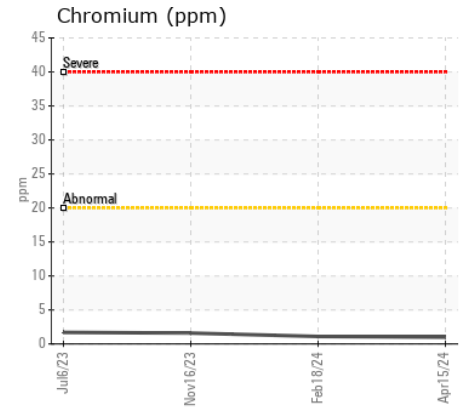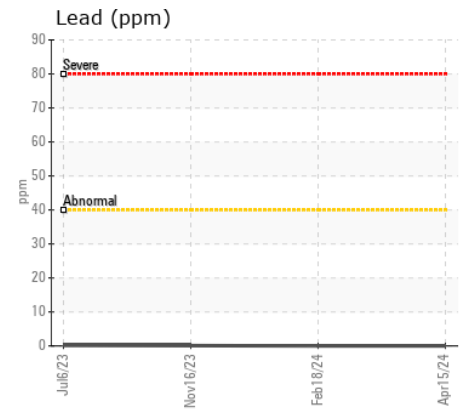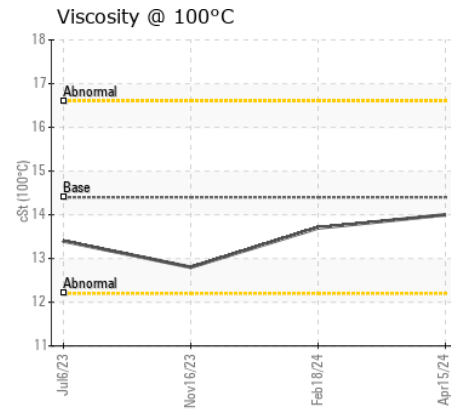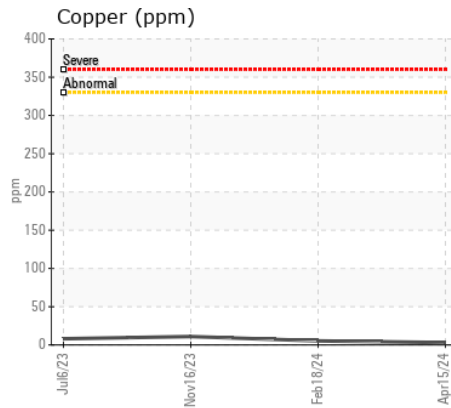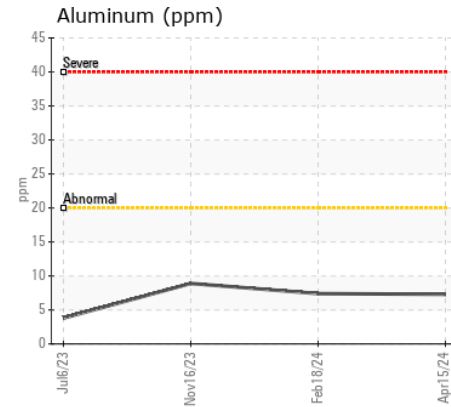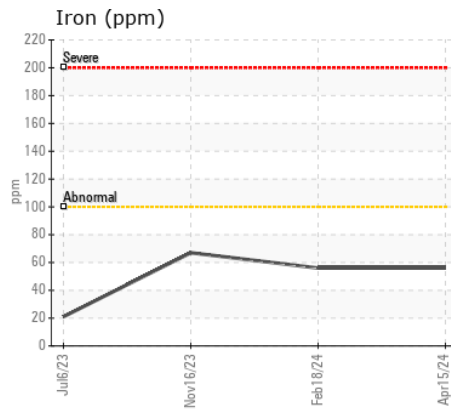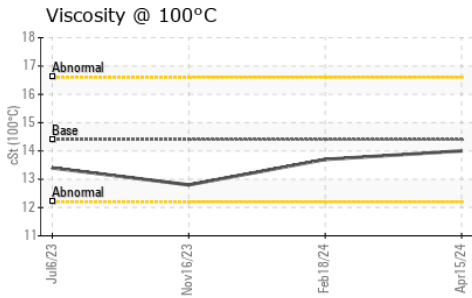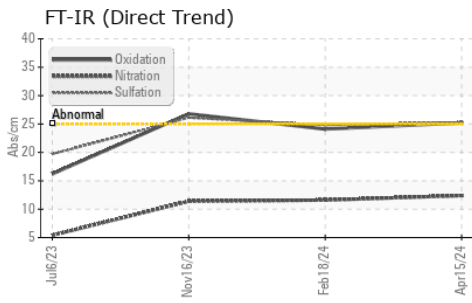

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0930764
Lab Number : 02629581
Unique Number : 5762713
Test Package : MOB 1

Received : 17 Apr 2024
Tested : 17 Apr 2024
Diagnosed : 18 Apr 2024 - Kevin Marson

Agnico Eagle Canada
 1350 Government Rd. W, MACASSA COMPLEX
 Kirkland Lake, ON
 CA P2N 3J1
 Contact: Jay Gould
 MacassaMobileUGPlanning@agnicoeagle.com
 T: (705)567-5208
 F: (705)567-5221

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.