



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
STELLA JONES [400860]
Machine Id
VOLVO L120H 633407
Component
Transmission (Auto)
Fluid
VOLVO EXTRA AUTOMATIC FLUID (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP393872	VCP393822	---
Sample Date		Client Info		12 Apr 2024	12 Jan 2024	---
Machine Age	hrs	Client Info		1077	638	---
Oil Age	hrs	Client Info		1000	500	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Not Changd	Not Changd	---
Filter Changed		Client Info		Not Changd	Changed	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>160	27	23	---
Chromium	ppm	ASTM D5185(m)	>5	0	0	---
Nickel	ppm	ASTM D5185(m)	>5	0	<1	---
Titanium	ppm	ASTM D5185(m)		0	0	---
Silver	ppm	ASTM D5185(m)	>5	0	0	---
Aluminum	ppm	ASTM D5185(m)	>50	3	2	---
Lead	ppm	ASTM D5185(m)	>50	0	<1	---
Copper	ppm	ASTM D5185(m)	>225	6	5	---
Tin	ppm	ASTM D5185(m)	>10	0	0	---
Vanadium	ppm	ASTM D5185(m)		0	0	---
White Metal	scalar	Visual*	NONE	NONE	NONE	---
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	---

CONTAMINATION










There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185(m)	>20	8	9	---
Potassium	ppm	ASTM D5185(m)	>20	1	2	---
Water		WC Method	>0.1	NEG	NEG	---
Silt	scalar	Visual*	NONE	NONE	NONE	---
Debris	scalar	Visual*	NONE	VLITE	NONE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	NORML	---
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	---

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		3	3	---
Boron	ppm	ASTM D5185(m)		78	75	---
Barium	ppm	ASTM D5185(m)		3	3	---
Molybdenum	ppm	ASTM D5185(m)		0	0	---
Manganese	ppm	ASTM D5185(m)		4	4	---
Magnesium	ppm	ASTM D5185(m)		1	2	---
Calcium	ppm	ASTM D5185(m)		74	74	---
Phosphorus	ppm	ASTM D5185(m)		187	185	---
Zinc	ppm	ASTM D5185(m)		14	20	---
Sulfur	ppm	ASTM D5185(m)		1622	1758	---
Visc @ 40°C	cSt	ASTM D7279(m)		28.4	28.6	---

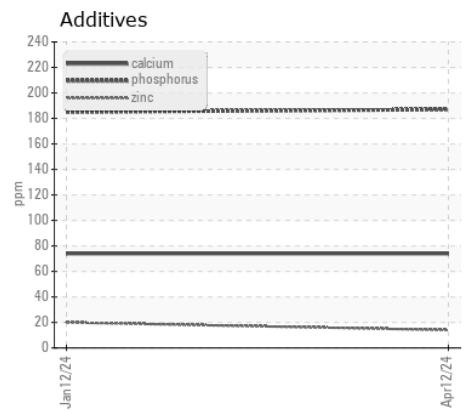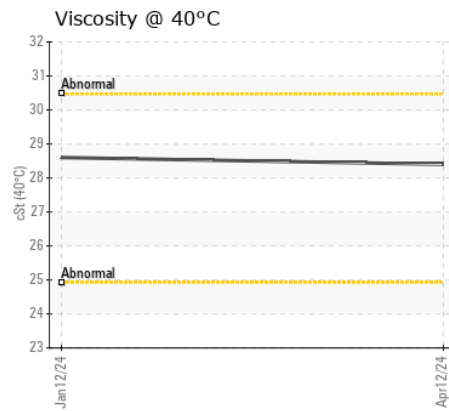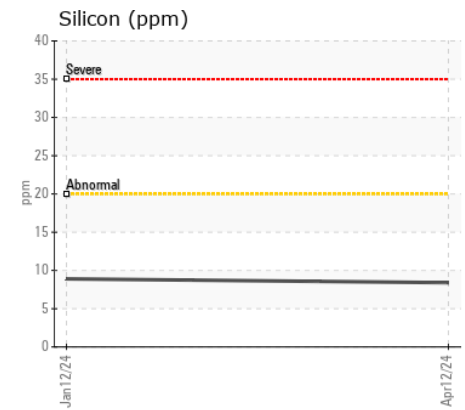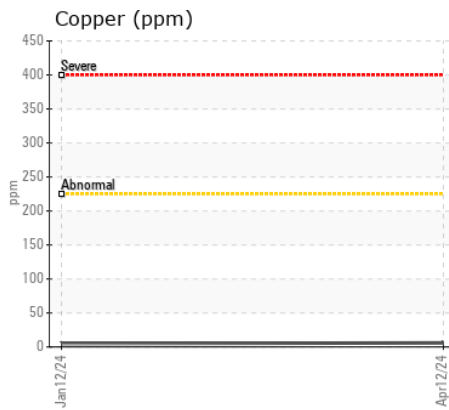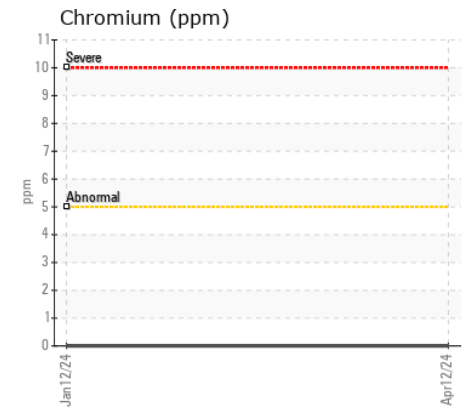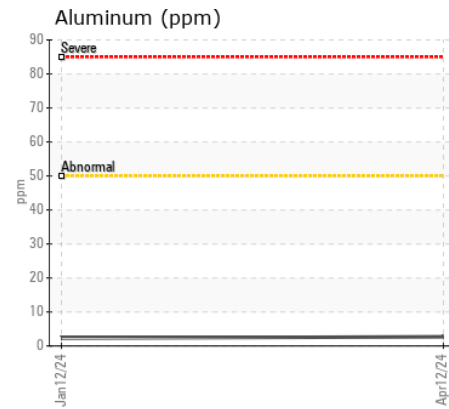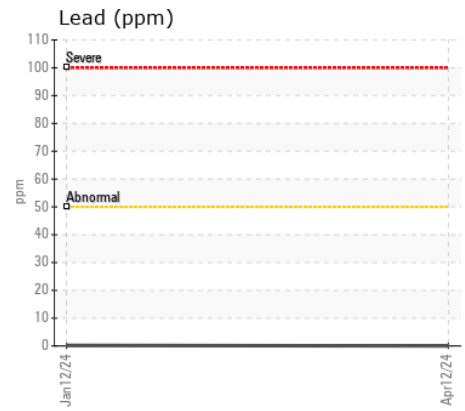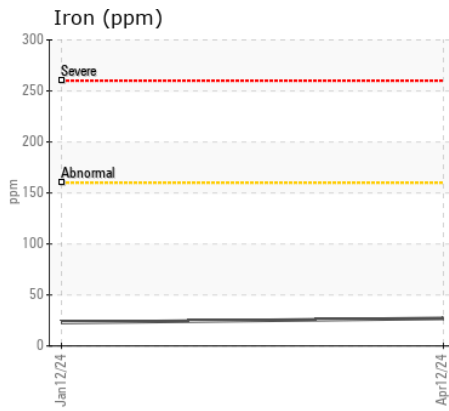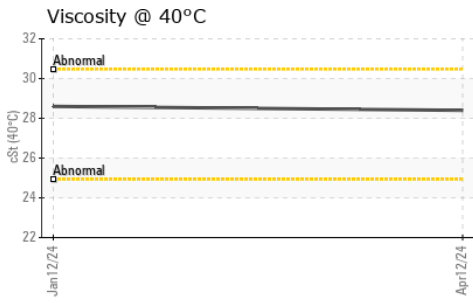

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : VCP393872 **Received** : 17 Apr 2024
Lab Number : 02629690 **Tested** : 18 Apr 2024
Unique Number : 5762822 **Diagnosed** : 18 Apr 2024 - Wes Davis
Test Package : MOB 1

Strongco Equipment
 5179 Fountain St N.
 Breslau, ON
 CA N0B 1M0
 Contact: Eric Mailloux
 emailoux@strongco.com
 T: (519)744-3518
 F: (519)744-3284

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.