



LIEBHERR

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
LIEBHERR LH30M 114790-1253

Component
Rear Right Wheel Hub

Fluid
PETRO CANADA TRAXON 75W90 SYNTHETIC (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH0288039	LH0242112	LH0250470
Sample Date		Client Info		12 Apr 2024	10 Oct 2023	24 Mar 2023
Machine Age	hrs	Client Info		9051	7937	6744
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		None	None	None
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>450	7	6	97
Chromium	ppm	ASTM D5185(m)	>4	0	0	<1
Nickel	ppm	ASTM D5185(m)	>2	0	<1	<1
Titanium	ppm	ASTM D5185(m)		0	0	<1
Silver	ppm	ASTM D5185(m)		0	<1	0
Aluminum	ppm	ASTM D5185(m)	>15	0	0	<1
Lead	ppm	ASTM D5185(m)	>4	0	0	<1
Copper	ppm	ASTM D5185(m)	>75	<1	<1	7
Tin	ppm	ASTM D5185(m)		0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	NONE	VLITE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>60	<1	1	6
Potassium	ppm	ASTM D5185(m)	>20	0	0	<1
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		2	2	5
Boron	ppm	ASTM D5185(m)	328	165	252	105
Barium	ppm	ASTM D5185(m)	1	0	<1	<1
Molybdenum	ppm	ASTM D5185(m)		0	0	0
Manganese	ppm	ASTM D5185(m)		0	0	1
Magnesium	ppm	ASTM D5185(m)	1	1	1	2
Calcium	ppm	ASTM D5185(m)	7	27	56	214
Phosphorus	ppm	ASTM D5185(m)	1145	1766	1430	2104
Zinc	ppm	ASTM D5185(m)	3	7	8	58
Sulfur	ppm	ASTM D5185(m)	17909	23086	21990	24190
Visc @ 40°C	cSt	ASTM D7279(m)	99.6	136	116	148

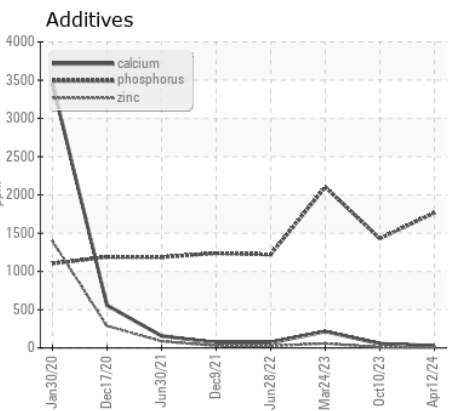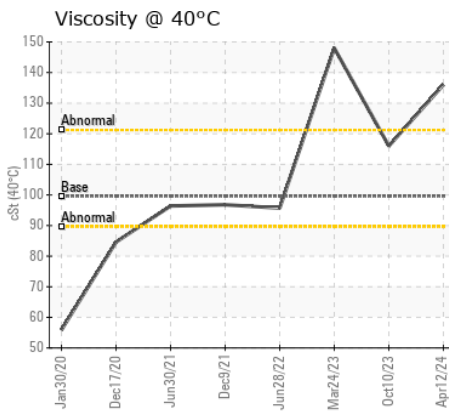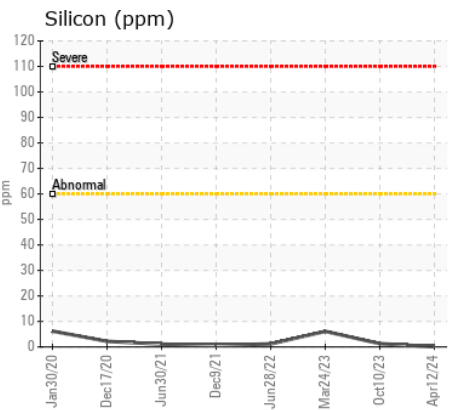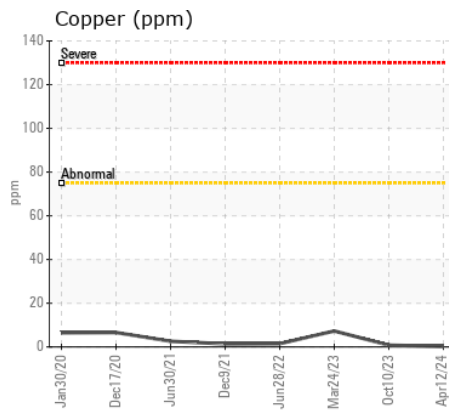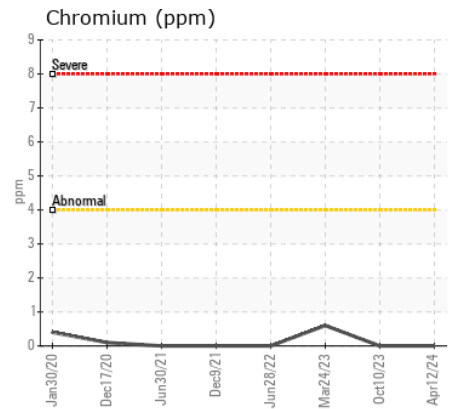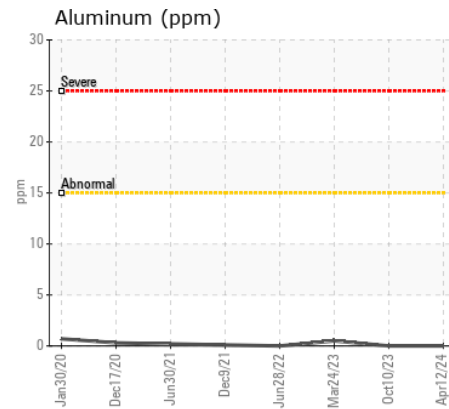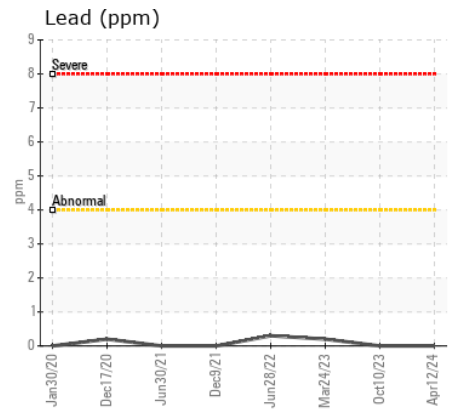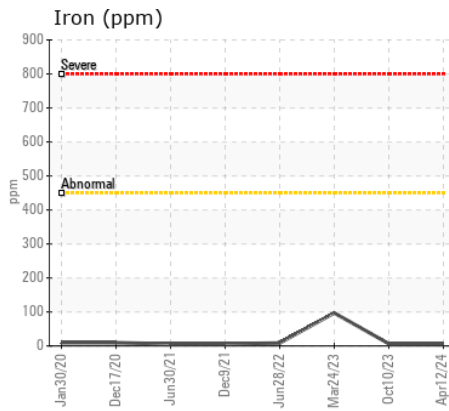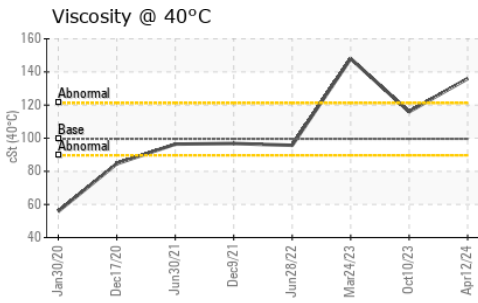

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : LH0288039
Lab Number : 02629705
Unique Number : 5762837
Test Package : MOB 1
Received : 17 Apr 2024
Tested : 17 Apr 2024
Diagnosed : 17 Apr 2024 - Kevin Marson

DAVIS TRADING & SUPPLY LTD.
 110 GRANT STREET
 VANCOUVER, BC
 CA V6A 2J6
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
F: