



LIEBHERR

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
LIEBHERR LH30M 146757

Component
Splitter Box

Fluid
PETRO CANADA TRAXON 75W90 SYNTHETIC (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH0270284	LH0144130	---
Sample Date		Client Info		08 Mar 2024	16 Aug 2023	---
Machine Age	hrs	Client Info		1518	507	---
Oil Age	hrs	Client Info		0	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Not Changed	Changed	---
Filter Changed		Client Info		None	None	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	15	23	---
Chromium	ppm	ASTM D5185(m)	>5	0	0	---
Nickel	ppm	ASTM D5185(m)	>5	0	0	---
Titanium	ppm	ASTM D5185(m)		0	0	---
Silver	ppm	ASTM D5185(m)		0	0	---
Aluminum	ppm	ASTM D5185(m)	>20	0	<1	---
Lead	ppm	ASTM D5185(m)	>30	0	0	---
Copper	ppm	ASTM D5185(m)	>20	<1	1	---
Tin	ppm	ASTM D5185(m)	>10	0	0	---
Vanadium	ppm	ASTM D5185(m)		0	0	---
White Metal	scalar	Visual*	NONE	NONE	NONE	---
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	---

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>30	0	<1	---
Potassium	ppm	ASTM D5185(m)	>20	2	2	---
Water		WC Method	>0.1	NEG	NEG	---
Silt	scalar	Visual*	NONE	NONE	NONE	---
Debris	scalar	Visual*	NONE	NONE	NONE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	NORML	---
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)	>25	2	3	---
Boron	ppm	ASTM D5185(m)	328	164	1	---
Barium	ppm	ASTM D5185(m)	1	0	0	---
Molybdenum	ppm	ASTM D5185(m)		0	0	---
Manganese	ppm	ASTM D5185(m)		<1	3	---
Magnesium	ppm	ASTM D5185(m)	1	1	2	---
Calcium	ppm	ASTM D5185(m)	7	12	16	---
Phosphorus	ppm	ASTM D5185(m)	1145	1204	1641	---
Zinc	ppm	ASTM D5185(m)	3	16	32	---
Sulfur	ppm	ASTM D5185(m)	17909	21009	22874	---
Visc @ 40°C	cSt	ASTM D7279(m)	99.6	107	197	---

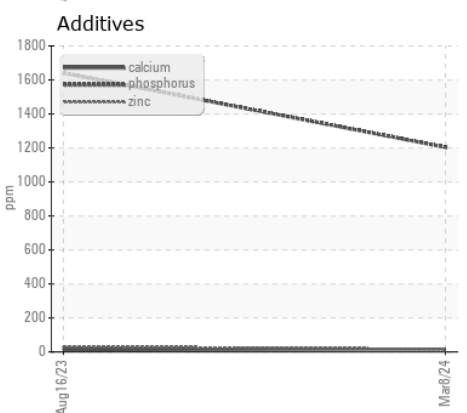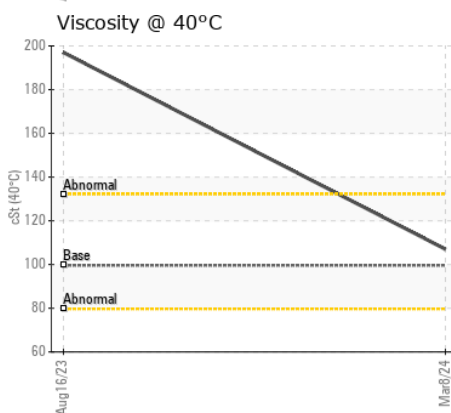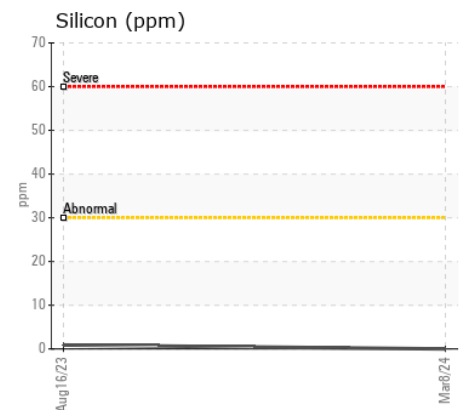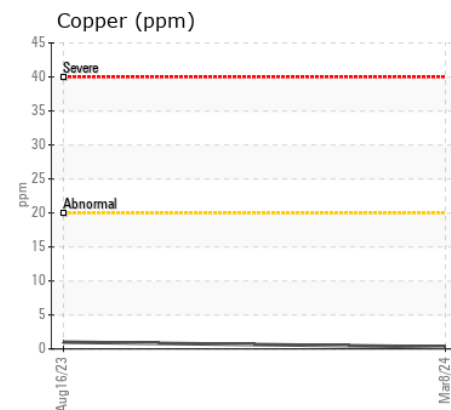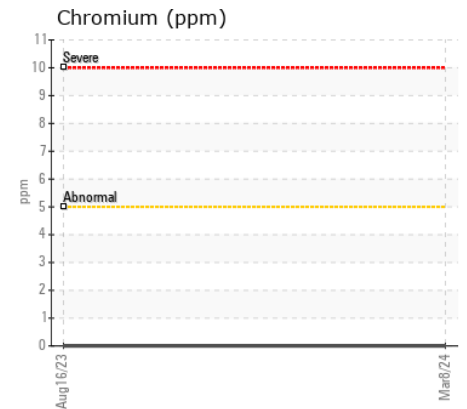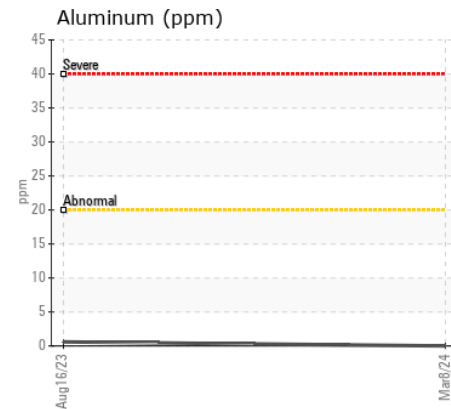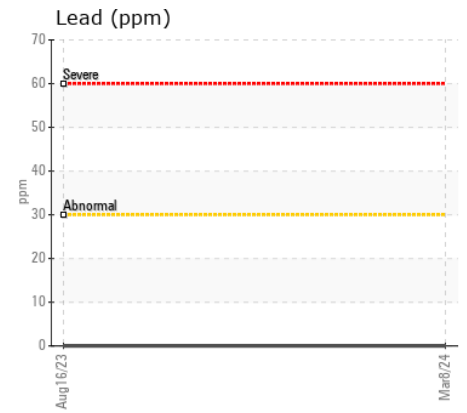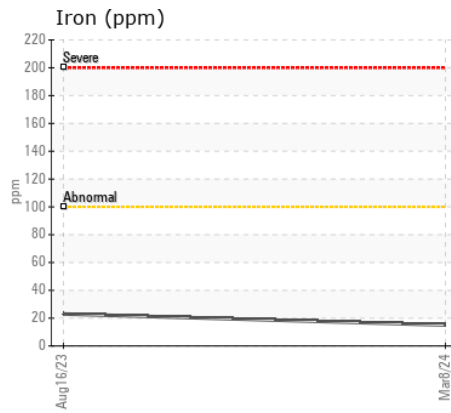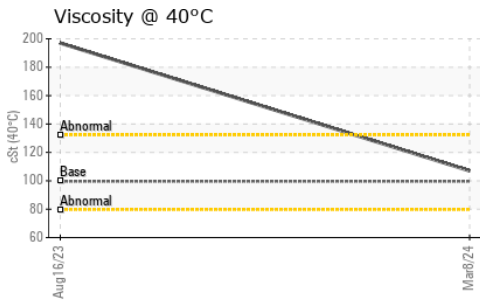

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : LH0270284 **Received** : 17 Apr 2024
Lab Number : 02629709 **Tested** : 17 Apr 2024
Unique Number : 5762841 **Diagnosed** : 17 Apr 2024 - Wes Davis
Test Package : MOB 1

Palmer
 3191 Albion Road
 Ottawa, ON
 CA K1V 8Y3
 Contact: Service

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
F: