



LIEBHERR

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
LIEBHERR PR716 018429-1422
Component
Right Final Drive
Fluid
LIEBHERR HYPOID 85W-140 EP (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH0288279	---	---
Sample Date		Client Info		15 Apr 2024	---	---
Machine Age	hrs	Client Info		886	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Not Changd	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>500	144	---	---
Chromium	ppm	ASTM D5185(m)	>10	1	---	---
Nickel	ppm	ASTM D5185(m)	>10	2	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)		0	---	---
Aluminum	ppm	ASTM D5185(m)	>25	0	---	---
Lead	ppm	ASTM D5185(m)	>25	3	---	---
Copper	ppm	ASTM D5185(m)	>50	124	---	---
Tin	ppm	ASTM D5185(m)	>10	4	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>75	3	---	---
Potassium	ppm	ASTM D5185(m)	>20	3	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	Visual*	NONE	VLITE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		5	---	---
Boron	ppm	ASTM D5185(m)	<1	4	---	---
Barium	ppm	ASTM D5185(m)	0	50	---	---
Molybdenum	ppm	ASTM D5185(m)	0	0	---	---
Manganese	ppm	ASTM D5185(m)	0	2	---	---
Magnesium	ppm	ASTM D5185(m)	<1	3	---	---
Calcium	ppm	ASTM D5185(m)	17	20	---	---
Phosphorus	ppm	ASTM D5185(m)	1089	1104	---	---
Zinc	ppm	ASTM D5185(m)	4	52	---	---
Sulfur	ppm	ASTM D5185(m)	23480	24287	---	---
Visc @ 40°C	cSt	ASTM D7279(m)	375	322	---	---

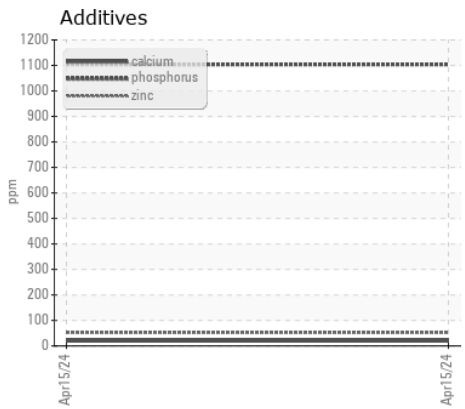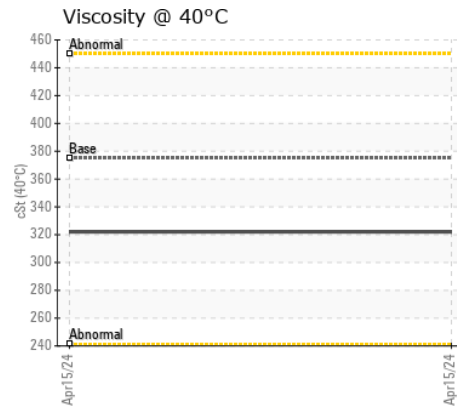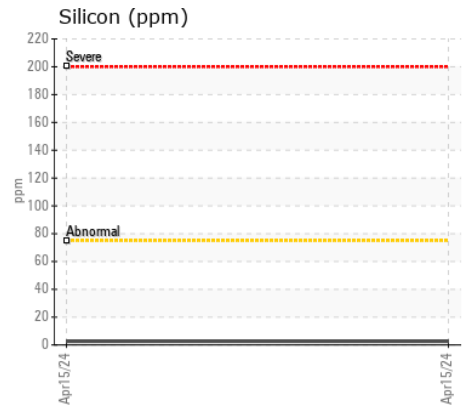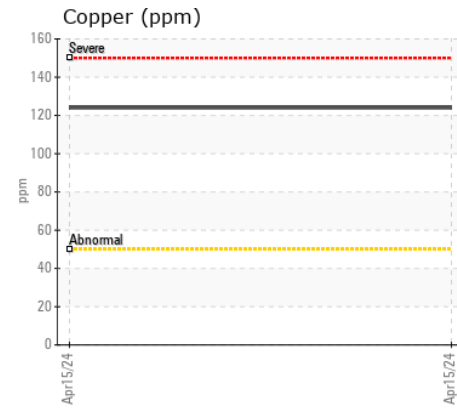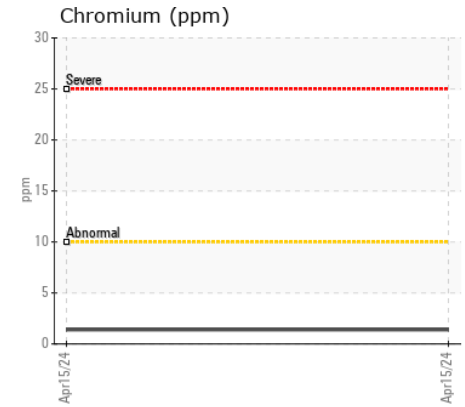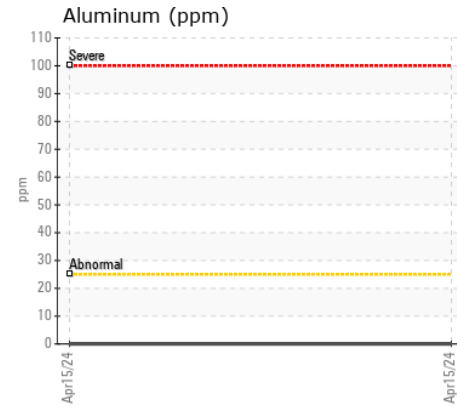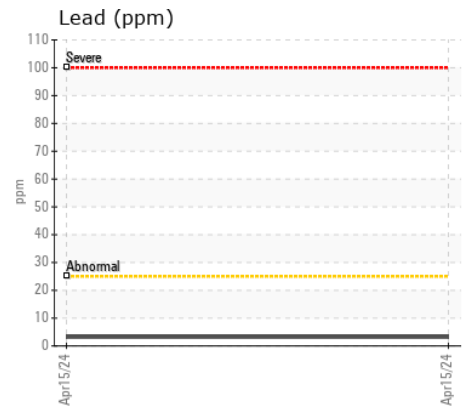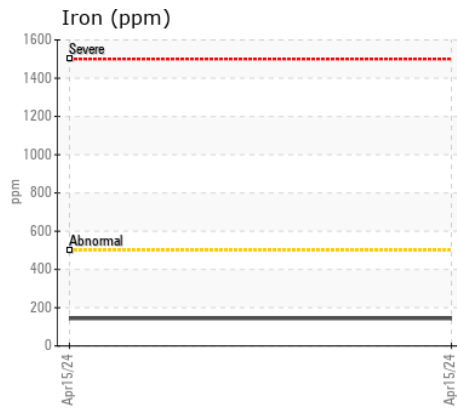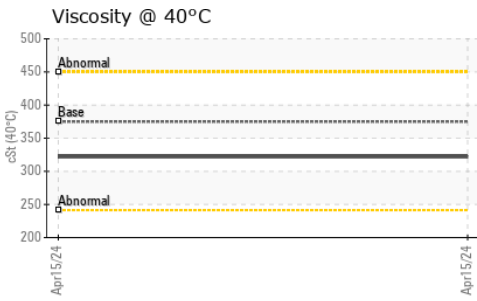

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : LH0288279
Lab Number : 02629716
Unique Number : 5762848
Test Package : MOB 1

COLOURED AGGREGATES INC.
 158 DON HILLOCK DRIVE,, UNIT 12-13
 AURORA, ON
 CA L4G 0H6
 Contact: Jeff Oravec
 Jeff@colouredaggregates.com
 T: (416)491-0230
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.