



# VOLVO

## OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**632605**  
Component  
**Front Axle**  
Fluid  
**TRANSAXLE OIL SAE 75W80 (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) TRANSAXLE OIL SAE 75W80. Please confirm.

### WEAR

All component wear rates are normal.










### CONTAMINATION

There is no indication of any contamination in the oil.

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>VCP380174</b>	---	---
Sample Date		Client Info		<b>04 Apr 2024</b>	---	---
Machine Age	hrs	Client Info		<b>12617</b>	---	---
Oil Age	hrs	Client Info		<b>1000</b>	---	---
Filter Age	hrs	Client Info		<b>0</b>	---	---
Oil Changed		Client Info		<b>Not Changed</b>	---	---
Filter Changed		Client Info		<b>Not Changed</b>	---	---
Sample Status				<b>NORMAL</b>	---	---
<hr/>						
Iron	ppm	ASTM D5185(m)	>500	<b>21</b>	---	---
Chromium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	---	---
Nickel	ppm	ASTM D5185(m)	>10	<b>0</b>	---	---
Titanium	ppm	ASTM D5185(m)		<b>0</b>	---	---
Silver	ppm	ASTM D5185(m)		<b>0</b>	---	---
Aluminum	ppm	ASTM D5185(m)	>30	<b>1</b>	---	---
Lead	ppm	ASTM D5185(m)	>50	<b>0</b>	---	---
Copper	ppm	ASTM D5185(m)	>120	<b>&lt;1</b>	---	---
Tin	ppm	ASTM D5185(m)	>20	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	---	---
White Metal	scalar	Visual*	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	---	---
<hr/>						
Silicon	ppm	ASTM D5185(m)	>50	<b>12</b>	---	---
Potassium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	---	---
Water		WC Method	>0.2	<b>NEG</b>	---	---
Silt	scalar	Visual*	NONE	<b>NONE</b>	---	---
Debris	scalar	Visual*	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	Visual*	NONE	<b>VLITE</b>	---	---
Appearance	scalar	Visual*	NORML	<b>NORML</b>	---	---
Odor	scalar	Visual*	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	---	---
<hr/>						
Sodium	ppm	ASTM D5185(m)		<b>&lt;1</b>	---	---
Boron	ppm	ASTM D5185(m)	160	<b>106</b>	---	---
Barium	ppm	ASTM D5185(m)	10	<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185(m)	25	<b>0</b>	---	---
Manganese	ppm	ASTM D5185(m)		<b>&lt;1</b>	---	---
Magnesium	ppm	ASTM D5185(m)	12	<b>17</b>	---	---
Calcium	ppm	ASTM D5185(m)	3750	<b>4315</b>	---	---
Phosphorus	ppm	ASTM D5185(m)	1200	<b>1245</b>	---	---
Zinc	ppm	ASTM D5185(m)	1500	<b>1575</b>	---	---
Sulfur	ppm	ASTM D5185(m)	6000	<b>3484</b>	---	---
Visc @ 40°C	cSt	ASTM D7279(m)	48	<b>42.3</b>	---	---

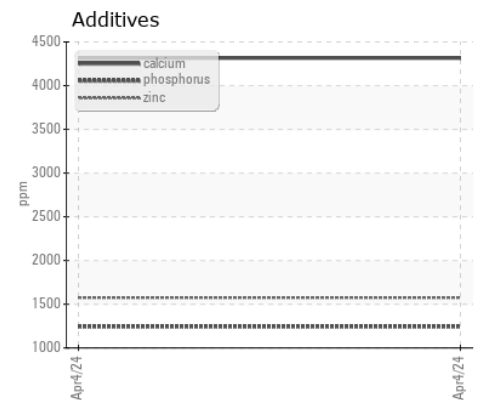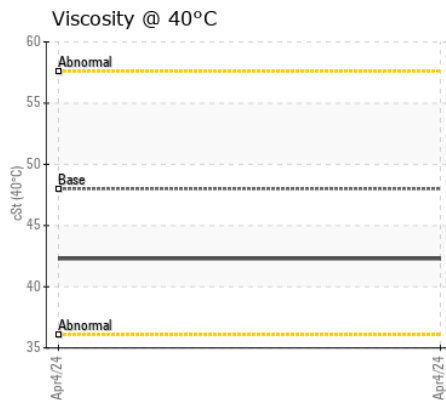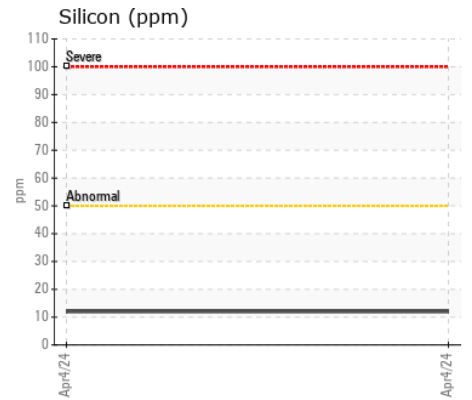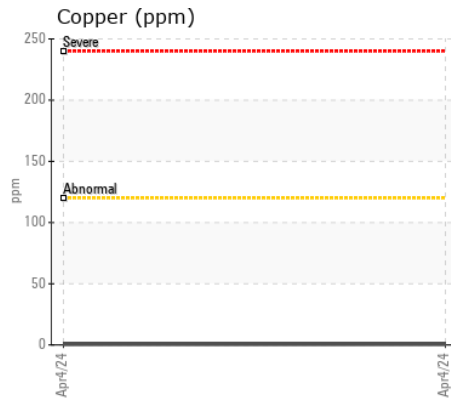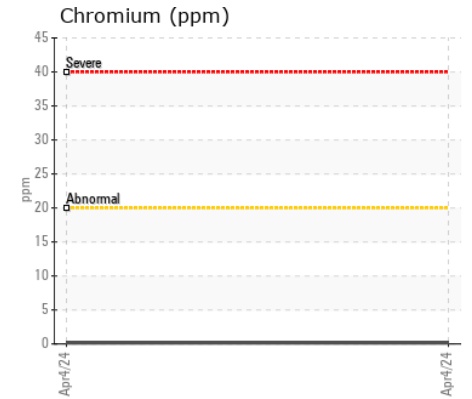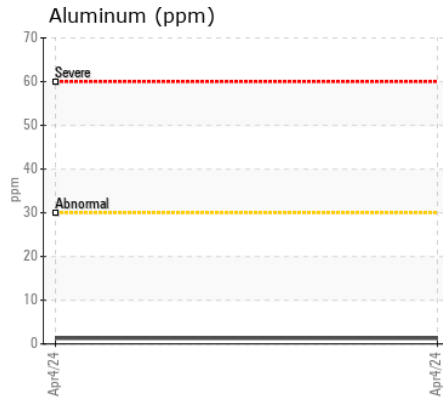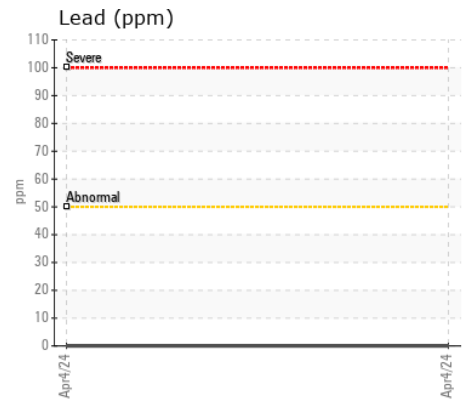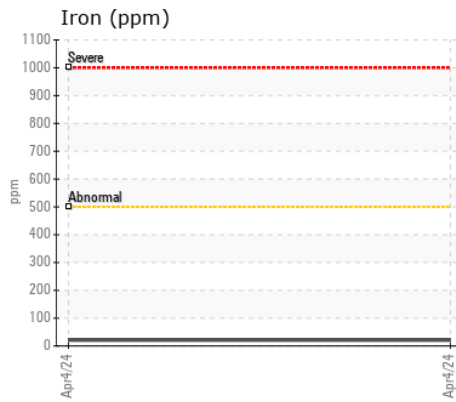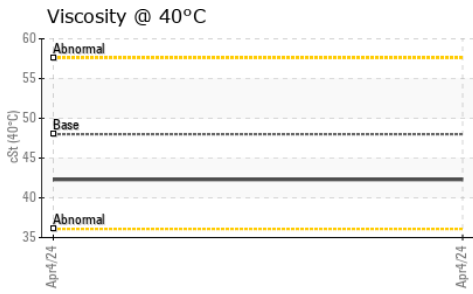

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : VCP380174  
**Lab Number** : 02629722  
**Unique Number** : 5762854  
**Test Package** : MOB 1  
**Received** : 17 Apr 2024  
**Tested** : 17 Apr 2024  
**Diagnosed** : 17 Apr 2024 - Wes Davis

**GREAT WEST EQUIPMENT**  
 1600 KOSMINA ROAD, 123 L&A CROSS RD  
 VERNON, BC  
 CA V1T 8T2  
 Contact: Sarah Lawrence  
 slawrence@gwequipment.com  
 T: (866)627-2357  
 F: (250)549-3397

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.