



LIEBHERR

OIL ANALYSIS REPORT

| | |
|-----------------|--------|
| WEAR | NORMAL |
| CONTAMINATION | NORMAL |
| FLUID CONDITION | NORMAL |



Machine Id
LIEBHERR LH22M 158368-1250
Component
Rear Left Wheel Hub
Fluid
{not provided} (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

| Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
|----------------|-----|-------------|-----------|-------------|----------|----------|
| Sample Number | | Client Info | | LH0284724 | --- | --- |
| Sample Date | | Client Info | | 10 Apr 2024 | --- | --- |
| Machine Age | hrs | Client Info | | 500 | --- | --- |
| Oil Age | hrs | Client Info | | 0 | --- | --- |
| Filter Age | hrs | Client Info | | 0 | --- | --- |
| Oil Changed | | Client Info | | N/A | --- | --- |
| Filter Changed | | Client Info | | N/A | --- | --- |
| Sample Status | | | | NORMAL | --- | --- |

WEAR

All component wear rates are normal.

| | | | | | | |
|--------------|--------|---------------|------|------|-----|-----|
| Iron | ppm | ASTM D5185(m) | >650 | 15 | --- | --- |
| Chromium | ppm | ASTM D5185(m) | >4 | 0 | --- | --- |
| Nickel | ppm | ASTM D5185(m) | >4 | 0 | --- | --- |
| Titanium | ppm | ASTM D5185(m) | >4 | 0 | --- | --- |
| Silver | ppm | ASTM D5185(m) | | 0 | --- | --- |
| Aluminum | ppm | ASTM D5185(m) | >25 | <1 | --- | --- |
| Lead | ppm | ASTM D5185(m) | >4 | 0 | --- | --- |
| Copper | ppm | ASTM D5185(m) | >60 | 4 | --- | --- |
| Tin | ppm | ASTM D5185(m) | >4 | 0 | --- | --- |
| Vanadium | ppm | ASTM D5185(m) | | 0 | --- | --- |
| White Metal | scalar | Visual* | NONE | NONE | --- | --- |
| Yellow Metal | scalar | Visual* | NONE | NONE | --- | --- |

CONTAMINATION










There is no indication of any contamination in the oil.

| | | | | | | |
|------------------|--------|---------------|-------|-------|-----|-----|
| Silicon | ppm | ASTM D5185(m) | >75 | 5 | --- | --- |
| Potassium | ppm | ASTM D5185(m) | >20 | <1 | --- | --- |
| Water | | WC Method | >0.2 | NEG | --- | --- |
| Silt | scalar | Visual* | NONE | NONE | --- | --- |
| Debris | scalar | Visual* | NONE | VLITE | --- | --- |
| Sand/Dirt | scalar | Visual* | NONE | NONE | --- | --- |
| Appearance | scalar | Visual* | NORML | NORML | --- | --- |
| Odor | scalar | Visual* | NORML | NORML | --- | --- |
| Emulsified Water | scalar | Visual* | >0.2 | NEG | --- | --- |

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

| | | | | | | |
|-------------|-----|---------------|--|------|-----|-----|
| Sodium | ppm | ASTM D5185(m) | | 15 | --- | --- |
| Boron | ppm | ASTM D5185(m) | | 107 | --- | --- |
| Barium | ppm | ASTM D5185(m) | | 1 | --- | --- |
| Molybdenum | ppm | ASTM D5185(m) | | 0 | --- | --- |
| Manganese | ppm | ASTM D5185(m) | | 5 | --- | --- |
| Magnesium | ppm | ASTM D5185(m) | | 10 | --- | --- |
| Calcium | ppm | ASTM D5185(m) | | 3487 | --- | --- |
| Phosphorus | ppm | ASTM D5185(m) | | 1148 | --- | --- |
| Zinc | ppm | ASTM D5185(m) | | 1393 | --- | --- |
| Sulfur | ppm | ASTM D5185(m) | | 2980 | --- | --- |
| Visc @ 40°C | cSt | ASTM D7279(m) | | 65.5 | --- | --- |

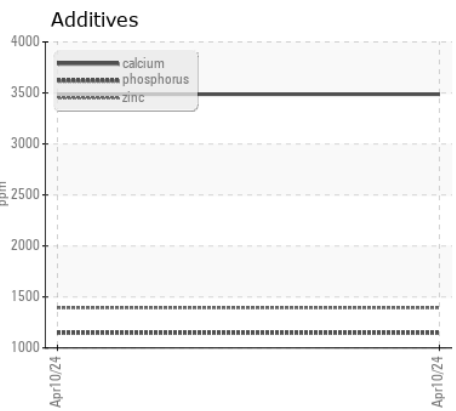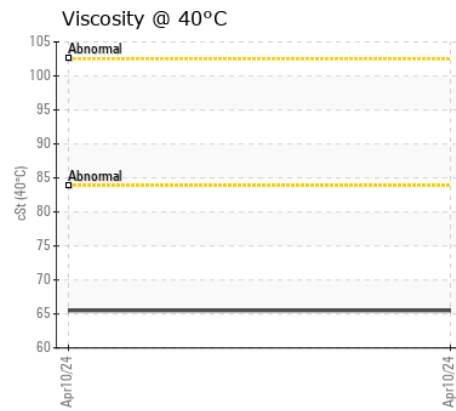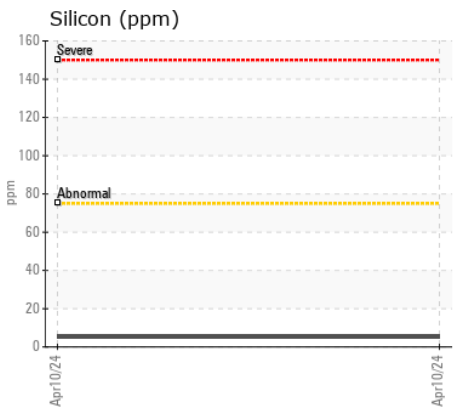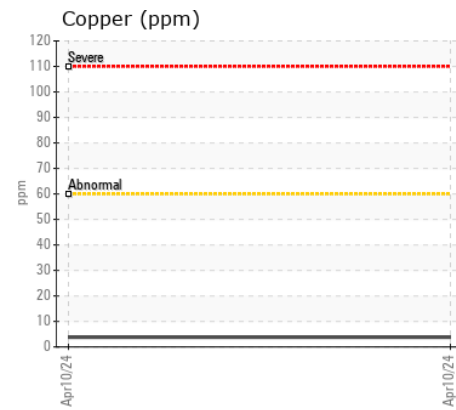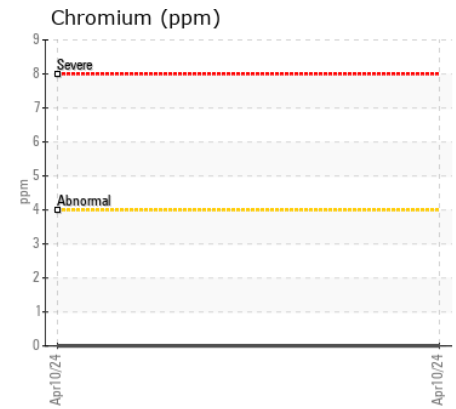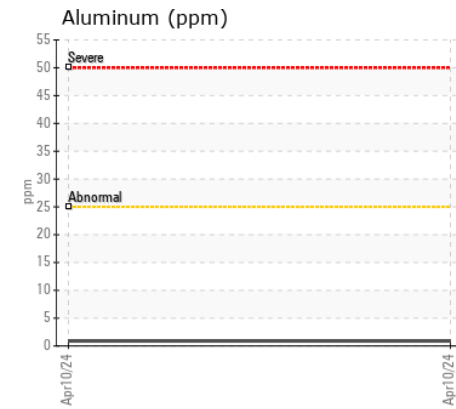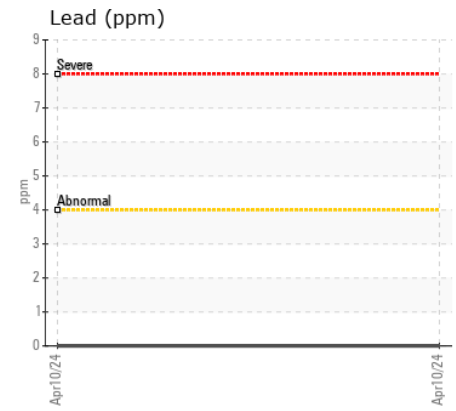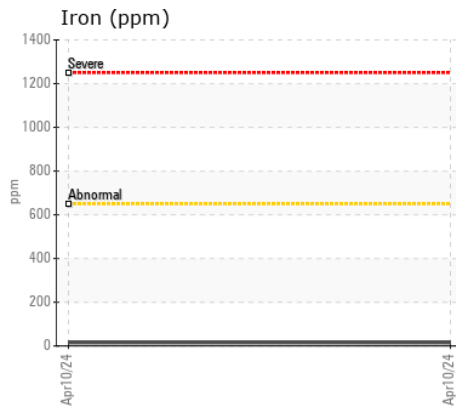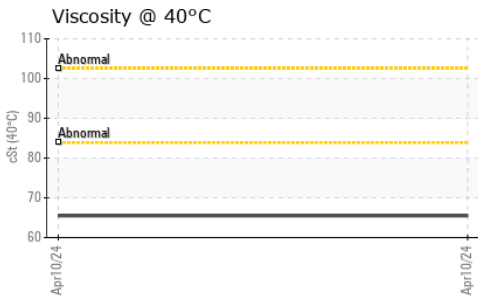

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : LH0284724
Lab Number : 02629726
Unique Number : 5762858
Test Package : MOBCE (Additional Tests: Visual)

BELLEMARE RECYCLAGE - SABLE DES FORGES INC
 8750 BOUL INDUSTRIEL
 TROIS-RIVIERES, QC
 CA G9A 5E1
 Contact: Sacha Bellemare
 sachabellemare@groupebellemare.com
 T: (819)296-3767
 F: (819)296-1116

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.