



LIEBHERR

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
LIEBHERR LH30M 090077
Component
Front Right Wheel Hub
Fluid
GEAR OIL SAE 75W90 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH0276292	LH	---
Sample Date		Client Info		16 Apr 2024	05 Jan 2022	---
Machine Age	hrs	Client Info		6756	5072	---
Oil Age	hrs	Client Info		0	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		None	None	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>450	15	40	---
Chromium	ppm	ASTM D5185(m)	>4	0	<1	---
Nickel	ppm	ASTM D5185(m)	>2	0	<1	---
Titanium	ppm	ASTM D5185(m)		0	0	---
Silver	ppm	ASTM D5185(m)		0	<1	---
Aluminum	ppm	ASTM D5185(m)	>15	0	<1	---
Lead	ppm	ASTM D5185(m)	>4	0	<1	---
Copper	ppm	ASTM D5185(m)	>75	2	5	---
Tin	ppm	ASTM D5185(m)		0	0	---
Vanadium	ppm	ASTM D5185(m)		0	0	---
White Metal	scalar	Visual*	NONE	VLITE	VLITE	---
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	---

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>60	0	2	---
Potassium	ppm	ASTM D5185(m)	>20	0	<1	---
Water		WC Method	>0.2	NEG	NEG	---
Silt	scalar	Visual*	NONE	VLITE	NONE	---
Debris	scalar	Visual*	NONE	NONE	NONE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	NORML	---
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		4	7	---
Boron	ppm	ASTM D5185(m)	400	316	306	---
Barium	ppm	ASTM D5185(m)	200	<1	<1	---
Molybdenum	ppm	ASTM D5185(m)	12	0	0	---
Manganese	ppm	ASTM D5185(m)		0	<1	---
Magnesium	ppm	ASTM D5185(m)	12	1	3	---
Calcium	ppm	ASTM D5185(m)	150	36	238	---
Phosphorus	ppm	ASTM D5185(m)	1650	1250	1366	---
Zinc	ppm	ASTM D5185(m)	125	16	50	---
Sulfur	ppm	ASTM D5185(m)	22500	21223	21409	---
Visc @ 40°C	cSt	ASTM D7279(m)	109	102	99.0	---

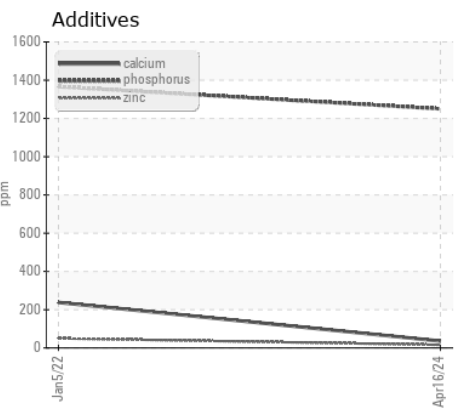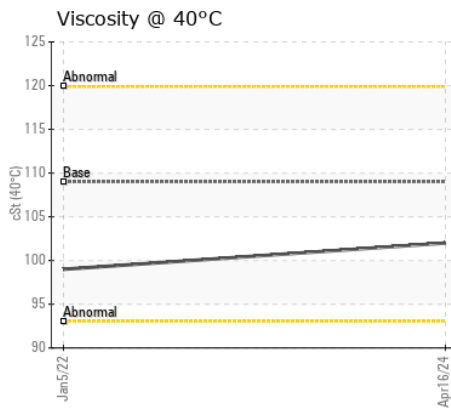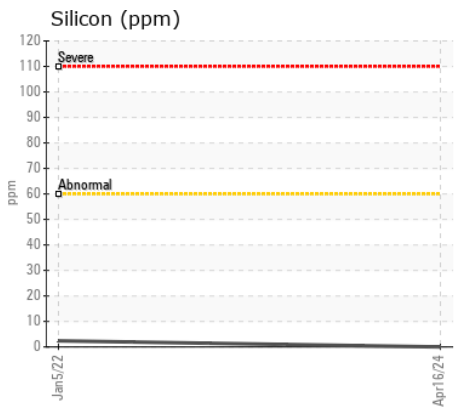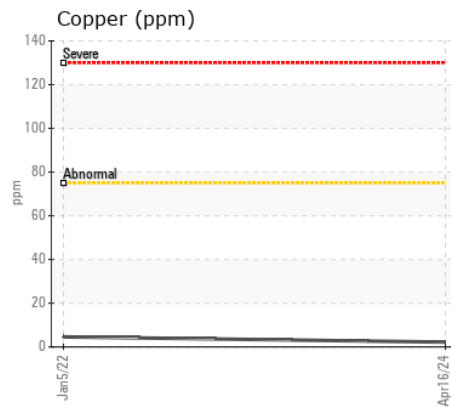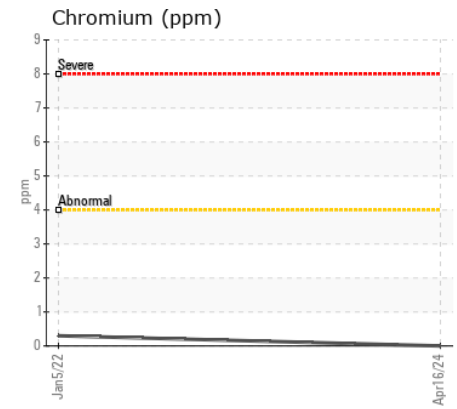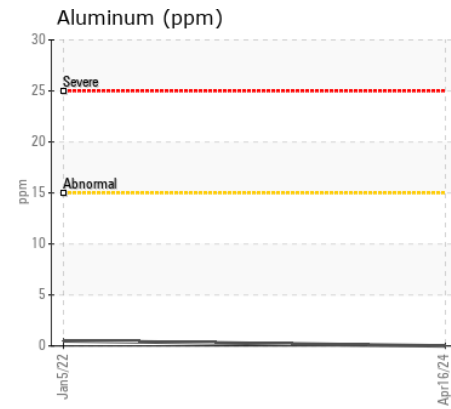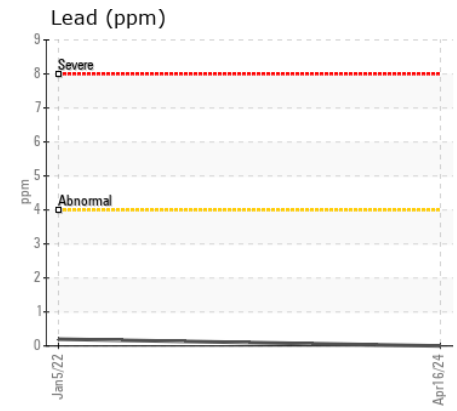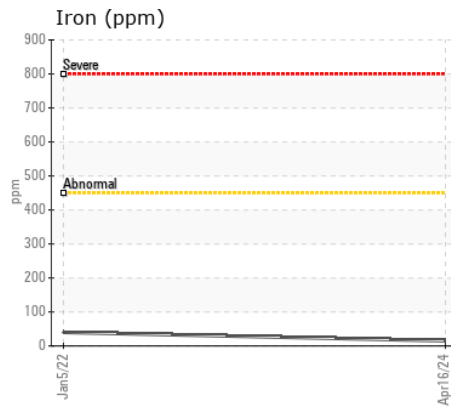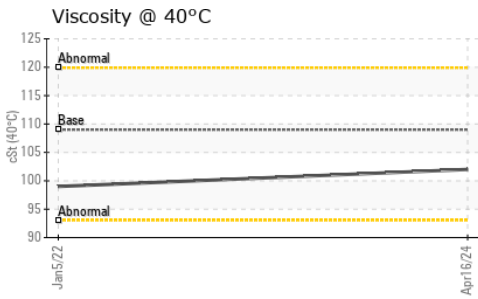

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : LH0276292
Lab Number : 02629785
Unique Number : 5762917
Test Package : MOB 1
Received : 17 Apr 2024
Tested : 18 Apr 2024
Diagnosed : 18 Apr 2024 - Wes Davis

ELG Canada
 4375 CORPORATE DRIVE
 BURLINGTON, ON
 CA L7L 5P7
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
 F: (905)335-9687