



Machine Id  
**901087**  
Component  
**Diesel Engine**  
Fluid  
**SAE 10W30 (--- GAL)**

### RECOMMENDATION

Nous vous recommandons de vérifier le système d'injection de carburant. Nous avons pris note que la vidange d'huile a été effectuée au moment de l'échantillonnage. Nous vous recommandons d'échantillonner de nouveau dès que possible afin de contrôler la situation.

### WEAR

Usure de la soupape d'échappement.













### CONTAMINATION

Quantité élevée de carburant dans l'huile. Les tests confirment la présence de carburant dans l'huile.

### FLUID CONDITION

Il y a du carburant dans l'huile, ce qui réduit la viscosité. l'huile n'est plus en état de service en raison d'une usure anormale et/ou sévère.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>GFL0114885</b>	---	---
Sample Date		Client Info		<b>15 Apr 2024</b>	---	---
Machine Age	kms	Client Info		<b>121708</b>	---	---
Oil Age	kms	Client Info		<b>0</b>	---	---
Filter Age	kms	Client Info		<b>0</b>	---	---
Oil Changed		Client Info		<b>Changed</b>	---	---
Filter Changed		Client Info		<b>Changed</b>	---	---
Sample Status				<b>SEVERE</b>	---	---
Iron	ppm	ASTM D5185(m)	>120	<b>13</b>	---	---
Chromium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	---	---
Nickel	ppm	ASTM D5185(m)	>5	<b>▲ 7</b>	---	---
Titanium	ppm	ASTM D5185(m)	>2	<b>0</b>	---	---
Silver	ppm	ASTM D5185(m)	>2	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185(m)	>20	<b>4</b>	---	---
Lead	ppm	ASTM D5185(m)	>40	<b>&lt;1</b>	---	---
Copper	ppm	ASTM D5185(m)	>330	<b>3</b>	---	---
Tin	ppm	ASTM D5185(m)	>15	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	---	---
White Metal	scalar	Visual*	NONE	<b>VLITE</b>	---	---
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	---	---
Silicon	ppm	ASTM D5185(m)	>25	<b>2</b>	---	---
Potassium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	---	---
Fuel	%	ASTM D7593*	>3.0	<b>▲ 7.7</b>	---	---
Water		WC Method	>0.2	<b>NEG</b>	---	---
Glycol		WC Method		<b>NEG</b>	---	---
Soot %	%	ASTM D7844*	>4	<b>0.2</b>	---	---
Nitration	Abs/cm	ASTM D7624*	>20	<b>9.7</b>	---	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>21.6</b>	---	---
Silt	scalar	Visual*	NONE	<b>NONE</b>	---	---
Debris	scalar	Visual*	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	---	---
Appearance	scalar	Visual*	NORML	<b>NORML</b>	---	---
Odor	scalar	Visual*	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	---	---
Sodium	ppm	ASTM D5185(m)	>228	<b>6</b>	---	---
Boron	ppm	ASTM D5185(m)		<b>2</b>	---	---
Barium	ppm	ASTM D5185(m)		<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185(m)		<b>52</b>	---	---
Manganese	ppm	ASTM D5185(m)		<b>&lt;1</b>	---	---
Magnesium	ppm	ASTM D5185(m)		<b>854</b>	---	---
Calcium	ppm	ASTM D5185(m)		<b>922</b>	---	---
Phosphorus	ppm	ASTM D5185(m)		<b>825</b>	---	---
Zinc	ppm	ASTM D5185(m)		<b>1032</b>	---	---
Sulfur	ppm	ASTM D5185(m)		<b>1980</b>	---	---
Oxidation	Abs/.1mm	ASTM D7414*	>25	<b>16.8</b>	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	11.0	<b>▲ 9.3</b>	---	---

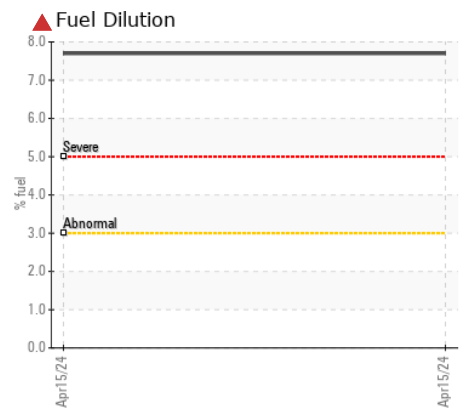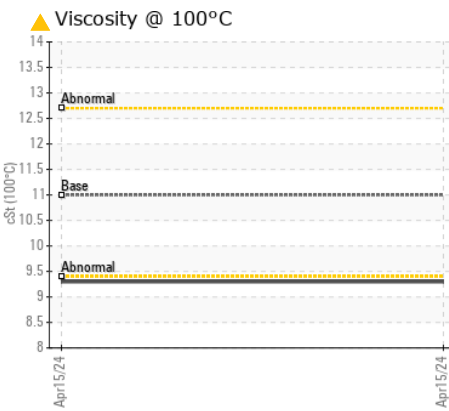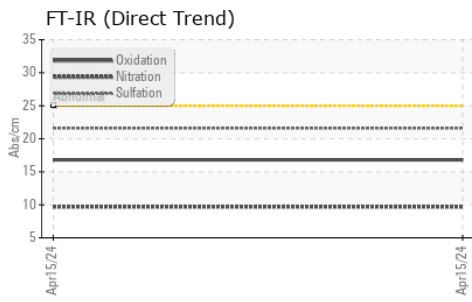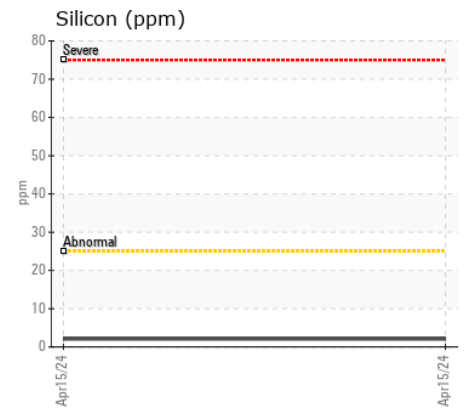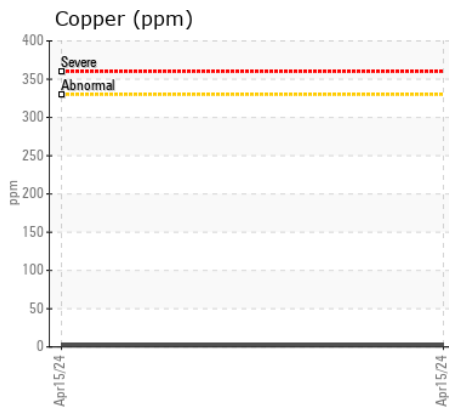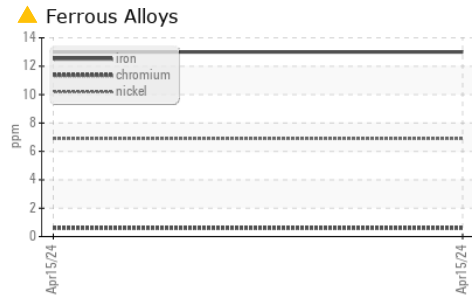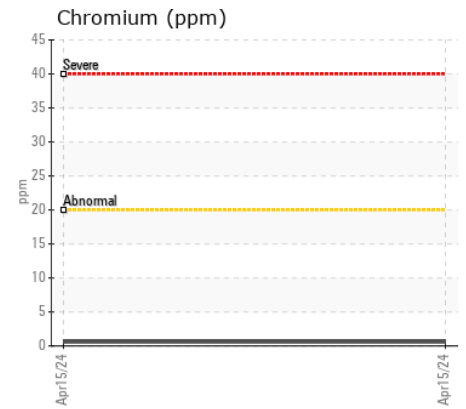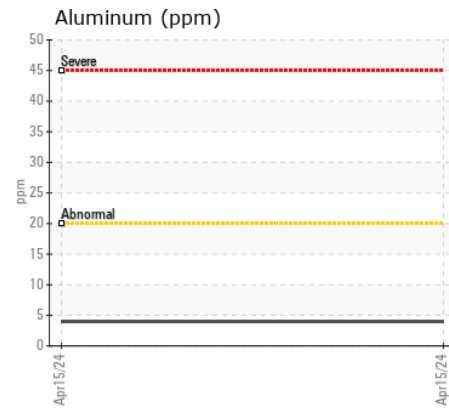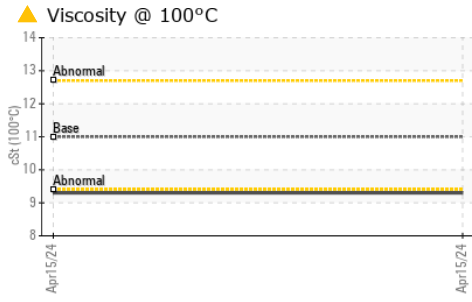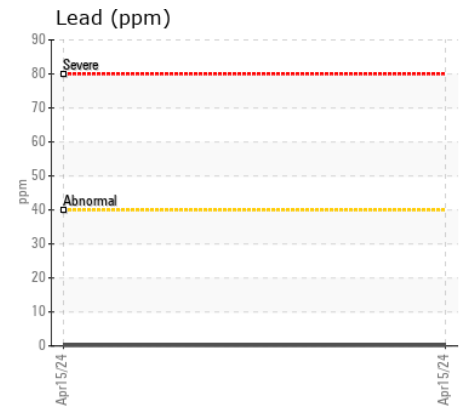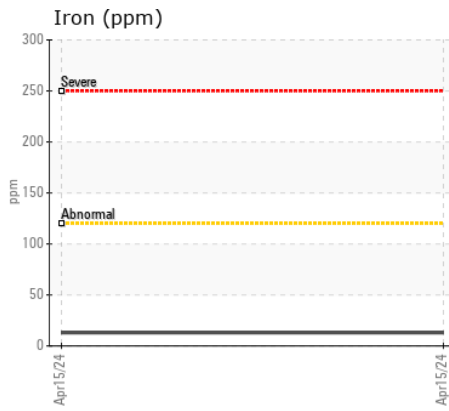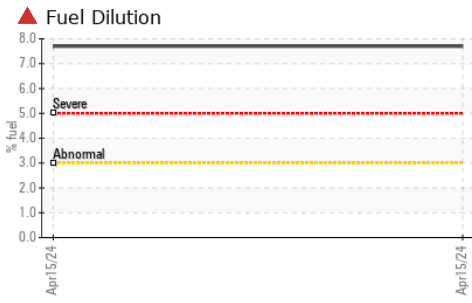

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : GFL0114885 **Received** : 18 Apr 2024  
**Lab Number** : 02629886 **Tested** : 19 Apr 2024  
**Unique Number** : 5763018 **Diagnosed** : 19 Apr 2024 - Kevin Marson  
**Test Package** : MOB 1 ( Additional Tests: FuelDilution, PercentFuel, Visual )

**GFL Environmental - 780 - GMA - ICI - Solid Waste**  
 4365 boul. St-Elzear Ouest,  
 Laval, QC  
 CA H7P 4J3  
 Contact: Pieces Laval  
 pieces.laval@gflenv.com  
 T: (450)687-3838  
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.