



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
701056

Component
Transmission (Auto)

Fluid
PETRO CANADA DURADRIIVE HD SYNTHETIC ATF (--- GAL)

RECOMMENDATION

Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0114800	GFL0097055	GFL0073456
Sample Date		Client Info		05 Apr 2024	13 Oct 2023	25 Apr 2023
Machine Age	hrs	Client Info		13837	13178	12206
Oil Age	hrs	Client Info		0	1200	1200
Filter Age	hrs	Client Info		0	1200	1200
Oil Changed		Client Info		Not Changed	Not Changed	Not Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

Les taux d'usure de tous les composants sont normaux.

Iron	ppm	ASTM D5185(m)	>300	34	41	24
Chromium	ppm	ASTM D5185(m)	>2	0	0	0
Nickel	ppm	ASTM D5185(m)	>4	0	0	0
Titanium	ppm	ASTM D5185(m)	>3	0	0	0
Silver	ppm	ASTM D5185(m)	>5	0	<1	0
Aluminum	ppm	ASTM D5185(m)	>70	16	16	7
Lead	ppm	ASTM D5185(m)	>85	19	14	5
Copper	ppm	ASTM D5185(m)	>90	13	13	7
Tin	ppm	ASTM D5185(m)	>10	2	3	2
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE

CONTAMINATION










Il n'y a aucun indice de contamination dans le fluide.

Silicon	ppm	ASTM D5185(m)	>20	5	7	6
Potassium	ppm	ASTM D5185(m)	>20	2	2	<1
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	VLITE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	NEG

FLUID CONDITION

L'état de le fluide est acceptable pour la durée de service.

Sodium	ppm	ASTM D5185(m)		38	56	51
Boron	ppm	ASTM D5185(m)		39	39	43
Barium	ppm	ASTM D5185(m)		0	<1	0
Molybdenum	ppm	ASTM D5185(m)		0	0	0
Manganese	ppm	ASTM D5185(m)		<1	0	<1
Magnesium	ppm	ASTM D5185(m)		3	<1	<1
Calcium	ppm	ASTM D5185(m)		118	122	125
Phosphorus	ppm	ASTM D5185(m)		220	215	227
Zinc	ppm	ASTM D5185(m)		47	11	4
Sulfur	ppm	ASTM D5185(m)		1336	1439	1498
Visc @ 40°C	cSt	ASTM D7279(m)	36.1	33.0	32.8	32.8

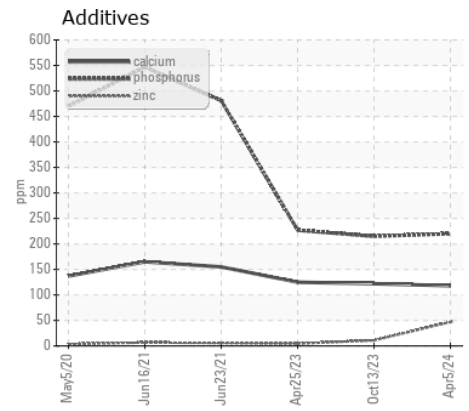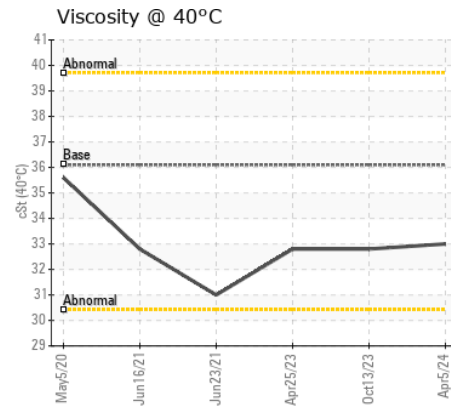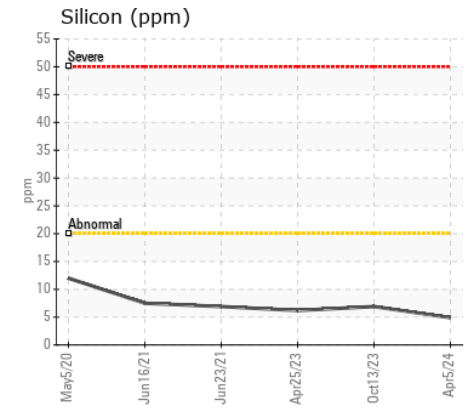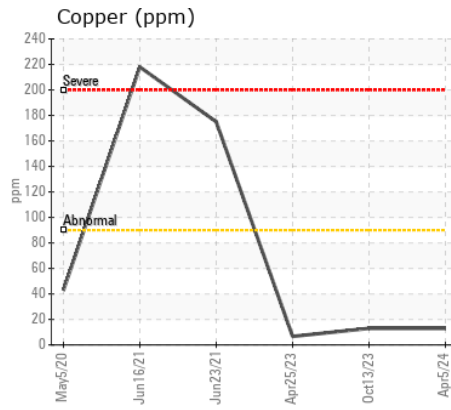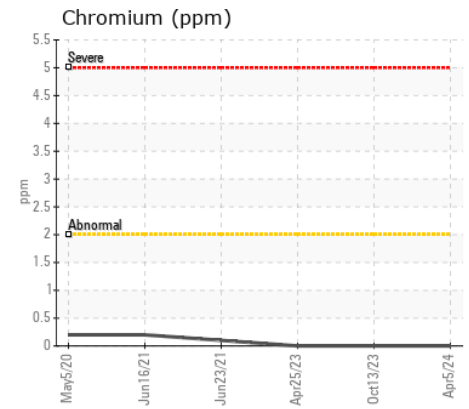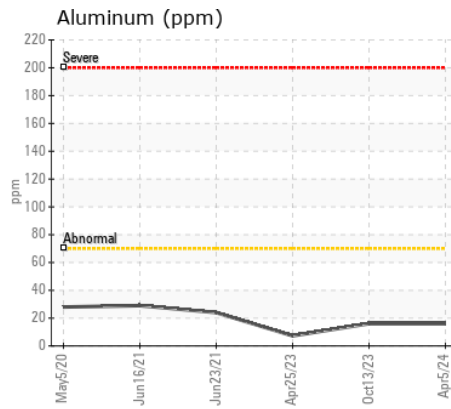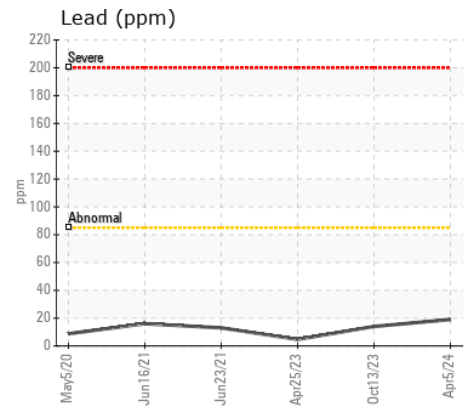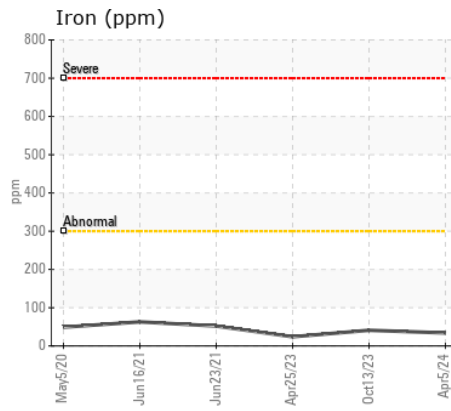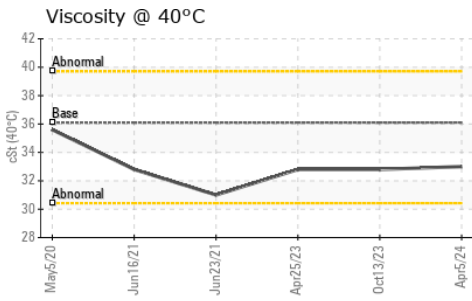

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0114800
Lab Number : 02629972
Unique Number : 5763104
Test Package : MOB 1
Received : 18 Apr 2024
Tested : 18 Apr 2024
Diagnosed : 18 Apr 2024 - Wes Davis

GFL Environmental - 780 - GMA - ICI - Solid Waste
 4365 boul. St-Elzear Ouest,
 Laval, QC
 CA H7P 4J3
 Contact: Pieces Laval
 pieces.laval@gflenv.com
 T: (450)687-3838
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.