



Machine Id
813096
Component
Transmission (Auto)
Fluid
DEXRON III (--- LTR)

RECOMMENDATION

Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition.

WEAR

Les taux d'usure de tous les composants sont normaux.










CONTAMINATION

Il n'y a aucun indice de contamination dans le fluide.

FLUID CONDITION

L'état de le fluide est acceptable pour la durée de service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0116311	GFL0096616	PC0078097
Sample Date		Client Info		08 Apr 2024	20 Dec 2023	04 Oct 2023
Machine Age	hrs	Client Info		0	17813	9543
Oil Age	hrs	Client Info		1200	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changd	Not Changd	N/A
Filter Changed		Client Info		Not Changd	Not Changd	N/A
Sample Status				NORMAL	NORMAL	NORMAL
Iron	ppm	ASTM D5185(m)	>220	64	52	65
Chromium	ppm	ASTM D5185(m)	>2	0	0	0
Nickel	ppm	ASTM D5185(m)	>5	<1	<1	<1
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)	>5	0	0	<1
Aluminum	ppm	ASTM D5185(m)	>75	20	15	14
Lead	ppm	ASTM D5185(m)	>95	12	7	7
Copper	ppm	ASTM D5185(m)	>60	27	23	30
Tin	ppm	ASTM D5185(m)	>10	3	2	2
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	VLITE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Silicon	ppm	ASTM D5185(m)	>25	5	8	6
Potassium	ppm	ASTM D5185(m)	>20	4	5	3
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	VLITE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	VLITE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	NEG
Sodium	ppm	ASTM D5185(m)		5	5	12
Boron	ppm	ASTM D5185(m)		49	52	72
Barium	ppm	ASTM D5185(m)		<1	<1	<1
Molybdenum	ppm	ASTM D5185(m)		0	0	0
Manganese	ppm	ASTM D5185(m)		1	<1	<1
Magnesium	ppm	ASTM D5185(m)		1	1	1
Calcium	ppm	ASTM D5185(m)		126	124	132
Phosphorus	ppm	ASTM D5185(m)		199	203	243
Zinc	ppm	ASTM D5185(m)		6	4	7
Sulfur	ppm	ASTM D5185(m)		1424	1527	1499
Visc @ 40°C	cSt	ASTM D7279(m)	26.0	32.3	32.9	33.2

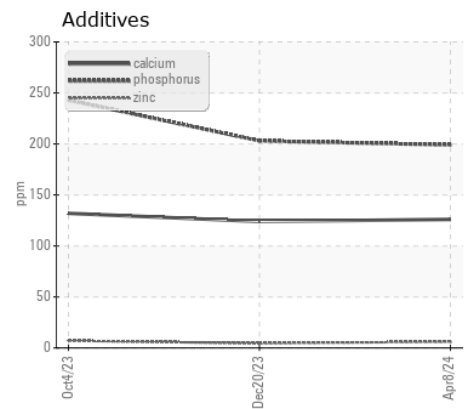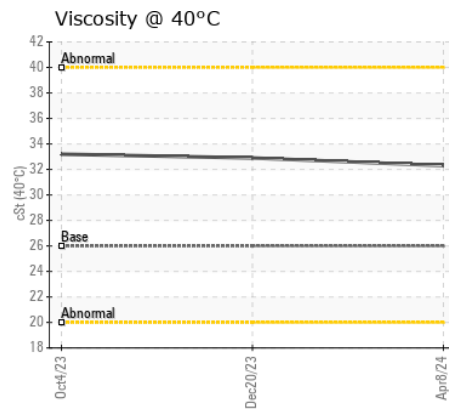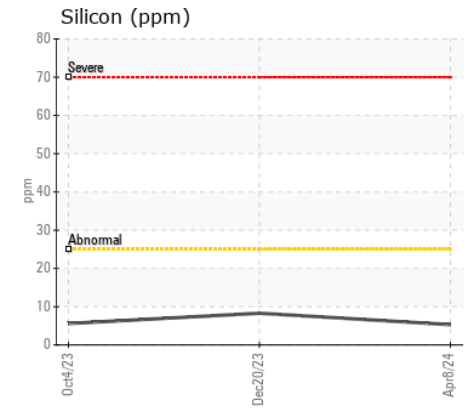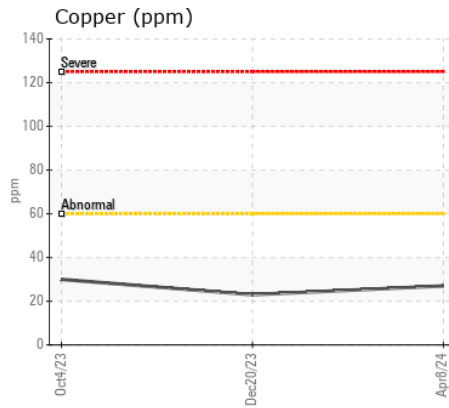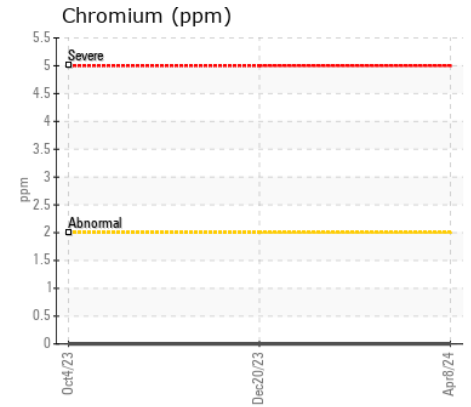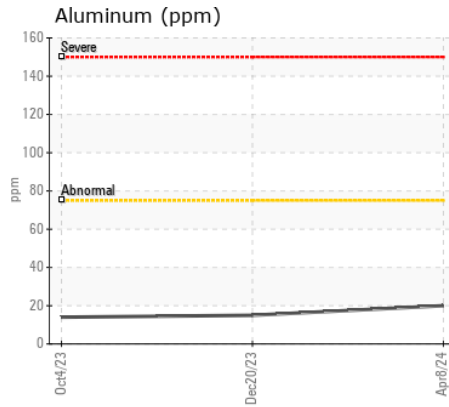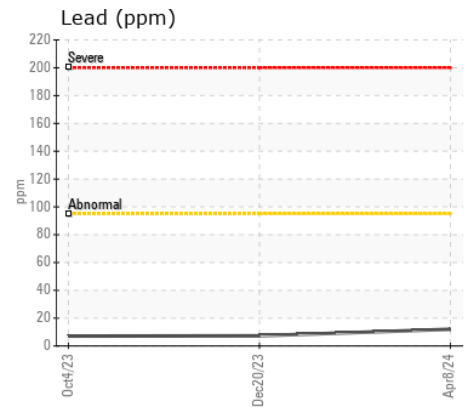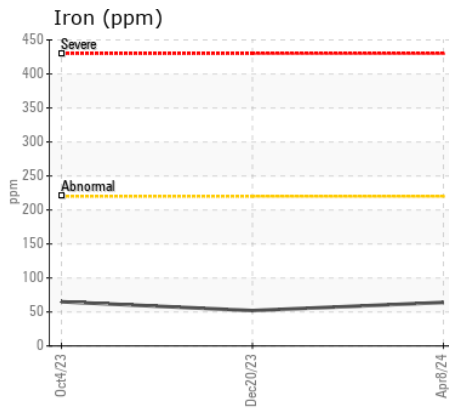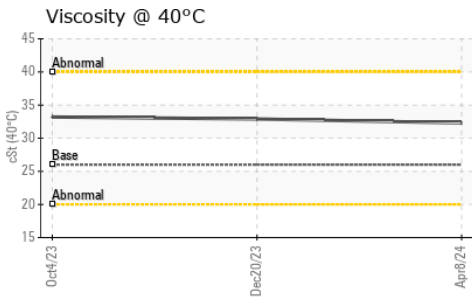

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0116311
Lab Number : 02629979
Unique Number : 5763111
Test Package : MOB 1

GFL Environmental - 736 - Trois-Rivieres
 2920 Bellefeuille,
 Trois-Rivieres, QC
 CA G9A 5R5
 Contact: Jean Demontigny
 jdemontigny@matrec.ca
 T: (819)378-4881
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.