



# VOLVO

## OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Area  
**THOMPSON**  
Machine Id  
**VOLVO A45G 352051**  
Component  
**Drop Box**  
Fluid  
**VOLVO SUPER GEAR OIL 75W-80-GO102 (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>VCP275183</b>	---	---
Sample Date		Client Info		<b>12 Apr 2024</b>	---	---
Machine Age	hrs	Client Info		<b>6000</b>	---	---
Oil Age	hrs	Client Info		<b>0</b>	---	---
Filter Age	hrs	Client Info		<b>0</b>	---	---
Oil Changed		Client Info		<b>Not Changd</b>	---	---
Filter Changed		Client Info		<b>N/A</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>500	<b>85</b>	---	---
Chromium	ppm	ASTM D5185(m)	>20	<b>1</b>	---	---
Nickel	ppm	ASTM D5185(m)	>10	<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185(m)		<b>0</b>	---	---
Silver	ppm	ASTM D5185(m)		<b>0</b>	---	---
Aluminum	ppm	ASTM D5185(m)	>30	<b>4</b>	---	---
Lead	ppm	ASTM D5185(m)	>30	<b>0</b>	---	---
Copper	ppm	ASTM D5185(m)	>30	<b>&lt;1</b>	---	---
Tin	ppm	ASTM D5185(m)	>20	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	---	---
White Metal	scalar	Visual*	NONE	<b>VLITE</b>	---	---
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	---	---

### CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>50	<b>4</b>	---	---
Potassium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	---	---
Water		WC Method	>0.2	<b>NEG</b>	---	---
Silt	scalar	Visual*	NONE	<b>VLITE</b>	---	---
Debris	scalar	Visual*	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	---	---
Appearance	scalar	Visual*	NORML	<b>NORML</b>	---	---
Odor	scalar	Visual*	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	---	---

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		<b>&lt;1</b>	---	---
Boron	ppm	ASTM D5185(m)		<b>157</b>	---	---
Barium	ppm	ASTM D5185(m)		<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185(m)		<b>&lt;1</b>	---	---
Manganese	ppm	ASTM D5185(m)		<b>1</b>	---	---
Magnesium	ppm	ASTM D5185(m)		<b>&lt;1</b>	---	---
Calcium	ppm	ASTM D5185(m)		<b>56</b>	---	---
Phosphorus	ppm	ASTM D5185(m)		<b>1039</b>	---	---
Zinc	ppm	ASTM D5185(m)		<b>25</b>	---	---
Sulfur	ppm	ASTM D5185(m)		<b>21977</b>	---	---
Visc @ 40°C	cSt	ASTM D7279(m)		<b>97.1</b>	---	---

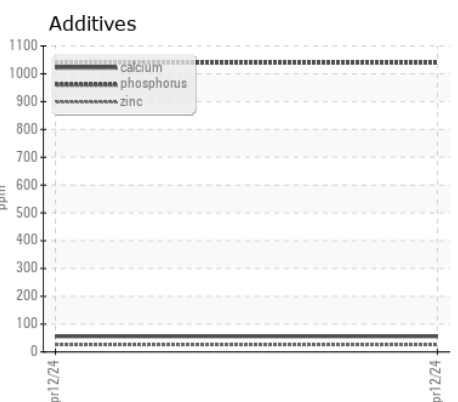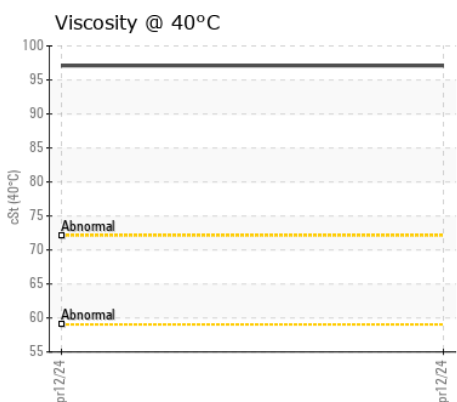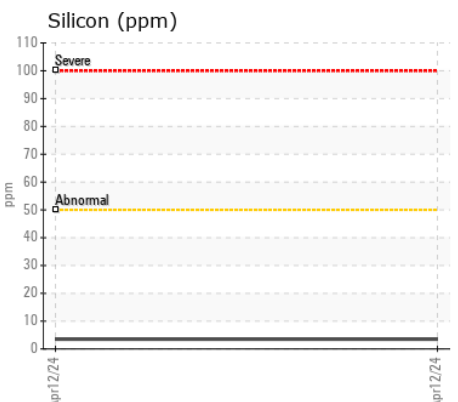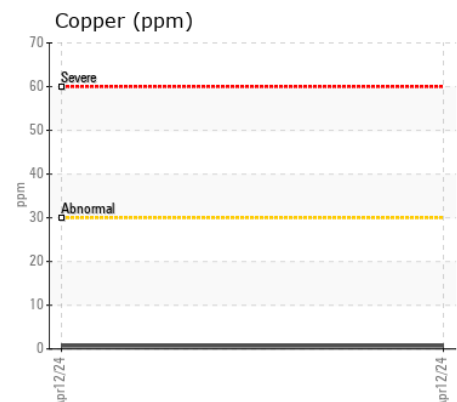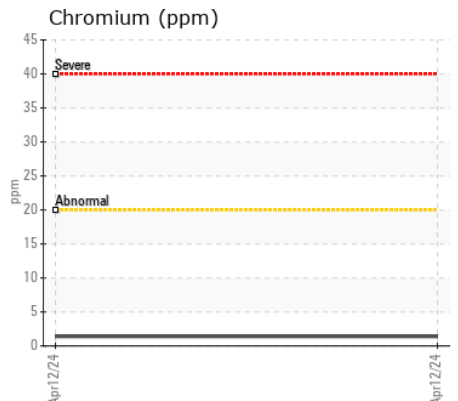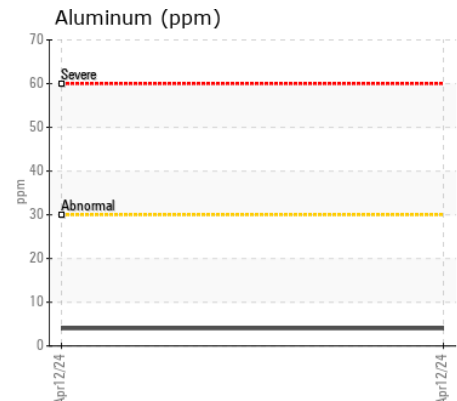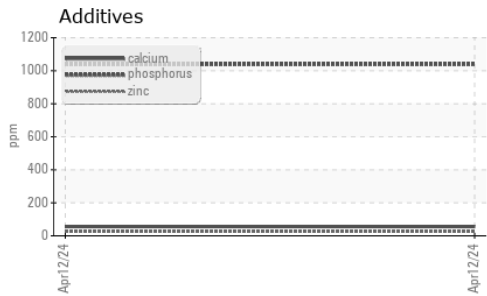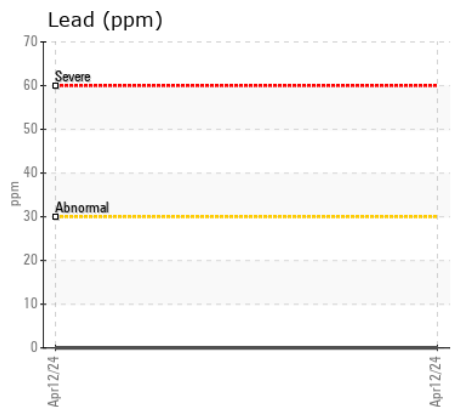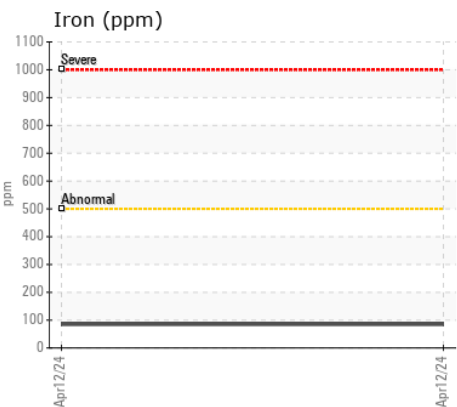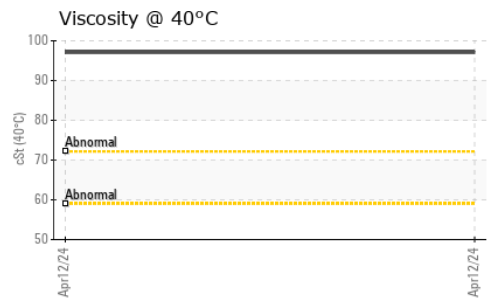

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : VCP275183 **Received** : 18 Apr 2024  
**Lab Number** : 02629987 **Tested** : 18 Apr 2024  
**Unique Number** : 5763119 **Diagnosed** : 18 Apr 2024 - Wes Davis  
**Test Package** : MOB 1

**STRONGCO EQUIPMENT (AB)**  
 205 MACALPINE CRES.  
 FORT MCMURRAY, AB  
 CA T9H 4A6  
 Contact: Chris Murgatroyd  
 cmurgatroyd@strongco.com  
 T: (780)799-4201  
 F: (780)743-9525

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.